

ACT20P-CMT-10-AO-RC-P**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Similar to illustration**ACT20P: The flexible solution**

- Precise and highly functional signal converters
- Release levers simplify handling

General ordering data

Version	Current-measuring transducer, Limit value monitoring, Input : 0...5/10 A, Analogue output, Relay output, Current-carrying cable in feed-through hole
Order No.	1510330000
Type	ACT20P-CMT-10-AO-RC-P
GTIN (EAN)	4050118319378
Qty.	1 items

ACT20P-CMT-10-AO-RC-P

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

Approvals CE; CULUS; DETNORVER

Approvals CULUS;

Approvals



ROHS Conform

UL File Number Search [UL Website](#)

Certificate no. (cULus) E141197

Dimensions and weights

Depth	114 mm	Depth (inches)	4.4882 inch
Height	127.1 mm	Height (inches)	5.0039 inch
Width	22.8 mm	Width (inches)	0.8976 inch
Net weight	158 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-25 °C...60 °C
Humidity	5...95 %, no condensation		

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c, 7a, 7cl
REACH SVHC	Lead 7439-92-1
SCIP	2f6dd957-421a-46db-a0c2-cf1609156924

Input

Number inputs	1	Input frequency	AC: 15...700 Hz (true root mean square)
Input measurement range	configurable, 0...5/10 A AC (RMS) or DC, max. peak current $10 \times I_{\text{input}}$ (1 s), max. peak current $2 \times I_{\text{input}}$ (1 s) @ 5/10 A DC, For DC current measurement (AA): Current direction display at the output (-/+ analog value), max. peak current $2 \times I_{\text{input}}$ (1 s)	Input signal	Current-carrying cable in feed-through hole
Overload behaviour	Max. peak current: $10 \times I_{\text{input}}$ for 1s		

Output

Type	active, connected control must be passive
------	---

Output (digital)

Rated switching current	6 A	Continuous current	$2 \times I_{\text{input}}$
Number of digital outputs	1	Max. switching voltage, AC	250 V

ACT20P-CMT-10-AO-RC-P

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Max. switching voltage, DC	24 V	Type	Relay, 1 CO contact, normal / inverse adjustment
Alarm function	Surge current, Under-current, Alarm limit setting: 2 - 105 %, Hysteresis 5% / 10%, Alarm delay: 0...10 s		

Output (analogue)

Transmit function	direct or inverted	Output voltage	Adjustable, 0...10 V, 2...10 V, 0...5 V, 1...5 V, -5...+5 V, -10...+10 V
Load resistance voltage	$\geq 10 \text{ k}\Omega$	Number analogue outputs	1
Load resistance current	$\leq 600 \text{ }\Omega$	Output current	Adjustable, 0...20 mA, 4...20 mA, -20...+20 mA

General data

Accuracy	$<0.75 \text{ \% FSR}$	Protection degree	IP20
Supply voltage	16,8 V...31,2 V	Step response time	$\leq 300 \text{ ms (RMS)}, \leq 60 \text{ ms (AA)}$
Mounting rail	TS 35	Temperature coefficient	$\leq \pm 100 \text{ ppm/K @ -25...+55 }^\circ\text{C}, \leq \pm 200 \text{ ppm/K @ +55...+70 }^\circ\text{C}$
Configuration	DIP switch and potentiometer	Power consumption, max.	2.2 W
Power consumption, typ.	0.9 W		

Insulation coordination

Impulse withstand voltage	6.4 kV (1.2/50 μs)	EMC standards	EN 61326-1
Test voltage	4 kV	Surge voltage category	III
Pollution severity	2	Galvanic isolation	4-way isolator, between input / output / supply / relay
Insulation voltage	4 kVeff / 1 min.	Rated voltage	300 V ACrms

Connection data

Type of connection	PUSH IN	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 14
Wire cross-section, solid, min.	0.2 mm ²	Wire cross-section, solid, max.	2.5 mm ²
Wire connection cross section, finely stranded, min.	0.2 mm ²	Wire connection cross section, finely stranded, max.	2.5 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.2 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	2.5 mm ²

Part description

Product description	The ACT20P-CMT-XX-(AO)-RC-P series of devices measure and monitor AC and DC currents of up to 60 A. The real effective value method used allows for precise measurement, even for distorted current curve shapes. The devices feature integrated limit value monitoring with an adjustable switching threshold, delay and hysteresis, as well as a relay output.. Features • Real effective value measurement (True RMS) or arithmetic averaging (AA) measurement and contactless through-hole technology
---------------------	---

ACT20P-CMT-10-AO-RC-P**Weidmüller Interface GmbH & Co. KG**Klingenbergstraße 26
D-32758 Detmold
Germanywww.weidmueller.com**Technical data**

- Limit value monitoring for overcurrent or undercurrent
- Relay output by means of the open-circuit / closed-circuit principle
- Adjustable trigger delay for filtering current peaks
- Operational status and error display on a front panel LED and output signalling according to NE43, NE44, NE107
- Galvanic four-way insulation for secure isolation according to IEC/EN 61010-2-201

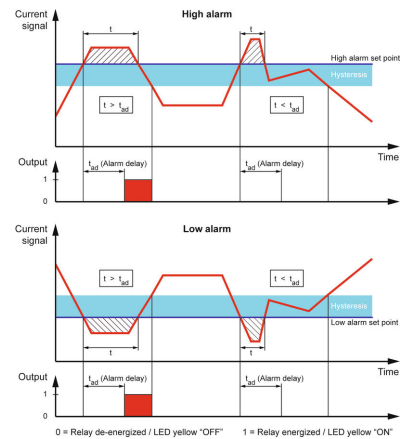
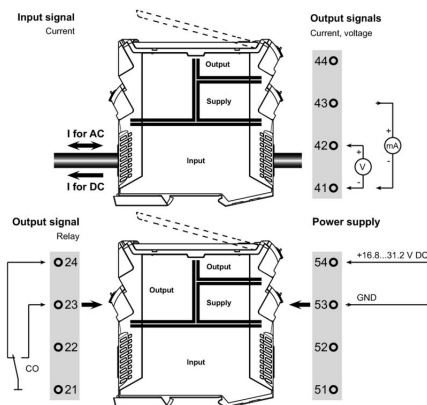
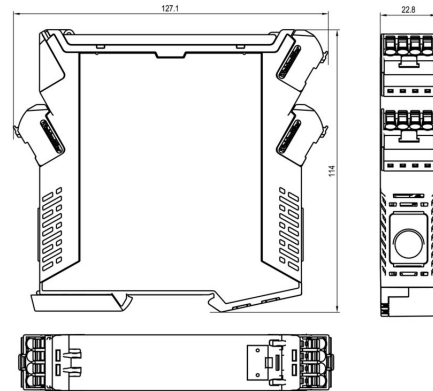
Classifications

ETIM 8.0	EC002475	ETIM 9.0	EC002475
ETIM 10.0	EC002475	ECLASS 14.0	27-21-01-23
ECLASS 15.0	27-21-01-23		

ACT20P-CMT-10-AO-RC-P

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

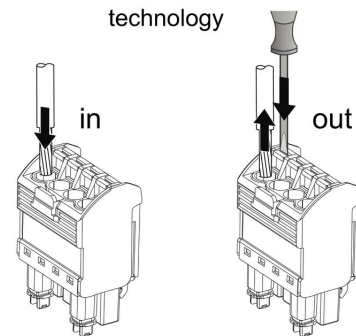
www.weidmueller.com

Drawings
Dimensioned drawing


Configuration

DIP switch S1	
Current input range	1 2 3 4 5 6 7 8
0...5 A	
0...10 A	
Measuring method	1 2 3 4 5 6 7 8
True RMS	
Arithmetic average	
Alarm delay time	1 2 3 4 5 6 7 8
0 s	
2 s	
5 s	
10 s	
Measuring range monitoring	1 2 3 4 5 6 7 8
Yes	
No	
Output error action	1 2 3 4 5 6 7 8
Upscale	
Downscale	
Transfer function	1 2 3 4 5 6 7 8
Normal	
Inverse	

DIP switch S2	
Output range	1 2 3 4 5 6 7 8
0...10 V	
2...10 V	
0...5 V	
1...5 V	
-5...+5 V	
-10...+10 V	
0...20 mA	
4...20 mA	
-20...+20 mA	
Alarm relay action	1 2 3 4 5 6 7 8
Energized	
De-energized	
Alarm hysteresis	1 2 3 4 5 6 7 8
5 %	
10 %	
Alarm type	1 2 3 4 5 6 7 8
High alarm	
Low alarm	

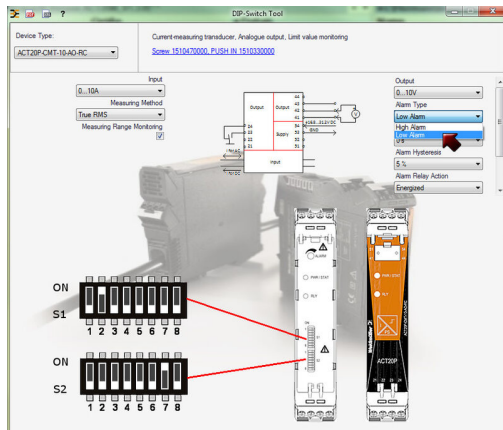
PUSH IN technology


ACT20P-CMT-10-AO-RC-P

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

Drawings

www.weidmueller.com



example for DIP switch setting (with ACT20 tool)