

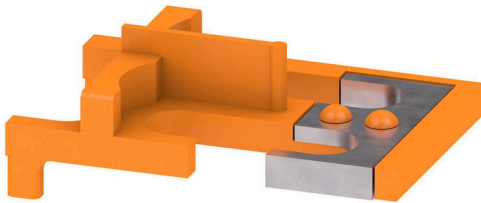
QVS 2 SAKT1+2**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image**Current and voltage transformer wiring**

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

General ordering data

| | |
|------------|--|
| Version | Cross-connector (terminal), when screwed in, beige, 41 A, Number of poles: 2, Pitch in mm (P): 12.00, Insulated: Yes, Width: 15.4 mm |
| Order No. | 0307300000 |
| Type | QVS 2 SAKT1+2 |
| GTIN (EAN) | 4008190036140 |
| Qty. | 20 items |

QVS 2 SAKT1+2

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Dimensions and weights

| | | | |
|------------|---------|-----------------|-------------|
| Depth | 2.5 mm | Depth (inches) | 0.0984 inch |
| Height | 23.7 mm | Height (inches) | 0.9331 inch |
| Width | 15.4 mm | Width (inches) | 0.6063 inch |
| Net weight | 0.95 g | | |

Temperatures

| | | | |
|----------------------------------|----------------|----------------------------------|----------------|
| Storage temperature | -25 °C...55 °C | Ambient temperature | -50 °C...55 °C |
| Continuous operating temp., min. | -50 °C | Continuous operating temp., max. | 100 °C |

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC | No SVHC above 0.1 wt% |

Material data

| | | | |
|---------------------------|-------|--------|-------|
| Basic material | PA 66 | Colour | beige |
| UL 94 flammability rating | V-2 | | |

System specifications

| | |
|---------|-----------------|
| Version | Cross-connector |
|---------|-----------------|

Additional technical data

| | | | |
|--------------------------|-----------------|---------------------|-----------------|
| Type of fixing | when screwed in | Installation advice | Direct mounting |
| Explosion-tested version | No | Type of mounting | when screwed in |

Dimensions

| | |
|-----------------|----------|
| Pitch in mm (P) | 12.00 mm |
|-----------------|----------|

General

| | | | |
|-----------------|---|---------------------|-----------------|
| Number of poles | 2 | Installation advice | Direct mounting |
|-----------------|---|---------------------|-----------------|

Rating data

| | | | |
|---------------|-------|-----------------|------|
| Rated voltage | 400 V | Nominal current | 41 A |
|---------------|-------|-----------------|------|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 8.0 | EC000489 | ETIM 9.0 | EC000489 |
| ETIM 10.0 | EC000489 | ECLASS 14.0 | 27-25-03-03 |
| ECLASS 15.0 | 27-25-03-03 | | |