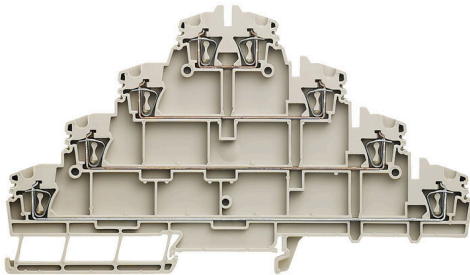


**ZVLD 2.5****Weidmüller Interface GmbH & Co. KG**Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

**Product image**

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

**General ordering data**

|            |  |
|------------|--|
| Version    | Multi-tier modular terminal, Tension-clamp connection, 2.5 mm <sup>2</sup> , 250 V, 20 A, dark beige |
| Order No.  | <a href="#">1208920000</a>   |
| Type       | ZVLD 2.5   |
| GTIN (EAN) | 4032248990320  |
| Qty.       | 50 items   |

## ZVLD 2.5

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Dimensions and weights

|                          |             |                |             |
|--------------------------|-------------|----------------|-------------|
| Depth                    | 85 mm       | Depth (inches) | 3.3464 inch |
| Depth including DIN rail | 86 mm       | Height         | 148 mm      |
| Height (inches)          | 5.8268 inch | Width          | 5.1 mm      |
| Width (inches)           | 0.2008 inch | Net weight     | 27 g        |

## Temperatures

|                                  |                |                                  |                |
|----------------------------------|----------------|----------------------------------|----------------|
| Storage temperature              | -25 °C...55 °C | Ambient temperature              | -50 °C...75 °C |
| Continuous operating temp., min. | -50 °C         | Continuous operating temp., max. | 120 °C         |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Material data

|                           |       |        |            |
|---------------------------|-------|--------|------------|
| Basic material            | Wemid | Colour | dark beige |
| UL 94 flammability rating | V-0   |        |            |

## System specifications

|                                     |  |                                   |       |
|-------------------------------------|--|-----------------------------------|-------|
| Version                             | Tension-clamp connection, for plug-in cross-connector, One end without connector | End cover plate required          | Yes   |
| Number of potentials                | 4  | Number of levels                  | 4     |
| Number of clamping points per level | 2  | Levels cross-connected internally | No    |
| PE connection                       | No   | Mounting rail                     | TS 35 |

## Additional technical data

|                     |                 |                          |    |
|---------------------|-----------------|--------------------------|----|
| Installation advice | Direct mounting | Explosion-tested version | No |
| Type of mounting    | Snap-on         |                          |    |

## Conductors for clamping (additional connection)

|  |                  |
|--|------------------|
| Connection type, additional connection | Screw connection |
|--|------------------|

## Conductors for clamping (rated connection)

|   |                          |
|---|--------------------------|
| Gauge to IEC 60947-1                    | A2                       |
| Wire connection cross section AWG, max. | AWG 16                   |
| Connection direction                    | top                      |
| Stripping length                        | 10 mm                    |
| Type of connection 2                    | Screw connection         |
| Type of connection                      | Tension-clamp connection |
| Number of connections                   | 8                        |
| Clamping range, max.                    | 2.5 mm <sup>2</sup>      |
| Clamping range, min.                    | 0.14 mm <sup>2</sup>     |

## ZVLD 2.5

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

|   |  |  |                      |
|---|--|--|----------------------|
| Blade size  | 0.6 x 3.5 mm                           |  |                      |
| Wire connection cross section AWG, min.   | AWG 26                                 |  |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 2.5 mm <sup>2</sup>                    |  |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.14 mm <sup>2</sup>                   |  |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 2.5 mm <sup>2</sup>                    |  |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.14 mm <sup>2</sup>                   |  |                      |
| Wire connection cross section, finely stranded, max.                                    | 2.5 mm <sup>2</sup>                    |  |                      |
| Wire connection cross section, finely stranded, min.                                    | 0.14 mm <sup>2</sup>                   |  |                      |
| Connection cross-section, stranded, max.  | 2.5 mm <sup>2</sup>                    |  |                      |
| Connection cross-section, stranded, min.  | 0.14 mm <sup>2</sup>                   |  |                      |
| Wire connection cross-section, solid core, max.   | 2.5 mm <sup>2</sup>                    |  |                      |
| Wire connection cross-section, solid core, min.   | 0.14 mm <sup>2</sup>                   |  |                      |
| Connection cross-section, finely stranded, min.   | 0.14 mm <sup>2</sup>                   |  |                      |
| Tube length for wire-end ferrule with plastic collar DIN 46228/4                        | Tube length                            | min.                                   | 6 mm                 |
|   |  | max.                                   | 10 mm                |
|   | Cross-section for conductor connection | nominal                                | 0.5 mm <sup>2</sup>  |
|   |  | Tube length                            | min.                 |
|   |  | max.                                   | 10 mm                |
|   | Cross-section for conductor connection | nominal                                | 0.75 mm <sup>2</sup> |
|   |  | Tube length                            | min.                 |
|   |  | max.                                   | 10 mm                |
|   | Cross-section for conductor connection | nominal                                | 1 mm <sup>2</sup>    |
|   |  | Tube length                            | min.                 |
|   |  | max.                                   | 10 mm                |
|   | Cross-section for conductor connection | nominal                                | 1.5 mm <sup>2</sup>  |
| Tube length   |  | nominal                                | 8 mm                 |
| Cross-section for conductor connection  | nominal                                | 2.5 mm <sup>2</sup>                    |                      |
|   | Tube length                            | nominal                                | 10 mm                |
| Tube length for wire-end ferrule without plastic collar DIN 46228/1                     | Tube length                            | nominal                                | 10 mm                |
|   |  | Cross-section for conductor connection | nominal              |
|   | Tube length                            | nominal                                | 10 mm                |
|   |  | Cross-section for conductor connection | nominal              |
|   | Tube length                            | nominal                                | 10 mm                |
|   |  | Cross-section for conductor connection | nominal              |
|   | Tube length                            | nominal                                | 10 mm                |
|   |  | Cross-section for conductor connection | nominal              |
|   | Tube length                            | nominal                                | 10 mm                |
|   |  | Cross-section for conductor connection | nominal              |

## General

|   |        |                     |                 |
|---|--------|---------------------|-----------------|
| Wire connection cross section AWG, max. | AWG 16 | Installation advice | Direct mounting |
| Wire connection cross section AWG, min. | AWG 26 | Standards           | IEC 60947-7-1   |
| Mounting rail                           | TS 35  |                     |                 |


**ZVLD 2.5****Weidmüller Interface GmbH & Co. KG**Klingenbergstraße 26  
D-32758 Detmold  
Germany[www.weidmueller.com](http://www.weidmueller.com)**Technical data****Rating data**

|  |                     |                                 |               |
|--|---------------------|---------------------------------|---------------|
| Rated cross-section                          | 2.5 mm <sup>2</sup> | Rated voltage                   | 250 V         |
| Rated DC voltage                             | 250 V               | Nominal current                 | 20 A          |
| Current at maximum wires                     | 20 A                | Standards                       | IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 1.33 mΩ             | Rated impulse withstand voltage | 6 kV          |
| Power loss in accordance with IEC 60947-7-x  | 0.77 W              | Pollution severity              | 3             |

**Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 8.0    | EC000897    | ETIM 9.0    | EC000897    |
| ETIM 10.0   | EC000897    | ECLASS 14.0 | 27-25-01-02 |
| ECLASS 15.0 | 27-25-01-02 |             |             |

Drawings

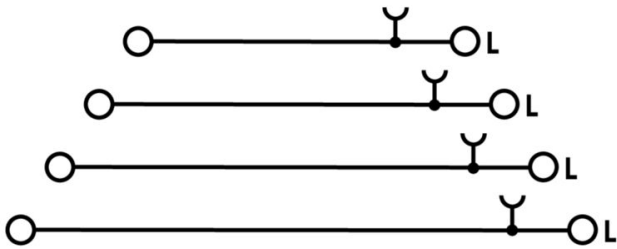

## ZVLD 2.5

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

## Cross-connections



The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | ZQV 2.5/2                  | Version   |
| Order No.  | <a href="#">1608860000</a> | Z-series, Cross-connector, 24 A                                   |
| GTIN (EAN) | 4008190123680              |   |
| Qty.       | 60 ST                      |   |
| Type       | ZQV 2.5/3                  | Version   |
| Order No.  | <a href="#">1608870000</a> | Accessories, Cross-connector, 24 A                                |
| GTIN (EAN) | 4008190061630              |   |
| Qty.       | 60 ST                      |   |
| Type       | ZQV 2.5/4                  | Version   |
| Order No.  | <a href="#">1608880000</a> | Accessories, Cross-connector, 24 A                                |
| GTIN (EAN) | 4008190082208              |   |
| Qty.       | 60 ST                      |   |
| Type       | ZQV 2.5/10                 | Version   |
| Order No.  | <a href="#">1608940000</a> | Accessories, Cross-connector, 24 A                                |
| GTIN (EAN) | 4008190099060              |   |
| Qty.       | 20 ST                      |   |
| Type       | ZQV 2.5/20                 | Version   |
| Order No.  | <a href="#">1908960000</a> | Z-series, Cross-connector, For the terminals, Number of poles: 20 |
| GTIN (EAN) | 4032248535293              |   |
| Qty.       | 20 ST                      |   |

## End plates and partition plates



Partition plates and end plates are essential accessories for terminal blocks. Partition plates provide optical and electrical separation of different potentials and functional groups, increasing safety and ensuring a clear structure inside the control cabinet. End plates close the terminal block row on the sides, protect against contact with live parts, and ensure a clean, stable finish. Both components are precisely matched to the respective Weidmüller terminal block series, contributing to safe, compliant, and professional wiring.

## General ordering data

|            |                            |                     |
|------------|----------------------------|---------------------|
| Type       | ZAP ZVLD 2.5               | Version             |
| Order No.  | <a href="#">1210410000</a> | Z-series, End plate |
| GTIN (EAN) | 4032248991440              |                     |
| Qty.       | 10 ST                      |                     |

## ZVLD 2.5

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

### End bracket



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

### General ordering data

|            |                            |   |  |
|------------|----------------------------|---|--|
| Type       | ZEW 35/2                   | Version   |  |
| Order No.  | <a href="#">8630740000</a> | End bracket, dark beige, TS 35, V-2, Wemid, Width: 8 mm, 100 °C |  |
| GTIN (EAN) | 4032248348916              |   |  |
| Qty.       | 20 ST                      |   |  |

### Testadapter and testsockets



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

### General ordering data

|            |                            |                                |  |
|------------|----------------------------|--------------------------------|--|
| Type       | ZTA ZVLD                   | Version                        |  |
| Order No.  | <a href="#">1210390000</a> | Accessories, Test adapter, 6 A |  |
| GTIN (EAN) | 4032248991426              |                                |  |
| Qty.       | 50 ST                      |                                |  |
| Type       | ZTA ZVLD/ZA                | Version                        |  |
| Order No.  | <a href="#">1271870000</a> | Accessories, Test adapter, 6 A |  |
| GTIN (EAN) | 4050118060850              |                                |  |
| Qty.       | 50 ST                      |                                |  |

## ZVLD 2.5

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.


Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
  - Strips for fast installation
  - Terminal markers, suitable for all Weidmüller cable connectors
  - Available as blank MultiCard or with standard printing
- For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |   |  |
|------------|----------------------------|---|--|
| Type       | DEK 5/5 MC NE WS           | Version   |  |
| Order No.  | <a href="#">1609801044</a> | Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 |  |
| GTIN (EAN) | 4008190397111              | Weidmueller, white  |  |
| Qty.       | 1000 ST                    |   |  |

## Cross-connections



The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

## General ordering data

|            |                            |                                    |  |
|------------|----------------------------|------------------------------------|--|
| Type       | ZVQ 2.5/1.5                | Version                            |  |
| Order No.  | <a href="#">1720700000</a> | Accessories, Cross-connector, 24 A |  |
| GTIN (EAN) | 4008190374006              |                                    |  |
| Qty.       | 50 ST                      |                                    |  |

## Slotted screwdriver



VDE insulated screwdriver sets, for working on live parts up to 1000 V AC and 1500 V DC, DIN EN 60900. IEC 900. Each piece is "GS" safety tested. Blade made from fully hardened, high-alloy chromium-vanadium-molybdenum steel, gun-metal finish.

## ZVLD 2.5

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

### General ordering data

|            |                            |   |  |
|------------|----------------------------|---|--|
| Type       | SDIS SLIM 0.6X3.5X100      | Version   |  |
| Order No.  | <a href="#">2749610000</a> | Mounting tool, Blade width (B): 3.5 mm, Blade length: 100 mm, Blade |  |
| GTIN (EAN) | 4050118896350              | thickness (A): 0.6 mm   |  |
| Qty.       | 1 ST                       |   |  |