

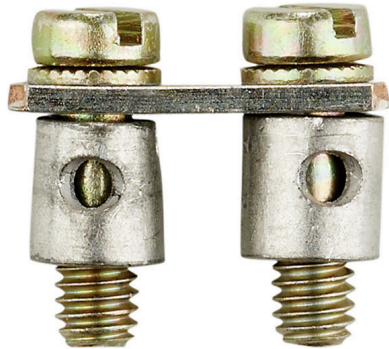
Q 2 DLI**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

General ordering data

| | |
|------------|---|
| Version | Cross-connector (terminal), when screwed in, grey, 24 A, Number of poles: 2, Pitch in mm (P): 6.10, Insulated: No, Width: 11.1 mm |
| Order No. | 1312500000 |
| Type | Q 2 DLI |
| GTIN (EAN) | 4008190039837 |
| Qty. | 50 items |

Q 2 DLI

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Dimensions and weights

| | | | |
|------------|---------|-----------------|-------------|
| Depth | 8 mm | Depth (inches) | 0.315 inch |
| Height | 4 mm | Height (inches) | 0.1575 inch |
| Width | 11.1 mm | Width (inches) | 0.437 inch |
| Net weight | 1.4 g | | |

Temperatures

| | | | |
|---------------------|----------------|---------------------|---------------|
| Storage temperature | -25 °C...55 °C | Ambient temperature | -5 °C...40 °C |
|---------------------|----------------|---------------------|---------------|

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC | No SVHC above 0.1 wt% |

Material data

| | | | |
|----------------|------|--------|------|
| Basic material | CuSn | Colour | grey |
|----------------|------|--------|------|

System specifications

| | |
|---------|---------------------------|
| Version | for cross-connection link |
|---------|---------------------------|

Additional technical data

| | | | |
|--------------------------|-----------------|---------------------|-----------------|
| Type of fixing | when screwed in | Installation advice | Direct mounting |
| Explosion-tested version | No | | |

Dimensions

| | |
|-----------------|---------|
| Pitch in mm (P) | 6.10 mm |
|-----------------|---------|

General

| | | | |
|-----------------|---|---------------------|-----------------|
| Number of poles | 2 | Installation advice | Direct mounting |
|-----------------|---|---------------------|-----------------|

Rating data

| | | | |
|---------------|-------|-----------------|------|
| Rated voltage | 400 V | Nominal current | 24 A |
|---------------|-------|-----------------|------|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 8.0 | EC000489 | ETIM 9.0 | EC000489 |
| ETIM 10.0 | EC000489 | ECLASS 14.0 | 27-25-03-03 |
| ECLASS 15.0 | 27-25-03-03 | | |