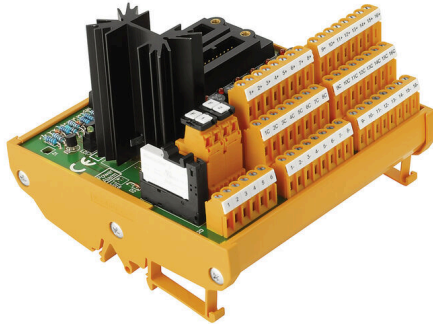


TBY-SAI143-F-L-PS-2KS-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Similar to illustration

Analogue interfaces are equipped with 40-pole connectors (KS). Versions are available with disconnecting plugs and test points which are extremely useful for voltage and current measurements. There are also versions with useful additional pins for customers who wish to incorporate other elements (resistor ...) for converting voltage/current or monitoring the current loop.

General ordering data

Version	Interface, RS, 2 x KS (40P), LP3R 5.08mm
Order No.	1371240000
Type	TBY-SAI143-F-L-PS-2KS-S
GTIN (EAN)	4050118207118
Qty.	1 items
Delivery status	This article will no longer be available in the future.
Available until	2026-02-10T00:00:00+01:00

TBY-SAI143-F-L-PS-2KS-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data
Approvals

Approvals



ROHS Conform

Dimensions and weights

Height	107 mm	Height (inches)	4.2126 inch
Width	131 mm	Width (inches)	5.1575 inch
Length	133 mm	Length (inches)	5.2362 inch
Net weight	432.55 g		

Temperatures

Storage temperature	-40...85 °C	Operating temperature	-25...70 °C
---------------------	-------------	-----------------------	-------------

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c, 7cl
REACH SVHC	Lead 7439-92-1
SCIP	f9d70a48-3ece-4d71-ba78-a0d617266ffc

General data

LED status display per channel	red	Disconnection per channel	No
Type of test point	No	Contact	No
Fuse per channel	1 A	LED status of the supply voltage	green
Power supply fuse	6.3 A		

Connection data

Number of poles (control side)	40-pole plug	Connection supply	LP 5.08mm
Connection (field side)	LP3R 5.08mm	Connection on control side	2 x KS (40P)

Ratings data

Operating voltage	24 V DC	Max. current for common pole	1 A
Max. current per channel	1 A		

Insulation coordination (EN50178)

Rated insulation voltage	< 50 V AC	Surge voltage category	III
Pollution severity level	2	Pulse voltage test (1,2/50µs)	0.8 kV
Insulation test voltage AC	0.35 kV		

Connection field

Min. wire cross-section, AWG	AWG 26	Type of connection	Screw connection
Sleeve with plastic collar, max.	2.5 mm ²	Flexible with sleeve, min.	0.5 mm ²
Flexible with sleeve, max.	2.5 mm ²	Flexible, max. H05(07) V-K	4 mm ²
Flexible, min. H05(07) V-K	0.5 mm ²	Solid, max. H05(07) V-U	6 mm ²
Solid, min. H05(07) V-U	0.5 mm ²	Stripping length	6 mm
Tightening torque, max.	0.6 Nm	Tightening torque, min.	0.5 Nm

TBY-SAI143-F-L-PS-2KS-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Clamping range, max.	6 mm ²	Clamping range, min.	0.13 mm ²
Max. wire cross-section, AWG	AWG 12		

Supply connection

Type of connection	Screw connection	Clamping range, min.	0.13 mm ²
Clamping range, max.	6 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Solid, max. H05(07) V-U	6 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible with sleeve, max.	2.5 mm ²
Flexible with sleeve, min.	2.5 mm ²	Ferrule with plastic collar, max.	0.5 mm ²
Wire cross-section, min. AWG	AWG 12	Wire cross-section, max. AWG	AWG 26
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.6 Nm
Stripping length	6 mm		

Classifications

ETIM 8.0	EC002780	ETIM 9.0	EC002780
ETIM 10.0	EC002780	ECLASS 14.0	27-14-11-52
ECLASS 15.0	27-14-11-52		