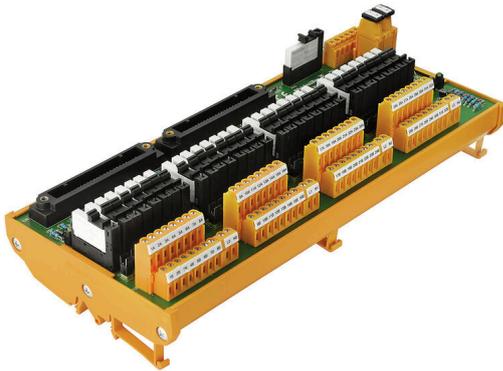


**TBY-ADV551-CF-PS-2KB-Z**
**Weidmüller Interface GmbH & Co. KG**

 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)


Similar to illustration

The digital output interfaces via relay are used to isolate the field sensors from the card and/or to adapt the operation of the said elements to the voltage required by the DCS. The interfaces also support additional characteristics that provide many benefits such as:

- Redundancy: the interfaces have 2 50-pole (AKB) connectors for redundancy purposes.
- Many of the interfaces activate a relay to indicate if one of the two possible power sources has dropped below a value of approximately 12 V
- The cards can be mounted via tension clamp or screw connection.
- The input sensors can be connected in two ways: supplied with power directly from the card or directly from the field.

**General ordering data**

|                 |   |
|-----------------|---|
| Version         | Interface, RS, 2 x AKB (50P), LM2NZF 5.08mm             |
| Order No.       | <a href="#">1379510000</a>                              |
| Type            | TBY-ADV551-CF-PS-2KB-Z                                  |
| GTIN (EAN)      | 4050118207163   |
| Qty.            | 1 items   |
| Delivery status | This article will no longer be available in the future. |
| Available until | 2026-02-10T00:00:00+01:00                               |

**TBY-ADV551-CF-PS-2KB-Z**
**Weidmüller Interface GmbH & Co. KG**

 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)
**Technical data**
**Approvals**

Approvals



ROHS Conform

**Dimensions and weights**

|            |          |                 |              |
|------------|----------|-----------------|--------------|
| Depth      | 80 mm    | Depth (inches)  | 3.1496 inch  |
| Height     | 131 mm   | Height (inches) | 5.1575 inch  |
| Width      | 303 mm   | Width (inches)  | 11.9291 inch |
| Net weight | 802.72 g |                 |              |

**Temperatures**

|                     |             |                       |             |
|---------------------|-------------|-----------------------|-------------|
| Storage temperature | -40...85 °C | Operating temperature | -25...70 °C |
|---------------------|-------------|-----------------------|-------------|

**Environmental Product Compliance**

|                                      |                                      |
|--------------------------------------|--------------------------------------|
| RoHS Compliance Status               | Compliant with exemption             |
| RoHS Exemption (if applicable/known) | 6c, 7a, 7cl                          |
| REACH SVHC                           | Lead 7439-92-1                       |
| SCIP                                 | 4c2bf777-1c3a-4574-9dcf-a43fbd923cdb |

**General data**

|                                  |       |                        |     |
|----------------------------------|-------|------------------------|-----|
| LED status display per relay     | green | Disconnecter per relay | No  |
| Fuse per relay                   | No    | Contactor              | No  |
| LED status of the supply voltage | green | Power supply fuse      | 1 A |

**Connection data**

|                                |               |                            |               |
|--------------------------------|---------------|----------------------------|---------------|
| Number of poles (control side) | 50-pole plug  | Connection supply          | LMNZF 5.08mm  |
| Connection (field side)        | LM2NZF 5.08mm | Connection on control side | 2 x AKB (50P) |

**Rating data**

|                         |                                      |
|-------------------------|--------------------------------------|
| Mechanical service life | 5 x 10 <sup>6</sup> switching cycles |
|-------------------------|--------------------------------------|

**Ratings data input**

|               |               |               |       |
|---------------|---------------|---------------|-------|
| Input voltage | 24 V DC ± 10% | Input current | 13 mA |
|---------------|---------------|---------------|-------|

**Ratings data output**

|                         |          |                            |            |
|-------------------------|----------|----------------------------|------------|
| Relay type              | RSS      | Material of contacts       | AgNi 90/10 |
| Rated voltage           | 250 V AC | Max. AC continuous current | 2.5 A      |
| Minimum contact current | 0.1 A    | Minimum contact voltage    | 5 V        |

**Insulation coordinates (EN50178)**

|                                   |           |                                    |           |
|-----------------------------------|-----------|------------------------------------|-----------|
| Rated insulation voltage          | ≤ 50 V DC | Rated input insulation voltage     | ≤ 50 V DC |
| Rated output insulation voltage   | 250 V AC  | Overvoltage category input/input   | II        |
| Overvoltage category input/output | III       | Overvoltage category output/output | II        |
| Pollution severity level          | 2         | Pulse voltage test (1,2/50µs)      | 6 kV      |

## TBY-ADV551-CF-PS-2KB-Z

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

|                            |          |                        |          |
|----------------------------|----------|------------------------|----------|
| Insulation test voltage AC | 1.2 kV   | Clearance input/output | ≥ 5.5 mm |
| Clearance input/input      | ≥ 5.5 mm |                        |          |

### Connection field

|                                  |                     |                            |                          |
|----------------------------------|---------------------|----------------------------|--------------------------|
| Min. wire cross-section, AWG     | AWG 24              | Type of connection         | Tension-clamp connection |
| Sleeve with plastic collar, max. | 1.5 mm <sup>2</sup> | Flexible with sleeve, min. | 0.25 mm <sup>2</sup>     |
| Flexible with sleeve, max.       | 1.5 mm <sup>2</sup> | Flexible, max. H05(07) V-K | 1.5 mm <sup>2</sup>      |
| Flexible, min. H05(07) V-K       | 0.2 mm <sup>2</sup> | Solid, max. H05(07) V-U    | 2.5 mm <sup>2</sup>      |
| Solid, min. H05(07) V-U          | 0.2 mm <sup>2</sup> | Stripping length           | 7.5 mm                   |
| Clamping range, max.             | 2.5 mm <sup>2</sup> | Clamping range, min.       | 0.13 mm <sup>2</sup>     |
| Max. wire cross-section, AWG     | AWG 14              |                            |                          |

### Supply connection

|                              |                          |                                   |                      |
|------------------------------|--------------------------|-----------------------------------|----------------------|
| Type of connection           | Tension-clamp connection | Clamping range, min.              | 0.13 mm <sup>2</sup> |
| Clamping range, max.         | 2.5 mm <sup>2</sup>      | Solid, min. H05(07) V-U           | 0.2 mm <sup>2</sup>  |
| Solid, max. H05(07) V-U      | 2.5 mm <sup>2</sup>      | Flexible, min. H05(07) V-K        | 0.2 mm <sup>2</sup>  |
| Flexible, max. H05(07) V-K   | 1.5 mm <sup>2</sup>      | Flexible with sleeve, max.        | 1.5 mm <sup>2</sup>  |
| Flexible with sleeve, min.   | 0.25 mm <sup>2</sup>     | Ferrule with plastic collar, max. | 1.5 mm <sup>2</sup>  |
| Wire cross-section, min. AWG | AWG 14                   | Wire cross-section, max. AWG      | AWG 24               |
| Stripping length             | 7.5 mm                   |                                   |                      |

### Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 8.0    | EC002780    | ETIM 9.0    | EC002780    |
| ETIM 10.0   | EC002780    | ECLASS 14.0 | 27-14-11-52 |
| ECLASS 15.0 | 27-14-11-52 |             |             |

