

ACT20M-RTCI-CO-OLP-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Product image



ACT20M: The slim solution

- Safe and space-saving (6 mm) isolation and conversion
- Quick installation of the power supply unit using the CH20M mounting rail bus
- Easy configuration via DIP switch or FDT/DTM software
- Extensive approvals such as ATEX, IECEx, GL, DNV
- High interference resistance

General ordering data

Version	Passive isolator, With galvanic isolation, Output current loop powered, Input : Temperature, PT100, thermocouple, Output : 4-20 mA
Order No.	1435590000
Type	ACT20M-RTCI-CO-OLP-S
GTIN (EAN)	4050118240641
Qty.	1 items

ACT20M-RTCI-CO-OLP-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E337701

Dimensions and weights

Depth	114.3 mm	Depth (inches)	4.5 inch
Height	112.5 mm	Height (inches)	4.4291 inch
Width	6.1 mm	Width (inches)	0.2402 inch
Net weight	80 g		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-25 °C...70 °C
Humidity at operating temperature	0...95 % (no condensation)	Humidity	40 °C / 93 % rel. humidity, no condensation

Probability of failure

MTBF	207 a
------	-------

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	7a, 7cl
REACH SVHC	Lead 7439-92-1
SCIP	2f6dd957-421a-46db-a0c2-cf1609156924

Input

Sensor	PT100 (2-/3-/4- wire), Thermocouples: J, K	Number inputs	1
Line resistance in measuring circuit	50 Ω @ RTD (Pt100), 10 kΩ @ TC (J, K)	Temperature input range	Configurable, PT100: -200...+850 °C, min. measurement range 10°C (RTD), J: (-100...+1200 °C), K: (-180...+1372 °C), min. measurement range 50°C (TC)
Input measurement range	PT100 -200...+850 °C, Thermocouple type J -100...+1200°C, Thermocouple type K -180...+1372°C	Influence of the sensor cable resistance	<0.002 Ω/Ω

Output

Number of outputs	1	Load impedance current	≤ 600 Ω
Wire break detection	Yes, Configurable, 3.5 mA / 23 mA / none	Type	passive, connected control must be active
Output current	configurable, 4...20 mA, 20...4 mA	Supply voltage (output)	16,8 V...31,2 V

ACT20M-RTCI-CO-OLP-S

Weidmüller Interface GmbH & Co. KG

 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

General data

Accuracy	absolute accuracy: $\leq \pm 0.05\%$ of the measurement range, RTD (PT100) Basic accuracy: $\leq \pm 0.1\text{ °C}$ of the measurement range, TC (J,K) Basic accuracy: $\leq \pm 0.5\text{ °C}$ of the measurement range	
Protection degree	IP20	
Supply voltage	Output loop powered, 6...35 V	
Cold-junction compensation error	$\pm(2.0\text{ °C} + 0.4\text{ °C} \times \Delta t)$ Δt = inside temperature - ambient temperature	
Step response time	Configurable, $\leq 30\text{ ms}$, $< 300\text{ ms}$	
Mounting rail	TS 35	
Temperature coefficient	RTD (PT100) $\leq 0.01\%$ of the measurement range/°C or $0.02\text{ °C}/\text{°C}$, TC (J,K) $0.1\text{ °C}/\text{°C}$	
Delivery state	Setting parameters	Output
	Configuration	4...20 mA (loop)
	Setting parameters	Sensor error detection
	Configuration	enabled
	Setting parameters	Output error level
	Configuration	downscale
	Setting parameters	Noise suppression
	Configuration	50 Hz
	Setting parameters	Step response time
	Configuration	$< 30\text{ ms}$
	Setting parameters	Start temperature
	Configuration	-200 °C
	Setting parameters	End temperature
	Configuration	0 °C
Nominal power consumption	0.5 VA	
Configuration	DIP switch	
Power consumption, max.	0.8 W	
Power consumption, typ.	0.5 W	
Delivery state	Output: 4...20 mA (loop) // Sensor error detection: enabled // Output error level: downscale // Noise suppression: 50 Hz // Step response time: $< 30\text{ ms}$ // Start temperature: -200 °C // End temperature: 0 °C	

Insulation coordination

EMC standards	IEC 61326-1	Surge voltage category	II
Pollution severity	2	Galvanic isolation	2-way isolator
Insulation voltage	2.5 kVeff / 1 min.	Rated voltage	300 Veff

Data for Ex applications (ATEX)

Marking	II 3 G Ex nA IIC T4 Gc	IECEx - gas labelling	Ex nA IIC T4 Gc, Standard: IEC 60079-0-15
Installation location	Device installed in safe area, zone 2		

Connection data

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 30	Wire connection cross section AWG, max.	AWG 14

EMC conformity and approvals

EMC standards	IEC 61326-1	Standards	IEC 61010-1
---------------	-------------	-----------	-------------

ACT20M-RTCI-CO-OLP-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data**Part description**

Product description The ACT20M-RTCI-CO-OLP-S passive configurable temperature transducer isolates and converts analogue signals. An analogue RTD (Type Pt100) or TC (Type J, K) input signal is linearly converted into an analogue output signal and galvanically isolated. Power is supplied through the output measurement circuit (output- loop powered).

Classifications

ETIM 8.0	EC002919	ETIM 9.0	EC002919
ETIM 10.0	EC002919	ECLASS 14.0	27-21-01-29
ECLASS 15.0	27-21-01-29		


ACT20M-RTCI-CO-OLP-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

Drawings

www.weidmueller.com

Connection diagram

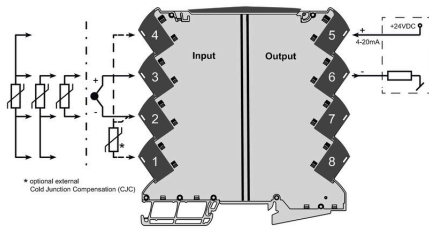


Dimensional drawing



DIP switch setting

RTD & TC element type	PT100, 2-wire, 500 Ω				PT100, 3-wire, 500 Ω				PT100, 4-wire, 500 Ω				K (external CJC)				K (external CJC)				K (external CJC)			
	Min.	S2	Max.	S2	Min.	S2	Max.	S2	Min.	S2	Max.	S2	Min.	S2	Max.	S2	Min.	S2	Max.	S2	Min.	S2	Max.	S2
None	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Output	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Sensor error detection	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Output error level	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Noise suppression	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Response time	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

example for DIP switch setting
 (with ACT20M tool software)

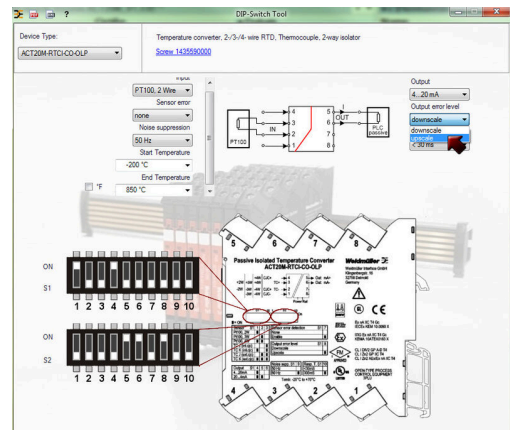

example for DIP switch setting
 (with ACT20M tool software)

