

## SF 3/12 MC NE GN V2


**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

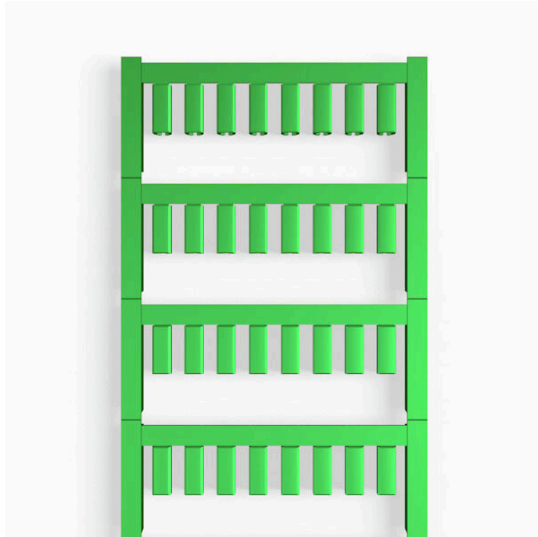

SlimFix are conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. They consist of halogen-free material and comply with flammability rating V0/V2. SlimFix is an acknowledged and accredited marker type for traffic engineering applications. The SF tool allows easy installation, even in case of small markers.

#### Advantages:

- Halogen-free material
- Flammability rating V0/V2
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm<sup>2</sup>
- Markers in proven MultiCard format

#### General ordering data

|            |  |
|------------|--|
| Version    | SlimFix, Conductor and cable markers, 3 - 3.7 mm, 12 x 4.6 mm, green |
| Order No.  | <a href="#">1444310000</a>   |
| Type       | SF 3/12 MC NE GN V2  |
| GTIN (EAN) | 4050118249637  |
| Qty.       | 320 items  |

## SF 3/12 MC NE GN V2

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

### Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

### Dimensions and weights

|            |        |                 |             |
|------------|--------|-----------------|-------------|
| Depth      | 4.8 mm | Depth (inches)  | 0.189 inch  |
| Height     | 12 mm  | Height (inches) | 0.4724 inch |
| Width      | 4.6 mm | Width (inches)  | 0.1811 inch |
| Net weight | 0.32 g |                 |             |

### Temperatures

|                             |              |
|-----------------------------|--------------|
| Operating temperature range | -40...100 °C |
|-----------------------------|--------------|

### Environmental Product Compliance

|                          |                             |                  |  |
|--------------------------|-----------------------------|------------------|--|
| RoHS Compliance Status   | Compliant without exemption |                  |  |
| REACH SVHC               | No SVHC above 0.1 wt%       |                  |  |
| Product Carbon Footprint | Cradle to gate              | 0.002 kg CO2 eq. |  |

### General data

|                                      |   |           |  |
|--------------------------------------|---|-----------|--|
| Type of printing                     | neutral   |           |  |
| Width                                | 4.6 mm  |           |  |
| UL 94 flammability rating            | V-2   |           |  |
| Operating temperature range, max.    | 100 °C  |           |  |
| Operating temperature range, min.    | -40 °C  |           |  |
| Colour                               | green   |           |  |
| Halogen                              | No  |           |  |
| Basic material                       | Polyamide 66  |           |  |
| Number of markers per packaging unit | Form of supply  | MultiCard |  |
| Size of labelling field              | 12 x 4.6 mm   |           |  |
| Recommended industries               | Transportation, Machinery   |           |  |
| compatible printer                   | <a href="#">PRINTJET CONNECT</a> , <a href="#">MCP BASIC 2</a> , <a href="#">MCP PLUS 2</a> |           |  |
| Number of markers per combination    | 1 MultiCard = Conductor and cable markers   |           |  |
| Operating temperature range          | -40...100 °C  |           |  |

### Conductor and cable markers

|                                  |                           |                               |                     |
|----------------------------------|---------------------------|-------------------------------|---------------------|
| Halogen                          | No                        | Conductor cross-section, max. | 2.5 mm <sup>2</sup> |
| Conductor cross-section, min.    | 1.5 mm <sup>2</sup>       | Conductor O.D., max.          | 3.7 mm              |
| Conductor O.D., min.             | 3 mm                      | Conductor O.D.                | 3 - 3.7 mm          |
| Cross-section for connected wire | 1.5 - 2.5 mm <sup>2</sup> |                               |                     |

### Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 8.0    | EC001530    | ETIM 9.0    | EC001530    |
| ETIM 10.0   | EC001530    | ECLASS 14.0 | 27-28-11-02 |
| ECLASS 15.0 | 27-28-11-02 |             |             |

**Drawings**

