

IE-FCI-PWB-GB**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



FrontCom® Vario integrates multiple functions in only one single frame. The system is easy to install and you can select from a wide range of data, signal and power modules. In addition to being extremely compact, Front-Com® Vario offers a number of unique product features that will make your project planning and work activities secure, fast and future-proof. Furthermore, the Front-Com® Vario system has an attractive housing design that, by the way, offers highest impact-resistance and fully meets the requirements of IP 65 protection class.

General ordering data

| | |
|------------|--|
| Version | FrontCom, Insert Power large, Type G, Socket connector, GB |
| Order No. | 1450770000 |
| Type | IE-FCI-PWB-GB |
| GTIN (EAN) | 4050118255577 |
| Qty. | 1 items |

Technical data

Approvals

Approvals



ROHS Conform

Dimensions and weights

Net weight 37 g

Temperatures

Storage temperature -10 °C...70 °C Operating temperature -5 °C...40 °C
Installation temperature

Environmental Product Compliance

RoHS Compliance Status Compliant with exemption
RoHS Exemption (if applicable/known) 6c
REACH SVHC Lead 7439-92-1
SCIP 14f36bdb-8bcd-4f24-8fb3-9538ad1abec6

General data

Protection degree IP20 Insert type Insert Power large
Connector face Type G Fire load 770 kJ

Clampable conductors

| | | |
|---|-----------------------------|---------------------|
| Stripping length | 9 mm | |
| Type of connection | Screw connection | |
| Conductor connection cross-section, extremely flexible with wire end ferrule | min. | 1.5 mm ² |
| | max. | 2.5 mm ² |
| Conductor connection cross-section, extremely flexible without wire end ferrule | min. | 1.5 mm ² |
| | max. | 4 mm ² |
| Conductor connection cross-section, rigid | min. | 1.5 mm ² |
| | max. | 4 mm ² |
| Conductor connection cross-section, flexible with wire end ferrule | min. | 1.5 mm ² |
| | max. | 2.5 mm ² |
| Conductor connection cross-section, flexible without wire end ferrule | 1.5 ... 4 mm ² | |
| Conductor connection cross-section, extremely flexible without wire end ferrule | 1.5 ... 4 mm ² | |
| Conductor connection cross-section, rigid | 1.5 ... 4 mm ² | |
| Conductor connection cross-section, flexible with wire end ferrule | 1.5 ... 2.5 mm ² | |
| Conductor connection cross-section, flexible without wire end ferrule | min. | 1.5 mm ² |
| | max. | 4 mm ² |
| Conductor connection cross-section, extremely flexible with wire end ferrule | 1.5 ... 2.5 mm ² | |

Technical data**Technical data**

| | | | |
|--------------------|-------|-----------------------|------------------|
| Rated voltage (AC) | 250 V | Housing main material | Polycarbonate PC |
| Nominal current | 13 A | | |

General standards


| | |
|-----------------------|------------|
| Certificate No. (DNV) | TAA000022B |
|-----------------------|------------|

Classifications


| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 8.0 | EC001121 | ETIM 9.0 | EC001121 |
| ETIM 10.0 | EC001121 | ECLASS 14.0 | 27-18-28-92 |
| ECLASS 15.0 | 27-18-28-92 | | |

Drawings

Dimensioned drawing

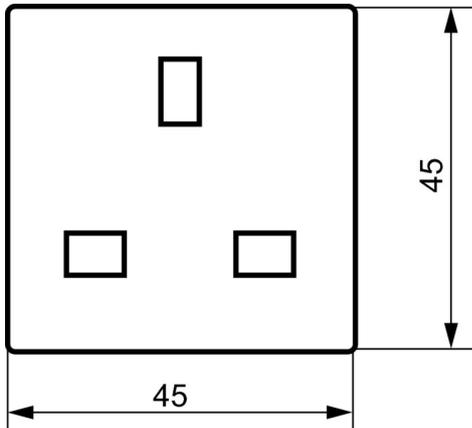

Dimensioned drawing

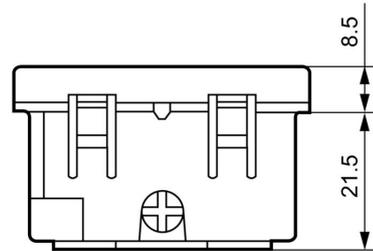

Accessories

Rail adaptor for socket inserts



At Weidmüller you can get everything you need from one source - including accessories for Industrial Ethernet.

The benefits for you:

- tools
- testing instruments
- cable bushings
- cabinet connections
- markers
- dust protection
- power packs
- overvoltage protection

General ordering data

| | | | |
|------------|----------------------------|---------|--|
| Type | IE-DINRAIL-AD-PWB | Version | |
| Order No. | 2534680000 | | |
| GTIN (EAN) | 4050118546354 | | |
| Qty. | 1 ST | | |