

KLIPPON CS STB 2.1-2**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

On-site control with Ex-certified Klippon® Control Station:
small command and signalling devices.

Approved operating and display elements in stainless
steel, aluminium or polyester enclosures.

You want to control and safeguard your work processes
in hazardous areas. For on-site control - approved Klip-
pon® enclosure solutions with control and display ele-
ments.

General ordering data

Version	Klippon Control Station (control and signalling device), Control / signalling device, KLIPPON STB 2.1 SS Stainless steel 1.4404 (316L), Light module - red, EMERGENCY-STOP pushbutton with yellow, contrasting label, 2 NC contact, positive opening contacts, -55 °C...55 °C, IP54, IP66
Order No.	1537320000
Type	KLIPPON CS STB 2.1-2
GTIN (EAN)	4050118341652
Qty.	1 items
Delivery status	Discontinued
Available until	2024-08-31T00:00:00+02:00

Creation date 07.03.2026 06:11:43 MEZ

Catalogue status / Drawings

KLIPPON CS STB 2.1-2

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

Approvals



Dimensions and weights

Depth	81.5 mm	Depth (inches)	3.2087 inch
Depth with add-on components	119 mm	Height	190 mm
Height (inches)	7.4803 inch	Width	150 mm
Width (inches)	5.9055 inch	Mounting dimension - width	145 mm
Net weight	2190 g		

Temperatures

Ambient temperature	-55 °C...55 °C	Operating temperature	
---------------------	----------------	-----------------------	--

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c
REACH SVHC	Lead 7439-92-1
SCIP	c0b142f1-4049-4b95-bbc3-9959a2d3b09c

Certificate numbers enclosure

Certificate no. Terminal Box (ATEX)	TÜV 14 ATEX 7606 X	Certificate no. Terminal Box (INMETRO)	LMP 21.0019X
Certificate no. Terminal Box (IECEx)	IECEx ITA 14.0013X	Certificate No. (IECEx)	IECExITA14.0013X
Certificate No. (ATEX)	TUEV14ATEX7606X		

General information

1 Position in enclosure	Light module - red	2 Position in enclosure	EMERGENCY-STOP pushbutton with yellow, contrasting label
Contact design	2 NC contact, positive opening contacts	Operating voltage, max.	250 V
Operating current at 40°C ambient temperature, max.	1.5 mm ² - T6 10 A, 1.5 mm ² - T5 16 A, 2.5 mm ² - T6 16 A	Operating current at 55°C ambient temperature, max.	1.5 mm ² - T4 16 A, 1.5 mm ² - T5 10 A, 2.5 mm ² - T5 16 A
Actuators	EMERGENCY STOP pushbutton	Actuator colour	red
Drill holes side B	1 x M25	Lid attachment	M5 hexagonal screw with slot and 10mm distance across flats
Seal material of operating and display elements	EPDM	Enclosure seal material	Silicone (VMQ)
Torque for lid screws	2.5 Nm	Earth stud torque	7.5 Nm
External earth	M6 earthing studs, stainless steel	Internal earth	M6 x 10 earthing studs integrated in the lid, stainless steel
Cable gland	VG M25 EXE MS	Marking	II 2 G Ex d e IIC T ⁺ Gb, II 2 D Ex tb IIC T ⁺ °C Db
Cable gland clamping area, max.	18 mm	Cable gland clamping area, min.	10 mm
Wire connection cross section, finely stranded, max.	2.5 mm ²	Type of mounting	Wall mounting
Surface finish	Mirror polished	Reference product	KLIPPON STB 2.1 SS

KLIPPON CS STB 2.1-2

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Impact resistance	4 joules in acc. with IEC60079-0	Temperature class	T4, T5, T6
Basic material	Stainless steel 1.4404 (316L)		

Material data

Surface finish	Mirror polished	Basic material	Stainless steel 1.4404 (316L)
----------------	-----------------	----------------	-------------------------------

General data

Colour	Natural	Protection degree	IP54, IP66
Colour chart (similar)	Not specified		

Housing

Basic material	Stainless steel 1.4404 (316L)	Drill holes side B	1 x M25
----------------	-------------------------------	--------------------	---------

Standard features

Version	Ex-approved housing solutions with control and display elements	Reference product	KLIPPON STB 2.1 SS
---------	---	-------------------	------------------------------------

Classifications


ETIM 8.0	EC002503	ETIM 9.0	EC002503
ETIM 10.0	EC002503	ECLASS 14.0	27-18-05-02
ECLASS 15.0	27-18-05-02		

KLIPPON CS STB 2.1-2

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

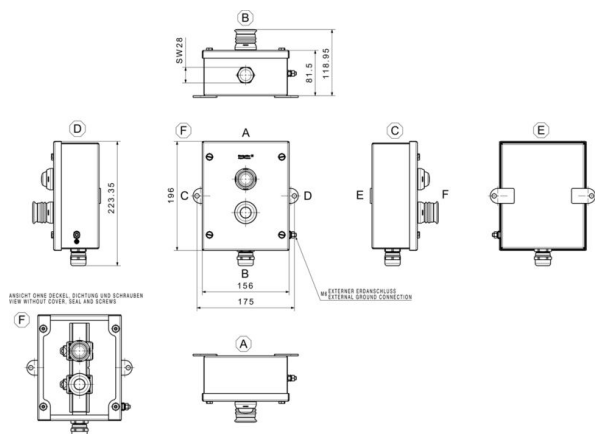

Klippon CS POK 122209 - 4 - LrBmPrLgBmPg	
Actuating and illuminating elements	
B: Button	
I: Illuminated button	
L: Lamp	
o: NO	
m: NC and NO	
e: NC	
g: Green	
r: Red	
e: Emergency Stop	
p: Push	
k: Key	
3: Positions of the switch	
Drilling design	
Dimensions	
Enclosure Range	
POK (Polyester)	
K (Aluminium)	
STB (Stainless Steel)	
Product Name	
Control Station	
Brand Name	
Klippon®	