

A4C 1.5

Weidmüller Interface GmbH & Co. KG


Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

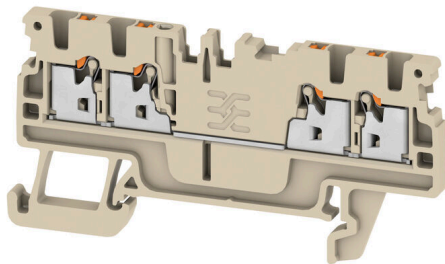

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

General ordering data

| | |
|------------|---|
| Version | Feed-through terminal, PUSH IN, 1.5 mm ² , 500 V, 17.5 A, dark beige |
| Order No. | 1552690000 |
| Type | A4C 1.5 |
| GTIN (EAN) | 4050118359831 |
| Qty. | 100 items |

A4C 1.5

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



| | |
|---------------------------|----------------------------|
| ROHS | Conform |
| UL File Number Search | UL Website |
| Certificate No. (cURus) | E60693 |
| Certificate No. (cURusEX) | E184763 |

Dimensions and weights

| | | | |
|--------------------------|-------------|----------------|-------------|
| Depth | 33.5 mm | Depth (inches) | 1.3189 inch |
| Depth including DIN rail | 34 mm | Height | 67.5 mm |
| Height (inches) | 2.6575 inch | Width | 3.5 mm |
| Width (inches) | 0.1378 inch | Net weight | 5.57 g |

Temperatures

| | | | |
|----------------------------------|----------------|----------------------------------|---------------|
| Storage temperature | -25 °C...55 °C | Ambient temperature | -5 °C...40 °C |
| Continuous operating temp., min. | -60 °C | Continuous operating temp., max. | 130 °C |

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC | No SVHC above 0.1 wt% |

Material data

| | | | |
|--------------------------------|--------|---------------------------|------------|
| Basic material | Wemid | Colour | dark beige |
| Colour of operational elements | orange | UL 94 flammability rating | V-0 |

Rating data IECEX/ATEX

| | | | |
|--------------------------------|---------------------|---------------------------------|---------------------|
| Certificate No. (ATEX) | TUEV16ATEX7909U | Certificate No. (IECEX) | IECEXTUR16.0036U |
| Max. voltage (ATEX) | 440 V | Current (ATEX) | 15 A |
| Wire cross section max. (ATEX) | 1.5 mm ² | Max. voltage (IECEX) | 440 V |
| Current (IECEX) | 15 A | Wire cross section max. (IECEX) | 1.5 mm ² |
| Marking EN 60079-7 | Ex eb II C Gb | Ex 2014/34/EU label | II 2 G D |

System specifications

| | | | |
|-------------------------------|-----|-------------------------------------|-------|
| End cover plate required | Yes | Number of potentials | 1 |
| Number of levels | 1 | Number of clamping points per level | 4 |
| Number of potentials per tier | 1 | Levels cross-connected internally | No |
| PE connection | No | Mounting rail | TS 35 |
| N-function | No | PE function | No |
| PEN function | No | | |

A4C 1.5

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Additional technical data

| | | | |
|---------------------|-------|--------------------------|---------|
| With snap-in pegs | No | Open sides | right |
| Snap-on | No | Type of fixing | Snap-on |
| Installation advice | Rail | Explosion-tested version | Yes |
| Type of mounting | TS 35 | | |

CSA rating data

| | | | |
|-------------------------------|--------|-----------------------|-----------------|
| Wire cross section max. (CSA) | 14 AWG | Voltage size C (CSA) | 300 V |
| Current size C (CSA) | 13 A | Certificate No. (CSA) | 200039-70089609 |
| Voltage size B (CSA) | 300 V | Current size B (CSA) | 13 A |
| Voltage size D (CSA) | 600 V | Current size D (CSA) | 5 A |
| Wire cross section min. (CSA) | 26 AWG | | |

Conductors for clamping (additional connection)

Connection type, additional connection PUSH IN

Conductors for clamping (rated connection)

| | | | |
|---|----------------------|------|------|
| Gauge to IEC 60947-1 | A1 | | |
| Wire connection cross section AWG, max. | AWG 14 | | |
| Connection direction | top | | |
| Stripping length | 8 mm | | |
| Type of connection | PUSH IN | | |
| Number of connections | 4 | | |
| Clamping range, max. | 1.5 mm ² | | |
| Clamping range, min. | 0.14 mm ² | | |
| Blade size | 0.4 x 2.0 mm | | |
| Wire connection cross section AWG, min. | AWG 26 | | |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 1 mm ² | | |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.14 mm ² | | |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 1.5 mm ² | | |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.14 mm ² | | |
| Wire connection cross section, finely stranded, max. | 1.5 mm ² | | |
| Wire connection cross section, finely stranded, min. | 0.14 mm ² | | |
| Connection cross-section, stranded, max. | 1.5 mm ² | | |
| Connection cross-section, stranded, min. | 0.14 mm ² | | |
| Wire connection cross-section, solid core, max. | 1.5 mm ² | | |
| Wire connection cross-section, solid core, min. | 0.14 mm ² | | |
| Connection cross-section, finely stranded, min. | 0.14 mm ² | | |
| Tube length for wire-end ferrule with plastic collar DIN 46228/4 | Tube length | min. | 6 mm |
| | | max. | 8 mm |

A4C 1.5

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

| | | | |
|---|--|----------------------|----------------------|
| Tube length for wire-end ferrule without plastic collar DIN 46228/1 | Cross-section for conductor connection | min. | 0.14 mm ² |
| | | max. | 0.75 mm ² |
| | Tube length | min. | 5 mm |
| | Cross-section for conductor connection | nominal | 0.25 mm ² |
| | Tube length | nominal | 6 mm |
| | Cross-section for conductor connection | min. | 0.5 mm ² |
| Tube length for wire-end ferrule with plastic collar acc. to cross-section | | max. | 1 mm ² |
| | Tube length | nominal | 10 mm |
| | Cross-section for conductor connection | nominal | 1.5 mm ² |
| | Cross-section, min. | 0.14 mm ² | |
| | Cross-section, max. | 0.75 mm ² | |
| | Tube length, min. | 6 mm | |
| Tube length for wire-end ferrule without plastic collar acc. to cross-section | Tube length, max. | 8 mm | |
| | Cross-section, min. | 0.25 mm ² | |
| | Cross-section, max. | 0.25 mm ² | |
| | Tube length, min. | 5 mm | |
| | Tube length, max. | 5 mm | |
| | Cross-section, min. | 0.5 mm ² | |
| | Cross-section, max. | 1 mm ² | |
| | Tube length, min. | 6 mm | |
| | Tube length, max. | 6 mm | |
| | Cross-section, min. | 1.5 mm ² | |
| | Cross-section, max. | 1.5 mm ² | |
| | Tube length, min. | 10 mm | |
| Tube length, max. | 10 mm | | |

General

| | | | |
|---|--------|---------------------|---------------|
| Wire connection cross section AWG, max. | AWG 14 | Installation advice | Rail |
| Wire connection cross section AWG, min. | AWG 26 | Standards | IEC 60947-7-1 |
| Mounting rail | TS 35 | | |

Rating data

| | | | |
|--|---------------------|---------------------------------|---------------|
| Rated cross-section | 1.5 mm ² | Rated voltage | 500 V |
| Rated DC voltage | 500 V | Nominal current | 17.5 A |
| Current at maximum wires | 17.5 A | Standards | IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 1.83 mΩ | Rated impulse withstand voltage | 6 kV |
| Power loss in accordance with IEC 60947-7-x | 0.56 W | Surge voltage category | III |
| Pollution severity | 3 | | |

UL rating data

| | | | |
|---|--------|--|--------|
| Conductor size Factory wiring max. (cURus) | 14 AWG | Voltage size B (cURus) | 300 V |
| Voltage size D (cURus) | 600 V | Certificate No. (cURus) | E60693 |
| Conductor size Field wiring min. (cURus) 26 AWG | | Conductor size Factory wiring min. (cURus) | 26 AWG |
| Current size B (cURus) | 13 A | Voltage size C (cURus) | 300 V |
| Current size C (cURus) | 13 A | Current size D (cURus) | 5 A |
| Conductor size Field wiring max. (cURus) 14 AWG | | | |

Important note

Product information For the wire end ferrules H1/10 and H1.5/10 a stripping length of 10 mm is to apply.

Technical data

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 8.0 | EC000897 | ETIM 9.0 | EC000897 |
| ETIM 10.0 | EC000897 | ECLASS 14.0 | 27-25-01-01 |
| ECLASS 15.0 | 27-25-01-01 | | |

Drawings

