

WPD 202 4X35/4X25 BL**Weidmüller Interface GmbH & Co. KG**Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Product image**Building installation wiring**

For building installations, we offer a complete system that revolves around the 10×3 copper rail and comprises perfectly coordinated components: from installation terminal blocks, neutral conductor terminal blocks and distribution terminal blocks to comprehensive accessories such as busbars and busbar holders.

General ordering data

Version	Potential distributor terminal, Screw connection, blue, 35 mm ² , 202 A, 1000 V, Number of connections: 8, Number of levels: 1
Order No.	1561700000
Type	WPD 202 4X35/4X25 BL
GTIN (EAN)	4050118366761
Qty.	2 items

WPD 202 4X35/4X25 BL

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS Conform

Dimensions and weights

Depth	49.3 mm	Depth (inches)	1.9409 inch
Height	55.4 mm	Height (inches)	2.1811 inch
Width	44.4 mm	Width (inches)	1.748 inch
Net weight	184 g		

Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-5 °C...40 °C
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	130 °C

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c
REACH SVHC	Lead 7439-92-1
SCIP	9b5f0838-1f0b-4c14-9fc7-3f5e6ee75be2

Material data

Basic material	Wemid	Colour	blue
UL 94 flammability rating	V-0		

System specifications

Version	Screw connection	End cover plate required	No
Number of potentials	1	Number of levels	1
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	Yes	PE connection	No
Mounting rail	TS 35	N-function	Yes
PE function	No	PEN function	No

Additional technical data

With snap-in pegs	Yes	Open sides	closed
Snap-on	Yes	Installation advice	Terminal rail / mounting plate
Explosion-tested version	Yes	Type of mounting	Snap-on

Conductors for clamping (additional connection)

Connection type, additional connection Screw connection

Conductors for clamping (rated connection)

Wire connection cross section AWG, max.	AWG 4	Connection direction	on side
Type of connection 2	Screw connection	Type of connection	Screw connection

WPD 202 4X35/4X25 BL

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Number of connections	8	Clamping range, max.	35 mm ²
Clamping range, min.	2.5 mm ²	Wire connection cross section AWG, min.	AWG 14
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	2.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	25 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	2.5 mm ²	Wire connection cross section, finely stranded, max.	0 mm ²
Wire connection cross section, finely stranded, min.	2.5 mm ²	Connection cross-section, stranded, max.	35 mm ²
Connection cross-section, stranded, min. 2.5 mm ²		Wire connection cross-section, solid core, max.	35 mm ²
Wire connection cross-section, solid core, min.	2.5 mm ²		

General

Number of poles	8	Wire connection cross section AWG, max.	AWG 4
Installation advice	Terminal rail / mounting plate	Wire connection cross section AWG, min.	AWG 14
Standards	IEC 60947-7-1, IEC 61238-1, VDE 0603-2	Mounting rail	TS 35


Rating data

Rated cross-section	35 mm ²	Rated voltage	1000 V
Rated AC voltage	1000 V	Rated DC voltage	1000 V
Nominal current	202 A	Current at maximum wires	202 A
Standards	IEC 60947-7-1, IEC 61238-1, VDE 0603-2	Power loss in accordance with IEC 60947-7-x	1.90 mW

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ETIM 9.0	EC000897
ETIM 10.0	EC000897	ECLASS 9.0	27-14-11-20
ECLASS 9.1	27-14-11-20	ECLASS 10.0	27-14-11-20
ECLASS 11.0	27-14-11-20	ECLASS 12.0	27-14-11-20
ECLASS 13.0	27-25-01-19	ECLASS 14.0	27-25-01-19
ECLASS 15.0	27-25-01-19		

Drawings



Conductor connection data according to VDE 0603 (2) (Class: REC 4047-3) (Class A (Cu-Pb))									
Conductor (Pole/Line)			Conductor		Jumper (Line/Jumper-Off)			Conductor	
Bus bar	2.5 mm ²	2.5 mm ²	1.5 mm ²	1.5 mm ²	Bus bar	2.5 mm ²	2.5 mm ²	1.5 mm ²	1.5 mm ²
20 mm		8 mm	8 mm		20 mm		8 mm	8 mm	
15 mm		6 mm	6 mm		15 mm		6 mm	6 mm	
12 mm		4 mm	4 mm		12 mm		4 mm	4 mm	
10 mm		3 mm	3 mm		10 mm		3 mm	3 mm	
8 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm	8 mm	2.5 mm	2.5 mm	2.5 mm	2.5 mm
6 mm		2 mm	2 mm		6 mm		2 mm	2 mm	
4 mm		1.5 mm	1.5 mm		4 mm		1.5 mm	1.5 mm	
3 mm		1 mm	1 mm		3 mm		1 mm	1 mm	
2 mm		0.5 mm	0.5 mm		2 mm		0.5 mm	0.5 mm	
1.5 mm		0.5 mm	0.5 mm		1.5 mm		0.5 mm	0.5 mm	
1 mm		0.5 mm	0.5 mm		1 mm		0.5 mm	0.5 mm	
0.5 mm		0.5 mm	0.5 mm		0.5 mm		0.5 mm	0.5 mm	
0.25 mm		0.25 mm	0.25 mm		0.25 mm		0.25 mm	0.25 mm	
0.125 mm		0.125 mm	0.125 mm		0.125 mm		0.125 mm	0.125 mm	
0.0625 mm		0.0625 mm	0.0625 mm		0.0625 mm		0.0625 mm	0.0625 mm	
0.03125 mm		0.03125 mm	0.03125 mm		0.03125 mm		0.03125 mm	0.03125 mm	
0.015625 mm		0.015625 mm	0.015625 mm		0.015625 mm		0.015625 mm	0.015625 mm	
0.0078125 mm		0.0078125 mm	0.0078125 mm		0.0078125 mm		0.0078125 mm	0.0078125 mm	
0.00390625 mm		0.00390625 mm	0.00390625 mm		0.00390625 mm		0.00390625 mm	0.00390625 mm	
0.001953125 mm		0.001953125 mm	0.001953125 mm		0.001953125 mm		0.001953125 mm	0.001953125 mm	
0.0009765625 mm		0.0009765625 mm	0.0009765625 mm		0.0009765625 mm		0.0009765625 mm	0.0009765625 mm	
0.00048828125 mm		0.00048828125 mm	0.00048828125 mm		0.00048828125 mm		0.00048828125 mm	0.00048828125 mm	
0.000244140625 mm		0.000244140625 mm	0.000244140625 mm		0.000244140625 mm		0.000244140625 mm	0.000244140625 mm	
0.0001220703125 mm		0.0001220703125 mm	0.0001220703125 mm		0.0001220703125 mm		0.0001220703125 mm	0.0001220703125 mm	
0.00006103515625 mm		0.00006103515625 mm	0.00006103515625 mm		0.00006103515625 mm		0.00006103515625 mm	0.00006103515625 mm	
0.000030517578125 mm		0.000030517578125 mm	0.000030517578125 mm		0.000030517578125 mm		0.000030517578125 mm	0.000030517578125 mm	
0.0000152587890625 mm		0.0000152587890625 mm	0.0000152587890625 mm		0.0000152587890625 mm		0.0000152587890625 mm	0.0000152587890625 mm	
0.00000762939453125 mm		0.00000762939453125 mm	0.00000762939453125 mm		0.00000762939453125 mm		0.00000762939453125 mm	0.00000762939453125 mm	
0.000003814697265625 mm		0.000003814697265625 mm	0.000003814697265625 mm		0.000003814697265625 mm		0.000003814697265625 mm	0.000003814697265625 mm	
0.0000019073486328125 mm		0.0000019073486328125 mm	0.0000019073486328125 mm		0.0000019073486328125 mm		0.0000019073486328125 mm	0.0000019073486328125 mm	
0.00000095367431640625 mm		0.00000095367431640625 mm	0.00000095367431640625 mm		0.00000095367431640625 mm		0.00000095367431640625 mm	0.00000095367431640625 mm	
0.000000476837158203125 mm		0.000000476837158203125 mm	0.000000476837158203125 mm		0.000000476837158203125 mm		0.000000476837158203125 mm	0.000000476837158203125 mm	
0.0000002384185791015625 mm		0.0000002384185791015625 mm	0.0000002384185791015625 mm		0.0000002384185791015625 mm		0.0000002384185791015625 mm	0.0000002384185791015625 mm	
0.00000011920928955078125 mm		0.00000011920928955078125 mm	0.00000011920928955078125 mm		0.00000011920928955078125 mm		0.00000011920928955078125 mm	0.00000011920928955078125 mm	
0.000000059604644775390625 mm		0.000000059604644775390625 mm	0.000000059604644775390625 mm		0.000000059604644775390625 mm		0.000000059604644775390625 mm	0.000000059604644775390625 mm	
0.0000000298023223876953125 mm		0.0000000298023223876953125 mm	0.0000000298023223876953125 mm		0.0000000298023223876953125 mm		0.0000000298023223876953125 mm	0.0000000298023223876953125 mm	
0.00000001490116119384765625 mm		0.00000001490116119384765625 mm	0.00000001490116119384765625 mm		0.00000001490116119384765625 mm		0.00000001490116119384765625 mm	0.00000001490116119384765625 mm	
0.000000007450580596923828125 mm		0.000000007450580596923828125 mm	0.000000007450580596923828125 mm		0.000000007450580596923828125 mm		0.000000007450580596923828125 mm	0.000000007450580596923828125 mm	
0.0000000037252902984619140625 mm		0.0000000037252902984619140625 mm	0.0000000037252902984619140625 mm		0.0000000037252902984619140625 mm		0.0000000037252902984619140625 mm	0.0000000037252902984619140625 mm	
0.00000000186264514923095703125 mm		0.00000000186264514923095703125 mm	0.00000000186264514923095703125 mm		0.00000000186264514923095703125 mm		0.00000000186264514923095703125 mm	0.00000000186264514923095703125 mm	
0.000000000931322574615478515625 mm		0.000000000931322574615478515625 mm	0.000000000931322574615478515625 mm		0.000000000931322574615478515625 mm		0.000000000931322574615478515625 mm	0.000000000931322574615478515625 mm	
0.0000000004656612873077392578125 mm		0.0000000004656612873077392578125 mm	0.0000000004656612873077392578125 mm		0.0000000004656612873077392578125 mm		0.0000000004656612873077392578125 mm	0.0000000004656612873077392578125 mm	
0.00000000023283064365386962890625 mm		0.00000000023283064365386962890625 mm	0.00000000023283064365386962890625 mm		0.00000000023283064365386962890625 mm		0.00000000023283064365386962890625 mm	0.00000000023283064365386962890625 mm	
0.000000000116415321826934814453125 mm		0.000000000116415321826934814453125 mm	0.000000000116415321826934814453125 mm		0.000000000116415321826934814453125 mm		0.000000000116415321826934814453125 mm	0.000000000116415321826934814453125 mm	
0.0000000000582076609134674072265625 mm		0.0000000000582076609134674072265625 mm	0.0000000000582076609134674072265625 mm		0.0000000000582076609134674072265625 mm		0.0000000000582076609134674072265625 mm	0.0000000000582076609134674072265625 mm	
0.00000000002910383045673370361328125 mm		0.00000000002910383045673370361328125 mm	0.00000000002910383045673370361328125 mm		0.00000000002910383045673370361328125 mm		0.00000000002910383045673370361328125 mm	0.00000000002910383045673370361328125 mm	
0.000000000014551915228366851806640625 mm		0.000000000014551915228366851806640625 mm	0.000000000014551915228366851806640625 mm		0.000000000014551915228366851806640625 mm		0.000000000014551915228366851806640625 mm	0.000000000014551915228366851806640625 mm	
0.0000000000072759576141834259033203125 mm		0.0000000000072759576141834259033203125 mm	0.0000000000072759576141834259033203125 mm		0.0000000000072759576141834259033203125 mm		0.0000000000072759576141834259033203125 mm	0.0000000000072759576141834259033203125 mm	
0.00000000000363797880709171295166015625 mm		0.00000000000363797880709171295166015625 mm	0.00000000000363797880709171295166015625 mm		0.00000000000363797880709171295166015625 mm		0.00000000000363797880709171295166015625 mm	0.00000000000363797880709171295166015625 mm	
0.000000000001818989403545856475830078125 mm		0.000000000001818989403545856475830078125 mm	0.000000000001818989403545856475830078125 mm		0.000000000001818989403545856475830078125 mm		0.000000000001818989403545856475830078125 mm	0.000000000001818989403545856475830078125 mm	
0.0000000000009094947017729282379150390625 mm		0.0000000000009094947017729282379150390625 mm	0.0000000000009094947017729282379150390625 mm		0.0000000000009094947017729282379150390625 mm		0.0000000000009094947017729282379150390625 mm	0.0000000000009094947017729282379150390625 mm	
0.00000000000045474735088646411895751953125 mm		0.00000000000045474735088646411895751953125 mm	0.00000000000045474735088646411895751953125 mm		0.00000000000045474735088646411895751953125 mm		0.00000000000045474735088646411895751953125 mm	0.00000000000045474735088646411895751953125 mm	
0.000000000000227373675443232059478759765625 mm		0.000000000000227373675443232059478759765625 mm	0.000000000000227373675443232059478759765625 mm		0.000000000000227373675443232059478759765625 mm		0.000000000000227373675443232059478759765625 mm	0.000000000000227373675443232059478759765625 mm	
0.0000000000001136868377216160297393798828125 mm		0.0000000000001136868377216160297393798828125 mm	0.0000000000001136868377216160297393798828125 mm		0.0000000000001136868377216160297393798828125 mm		0.0000000000001136868377216160297393798828125 mm	0.0000000000001136868377216160297393798828125 mm	
0.00000000000005684341886080801486968994140625 mm		0.00000000000005684341886080801486968994140625 mm	0.00000000000005684341886080801486968994140625 mm		0.00000000000005684341886080801486968994140625 mm		0.00000000000005684341886080801486968994140625 mm	0.00000000000005684341886080801486968994140625 mm	
0.000000000000028421709430404007434844970703125 mm		0.000000000000028421709430404007434844970703125 mm	0.000000000000028421709430404007434844970703125 mm		0.000000000000028421709430404007434844970703125 mm		0.000000000000028421709430404007434844970703125 mm	0.000000000000028421709430404007434844970703125 mm	
0.0000000000000142108547152020037174224853515625 mm		0.0000000000000142108547152020037174224853515625 mm	0.0000000000000142108547152020037174224853515625 mm		0.0000000000000142108547152020037174224853515625 mm		0.0000000000000142108547152020037174224853515625 mm	0.0000000000000142108547152020037174224853515625 mm	
0.00000000000000710542735760100185871124267578125 mm		0.00000000000000710542735760100185871124267578125 mm	0.00000000000000710542735760100185871124267578125 mm		0.00000000000000710542735760100185871124267578125 mm		0.00000000000000710542735760100185871124267578125 mm	0.00000000000000710542735760100185871124267578125 mm	
0.000000000000003552713678800500929355621136953125 mm		0.000000000000003552713678800500929355621136953125 mm	0.000000000000003552713678800500929355621136953125 mm		0.000000000000003552713678800500929355621136953125 mm		0.000000000000003552713678800500929355621136953125 mm	0.000000000000003552713678800500929355621136953125 mm	
0.0000000000000017763568394002504646778105684765625 mm		0.0000000000000017763568394002504646778105684765625 mm	0.0000000000000017763568394002504646778105684765625 mm		0.0000000000000017763568394002504646778105684765625 mm		0.0000000000000017763568394002504646778105684765625 mm	0.0000000000000017763568394002504646778105684765625 mm	
0.00000000000000088817841970012523233890528423828125 mm		0.00000000000000088817841970012523233890528423828125 mm	0.00000000000000088817841970012523233890528423828125 mm		0.00000000000000088817841970012523233890528423828125 mm		0.00000000000000088817841970012523233890528423828125 mm	0.00000000000000088817841970012523233890528423828125 mm	
0.000000000000000444089209850062616169452642119140625 mm		0.000000000000000444089209850062616169452642119140625 mm	0.000000000000000444089209850062616169452642119140625 mm		0.000000000000000444089209850062616169452642119140625 mm		0.000000000000000444089209850062616169452642119140625 mm	0.00000000000000044408920	



Conductor connection data according to UL 1055 (Al-Cu)

Declaration no. (UR) **XCRZ.L00053**

Braid (Line)	Line		Lead	
	Copper	Aluminum	Copper	Aluminum
AWG 6	17 (30)	16 (28)	17 (30)	16 (28)
AWG 6		78.9 lb in		
AWG 8		53 lb in		53 lb in
AWG 8		53 lb in		35 lb in
AWG 10	31 lb in	31 lb in	22.1 lb in	22.1 lb in
AWG 12				
AWG 14				
AWG 16				
max current	126 A	116 A	80 A	65 A
Voltage max (UL) (V)	600V			

☐ Braid
 ☒ Solid
 ☐ Flexible with braid


CSA Rating data according to CSA 22.2 No. 158					
Certificate no. (dRHS)		XCPR2.00093			
Input Line	Copper	Aluminum	Copper	Aluminum	
	1.5 [30A]	1.5 [30A]	1.5 [30A]	1.5 [30A]	
AUG 6		8 kVA			
AUG 7		6 kVA			6 kVA
AUG 8	3.5 N/A	4 kVA	3.5 N/A		4 kVA
AUG 10	3.5 N/A			3.5 kVA	
AUG 12					
AUG 14					
AUG 16					
max. current	125 A	80 A	80 A	80 A	80 A
Voltage max. (L-C) (V)	600 V				
	[30A]	[30A]	[30A]	[30A]	[30A]
Standard	Solid	Flexible with braid			

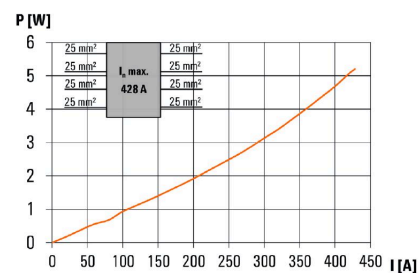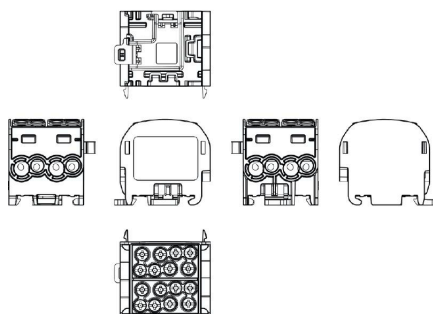

WPD 202 4X35/4X25 BL

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany


www.weidmueller.com

Accessories
Crosshead screwdriver Pozidriv


Crosshead screwdriver, Pozidriv, SDK PZ DIN 5262, ISO 8764/2-PZ, output to ISO 8764/1-PZ, ChromTop tip, SoftFinish grip

General ordering data

Type	SDK PZ2	Version
Order No.	9008540000	Screwdriver, Screwdriver
GTIN (EAN)	4032248056538	
Qty.	1 ST	

V2


SlimFix X are halogen-free conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. SlimFix is an acknowledged and approved marker type in traffic engineering. The SF tool allows easy installation even in case of small markers.

- Halogen-free material
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm²
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	SFX 9/24 MC NE WS V2	Version
Order No.	1852490000	SlimFix X, Conductor and cable markers, 7 - 40 mm, 24 x 15 mm,
GTIN (EAN)	4032248385461	white
Qty.	160 ST	

WPD 202 4X35/4X25 BL

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Blank



SlimFix X are halogen-free conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. SlimFix is an acknowledged and approved marker type in traffic engineering. The SF tool allows easy installation even in case of small markers.


- Halogen-free material
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm²
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	SFX 9/24 S MC NE WS	Version
Order No.	1323440000	SlimFix X, Conductor and cable markers, 7 - 40 mm, 24 x 13.62 mm,
GTIN (EAN)	4050118125894	white
Qty.	120 ST	

V2



SlimFix X are halogen-free conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. SlimFix is an acknowledged and approved marker type in traffic engineering. The SF tool allows easy installation even in case of small markers.

- Halogen-free material
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm²
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data


Type	SFX 10/23 MC NE WS V2	Version
Order No.	1852390000	SlimFix X, Conductor and cable markers, 7 - 40 mm, 23 x 11 mm,
GTIN (EAN)	4032248385362	white
Qty.	160 ST	
Type	SFX 14/23 MC NE WS V2	Version
Order No.	1852440000	SlimFix X, Conductor and cable markers, 7 - 40 mm, 23 x 14 mm,
GTIN (EAN)	4032248385416	white
Qty.	160 ST	

WPD 202 4X35/4X25 BL**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****Marker holder**

The marker holder offer the possibility of additional mounting of standard markers with a pitch of 5 or 5.1 mm. The angled holders can be optionally snapped together and could be mounted in all standard marking channels of the Klippon® Connect modular terminal blocks. Fitting marker types could be found under the respective accessories of the designation marking holder.

General ordering data

Type	BZT 1 WS 10/5	Version
Order No.	1805490000	Accessories, Marker holder
GTIN (EAN)	4032248270231	
Qty.	100 ST	
Type	BZT 1 ZA WS 10/5	Version
Order No.	1805520000	Accessories, Marker holder
GTIN (EAN)	4032248270248	
Qty.	100 ST	