

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com



Female plugs with spring connection (PUSH IN) as a plug-in connection level for decentralised I/O electronic components; used together with male headers in a 3.50-mm pitch.

### General ordering data

|              |  |
|--------------|--|
| Version      | PCB plug-in connector, female plug, 3.50 mm, Number of poles: 10, 180°, PUSH IN with actuator, Clamping range, max. : 1.5 mm², Box |
| Order No.    | <a href="#">1789090000</a>   |
| Type         | BL-I/O 3.50/10F PNP LED SN BK BX   |
| GTIN (EAN)   | 4032248208029  |
| Qty.         | 20 items   |
| Product data | IEC: 200 V / 2.2 A / 0.2 - 1.5 mm²<br>UL: 50 V / 5 A / AWG 24 - AWG 16   |
| Packaging    | Box  |

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

### Approvals

Approvals



|                       |                            |
|-----------------------|----------------------------|
| ROHS                  | Conform                    |
| UL File Number Search | <a href="#">UL Website</a> |
| Certificate No. (UR)  | E60693                     |

### Dimensions and weights

|            |         |                 |             |
|------------|---------|-----------------|-------------|
| Height     | 14.5 mm | Height (inches) | 0.5709 inch |
| Width      | 42 mm   | Width (inches)  | 1.6535 inch |
| Net weight | 11.92 g |                 |             |

### Environmental Product Compliance

|                                      |                          |
|--------------------------------------|--------------------------|
| RoHS Compliance Status               | Compliant with exemption |
| RoHS Exemption (if applicable/known) | 7cl                      |
| REACH SVHC                           | No SVHC above 0.1 wt%    |

### System Parameters

|  |                                     |                   |                             |
|--|-------------------------------------|-------------------|-----------------------------|
| Product family                               | OMNIMATE Signal - series BL/SL 3.50 |                   |                             |
| Type of connection                           | Field connection                    |                   |                             |
| Wire connection method                       | PUSH IN with actuator               |                   |                             |
| Pitch in mm (P)                              | 3.50 mm                             |                   |                             |
| Pitch in inches (P)                          | 0.138 "                             |                   |                             |
| Conductor outlet direction                   | 180°                                |                   |                             |
| Number of poles                              | 10                                  |                   |                             |
| L1 in mm                                     | 31.50 mm                            |                   |                             |
| L1 in inches                                 | 1.240 "                             |                   |                             |
| Number of rows                               | 1                                   |                   |                             |
| Pin series quantity                          | 2                                   |                   |                             |
| Rated cross-section                          | 1 mm <sup>2</sup>                   |                   |                             |
| Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch              |                   |                             |
| Touch-safe protection acc. to DIN VDE 0470   | IP20 plugged/ IP10 unplugged        |                   |                             |
| Volume resistance                            | ≤5 mΩ                               |                   |                             |
| Can be coded                                 | Yes                                 |                   |                             |
| Stripping length                             | 8 mm                                |                   |                             |
| Screwdriver blade                            | 0.4 x 2.5                           |                   |                             |
| Screwdriver blade standard                   | DIN 5264                            |                   |                             |
| Plugging cycles                              | 25                                  |                   |                             |
| Plugging force/pole, max.                    | 6 N                                 |                   |                             |
| Pulling force/pole, max.                     | 6 N                                 |                   |                             |
| Tightening torque                            | Torque type                         | Screw flange      |                             |
|  | Usage information                   | Tightening torque | min. 0.15 Nm<br>max. 0.2 Nm |

### Material data

|                                |                 |                        |          |
|--------------------------------|-----------------|------------------------|----------|
| Insulating material            | PBT             | Colour                 | black    |
| Colour of operational elements | grey, blue, red | Colour chart (similar) | RAL 9011 |

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

### Technical data

|                                       |          |                                       |          |
|---------------------------------------|----------|---------------------------------------|----------|
| Insulating material group             | IIIa     | Comparative Tracking Index (CTI)      | ≥ 200    |
| Moisture Level (MSL)                  |          | UL 94 flammability rating             | V-0      |
| Contact base material                 | Cu-alloy | Contact material                      | Cu-alloy |
| Contact surface                       | tinned   | Storage temperature, min.             | -40 °C   |
| Storage temperature, max.             | 70 °C    | Operating temperature, min.           | -50 °C   |
| Operating temperature, max.           | 75 °C    | Temperature range, installation, min. | -30 °C   |
| Temperature range, installation, max. | 75 °C    |                                       |          |

### Conductors suitable for connection

|  |                        |
|--|------------------------|
| Clamping range, min.   | 0.2 mm <sup>2</sup>    |
| Clamping range, max.   | 1.5 mm <sup>2</sup>    |
| Wire connection cross section AWG, min.                              | AWG 24                 |
| Wire connection cross section AWG, max.                              | AWG 16                 |
| Solid, min. H05(07) V-U  | 0.2 mm <sup>2</sup>    |
| Solid, max. H05(07) V-U  | 1.5 mm <sup>2</sup>    |
| Flexible, min. H05(07) V-K   | 0.2 mm <sup>2</sup>    |
| Flexible, max. H05(07) V-K   | 1.5 mm <sup>2</sup>    |
| w. plastic collar ferrule, DIN 46228 pt 4, 0.2 mm <sup>2</sup> min.  |                        |
| w. plastic collar ferrule, DIN 46228 pt 4, 0.75 mm <sup>2</sup> max. |                        |
| w. wire end ferrule, DIN 46228 pt 1, min.                            | 0.2 mm <sup>2</sup>    |
| w. wire end ferrule, DIN 46228 pt 1, max.                            | 1 mm <sup>2</sup>      |
| Plug gauge in accordance with EN 60999 a x b; ø                      | 2.4 mm x 1.5 mm; 1.9mm |

|  |  |                              |                               |
|--|--|------------------------------|-------------------------------|
| Clampable conductor                    | Cross-section for conductor connection | Type                         | fine-wired                    |
|  |  | nominal                      | 0.25 mm <sup>2</sup>          |
| wire end ferrule                       | wire end ferrule                       | Stripping length             | nominal 10 mm                 |
|  |  | Recommended wire-end ferrule | <a href="#">H0.25/12 HBL</a>  |
|  |  |                              |                               |
| Cross-section for conductor connection | wire end ferrule                       | Type                         | fine-wired                    |
|  |  | nominal                      | 0.34 mm <sup>2</sup>          |
| wire end ferrule                       | wire end ferrule                       | Stripping length             | nominal 10 mm                 |
|  |  | Recommended wire-end ferrule | <a href="#">H0.34/12 TK</a>   |
|  |  |                              |                               |
| Cross-section for conductor connection | wire end ferrule                       | Type                         | fine-wired                    |
|  |  | nominal                      | 0.5 mm <sup>2</sup>           |
| wire end ferrule                       | wire end ferrule                       | Stripping length             | nominal 10 mm                 |
|  |  | Recommended wire-end ferrule | <a href="#">H0.5/14 OR</a>    |
|  |  |                              |                               |
| Cross-section for conductor connection | wire end ferrule                       | Type                         | fine-wired                    |
|  |  | nominal                      | 0.75 mm <sup>2</sup>          |
| wire end ferrule                       | wire end ferrule                       | Stripping length             | nominal 10 mm                 |
|  |  | Recommended wire-end ferrule | <a href="#">H0.75/14T HBL</a> |
|  |  |                              |                               |

Reference text The outside diameter of the plastic collar should not be larger than the pitch (P). Length of ferrules is to be chosen depending on the product and the rated voltage.

### Rated data acc. to IEC

|   |                        |   |       |
|---|------------------------|---|-------|
| tested acc. to standard                       | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C) | 2.2 A |
| Rated current, max. number of poles (Tu=20°C) | 2 A                    | Rated current, min. number of poles (Tu=40°C) | 2.2 A |

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

### Technical data

|   |        |   |                   |
|---|--------|---|-------------------|
| Rated current, max. number of poles (Tu=40°C)                             | 2 A    | Rated voltage for surge voltage class / pollution degree II/2         | 200 V             |
| Rated voltage for surge voltage class / pollution degree III/2            | 160 V  | Rated voltage for surge voltage class / pollution degree III/3        | 50 V              |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 2500 V | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 2.5 kV            |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 0.8 kV | Short-time withstand current resistance                               | 3 x 1s with 120 A |

### Rated data acc. to CSA

|                                   |  |                                   |                |
|-----------------------------------|--|-----------------------------------|----------------|
| Institute (CSA)                   | CSA  | Certificate No. (CSA)             | 200039-1202189 |
| Rated voltage (Use group B / CSA) | 50 V   | Rated voltage (Use group D / CSA) | 50 V           |
| Rated current (Use group B / CSA) | 5 A  | Rated current (Use group D / CSA) | 5 A            |
| Wire cross-section, AWG, min.     | AWG 22   | Wire cross-section, AWG, max.     | AWG 16         |
| Reference to approval values      | Specifications are maximum values, details - see approval certificate. |                                   |                |

### Rated data acc. to UL 1059

|                                       |  |                                       |        |
|---------------------------------------|--|---------------------------------------|--------|
| Institute (UR)                        | UR   | Certificate No. (UR)                  | E60693 |
| Rated voltage (Use group B / UL 1059) | 50 V   | Rated voltage (Use group D / UL 1059) | 50 V   |
| Rated current (Use group B / UL 1059) | 5 A  | Rated current (Use group D / UL 1059) | 5 A    |
| Wire cross-section, AWG, min.         | AWG 24   | Wire cross-section, AWG, max.         | AWG 16 |
| Reference to approval values          | Specifications are maximum values, details - see approval certificate. |                                       |        |

### Packing

|           |          |            |           |
|-----------|----------|------------|-----------|
| Packaging | Box      | VPE length | 169.00 mm |
| VPE width | 96.00 mm | VPE height | 42.00 mm  |

### Type tests

|   |                |  |                              |  |
|---|----------------|--|------------------------------|--|
| Test: Durability of markings                  | Standard       | draft DIN VDE 0627 section 6.2.2 / 09.91   |                              |  |
|   | Test           | mark of origin, type identification, pitch, type of material                       |                              |  |
|   | Evaluation     | available  |                              |  |
|   | Test           | durability   |                              |  |
| Test: Clampable cross section                 | Evaluation     | passed   |                              |  |
|   | Standard       | DIN EN 60999-1 section 7 and 9.1 / 12.00, DIN EN 60947-1 section 8.2.4.5.1 / 12.99 |                              |  |
|   | Conductor type | Type of conductor and conductor cross-section                                      | solid 0.2 mm <sup>2</sup>    |  |
|   |                | Type of conductor and conductor cross-section                                      | stranded 0.2 mm <sup>2</sup> |  |
|   |                | Type of conductor and conductor cross-section                                      | solid 1.5 mm <sup>2</sup>    |  |
|   |                | Type of conductor and conductor cross-section                                      | stranded 1.5 mm <sup>2</sup> |  |
| Type of conductor and conductor cross-section |                | AWG 24/1   |                              |  |

**BL-I/O 3.50/10F PNP LED SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data**

|   |   |   |                               |
|---|---|---|-------------------------------|
| Test for damage to and accidental loosening of conductors |   | Type of conductor and conductor cross-section | AWG 24/19                     |
|   |   | Type of conductor and conductor cross-section | AWG 16/1                      |
|   |   | Type of conductor and conductor cross-section | AWG 16/19                     |
|   | Evaluation                                    | passed  |                               |
|   | Standard                                      | DIN EN 60999 section 8.4 / 04.94              |                               |
|   | Requirement                                   | 0.2 kg  |                               |
|   | Conductor type                                | Type of conductor and conductor cross-section | stranded 0.05 mm <sup>2</sup> |
|   | Evaluation                                    | passed  |                               |
|   | Requirement                                   | 0.3 kg  |                               |
|   | Conductor type                                | Type of conductor and conductor cross-section | solid 0.5 mm <sup>2</sup>     |
| Pull-out test   |   | Type of conductor and conductor cross-section | AWG 24/1                      |
|   |   | Type of conductor and conductor cross-section | AWG 24/19                     |
|   | Evaluation                                    | passed  |                               |
|   | Requirement                                   | 0.4 kg  |                               |
|   | Conductor type                                | Type of conductor and conductor cross-section | solid 1.5 mm <sup>2</sup>     |
|   |   | Type of conductor and conductor cross-section | stranded 1.5 mm <sup>2</sup>  |
|   |   | Type of conductor and conductor cross-section | AWG 16/1                      |
|   |   | Type of conductor and conductor cross-section | AWG 16/19                     |
|   | Evaluation                                    | passed  |                               |
|   | Standard                                      | DIN EN 60999 section 8.5 / 04.94              |                               |
| Requirement   | ≥10 N   |   |                               |
| Conductor type  | Type of conductor and conductor cross-section | AWG 24/1                                      |                               |
|   | Type of conductor and conductor cross-section | AWG 24/19                                     |                               |
| Evaluation  | passed  |   |                               |
| Requirement   | ≥30 N   |   |                               |
| Conductor type  | Type of conductor and conductor cross-section | H05V-U0.5                                     |                               |
|   | Type of conductor and conductor cross-section | H05V-K0.5                                     |                               |
| Evaluation  | passed  |   |                               |
| Requirement   | ≥40 N   |   |                               |
| Conductor type  | Type of conductor and conductor cross-section | H05V-U1.5                                     |                               |

**BL-I/O 3.50/10F PNP LED SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data**

|            |   |           |
|------------|---|-----------|
|            | Type of conductor and conductor cross-section | H05V-K1.5 |
| Evaluation | passed  |           |

**Important note**

**IPC conformity** Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.

- Notes**
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
  - P on drawing = pitch
  - Crimp shape A for wire-end ferrules with crimping tools PZ 1,5 (order no. 9005990000) or PZ 6/5 (order no. 9011460000) for larger wire cross-sections recommended.
  - Total load-carrying capacity of the potential bridges when feeding with 1.5 mm<sup>2</sup> is max. 17.5 A (so the capacity is 2.18 A for poles 2 through 9)
  - Wire end ferrule without plastic collar to DIN 46228/1
  - Wire end ferrule with plastic collar to DIN 46228/4
  - Conductor < 0.2 mm<sup>2</sup> tinned
  - Max. outer diameter of the conductor: 2.9 mm
  - In accordance with IEC 61984, OMNIMATE-connectors are connectors without breaking capacity (COC). During designated use, connectors are not allowed to be engaged or disengaged when live or under load
  - Long term storage of the product with average temperature of 50 °C and maximum humidity 70%, 36 months

**Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 8.0    | EC002638    | ETIM 9.0    | EC002638    |
| ETIM 10.0   | EC002638    | ECLASS 14.0 | 27-46-02-02 |
| ECLASS 15.0 | 27-46-02-02 |             |             |


**BL-I/O 3.50/10F PNP LED SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


www.weidmueller.com

Drawings


Dimensional drawing

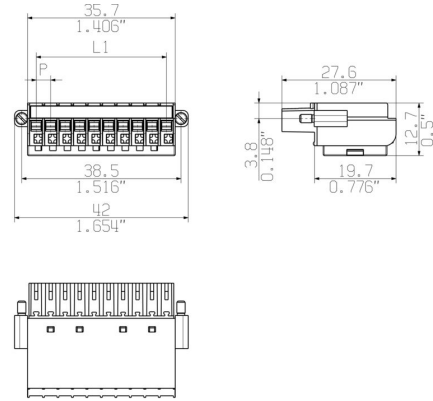

Graph

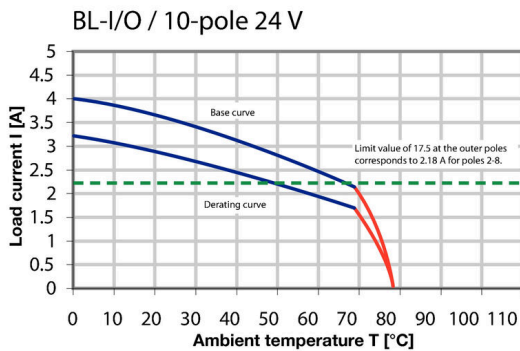

Wiring diagram

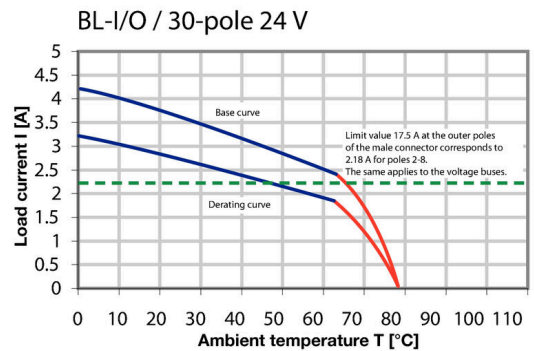

Product benefits



Solid PUSH IN contactSafe and durable

Product benefits




Multiplies the potentialLow wiring costs

**Product benefits**



PUSH IN - fast and secure  
Invented by Weidmüller

**Product benefits**

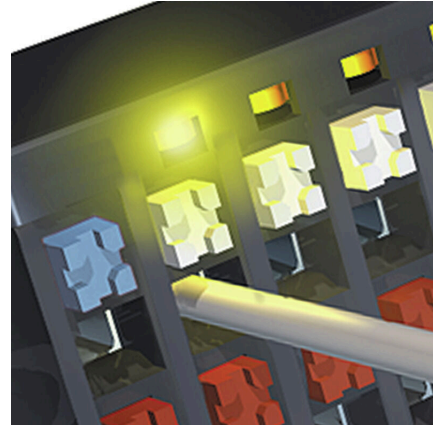

Integrated electronics  
For more space on the circuit board

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

### Coding elements



Only connects what is supposed to be connected: the right connection at the right place.  
 Coding elements and locking devices clearly assign connecting elements during the manufacturing process and operation  
 The coding elements and locking devices are inserted prior to assembly or during the cable assembly phase. The Weidmüller alternative: configure online using the variant configurator to precode prior to delivery. Incorrect assembly on the circuit board and incorrect plugging of connecting elements is no longer possible. The advantage: no troubleshooting during manufacture and no operational errors by the user.

### General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | BL SL 3.5 KO OR            | Version  |
| Order No.  | <a href="#">1693430000</a> | PCB plug-in connector, Accessories, Coding element, orange, Number |
| GTIN (EAN) | 4008190867447              | of poles: 1  |
| Qty.       | 100 ST                     |  |
| Type       | BL SL 3.5 KO SW            | Version  |
| Order No.  | <a href="#">1610100000</a> | PCB plug-in connector, Accessories, Coding element, black, Number  |
| GTIN (EAN) | 4008190187637              | of poles: 1  |
| Qty.       | 100 ST                     |  |

### Slotted screwdriver



Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

### General ordering data

|            |                            |                          |
|------------|----------------------------|--------------------------|
| Type       | SDS 0.4X2.5X75             | Version                  |
| Order No.  | <a href="#">9009030000</a> | Screwdriver, Screwdriver |
| GTIN (EAN) | 4032248266944              |                          |
| Qty.       | 1 ST                       |                          |
| Type       | SDIS 0.4X2.5X75            | Version                  |
| Order No.  | <a href="#">9008370000</a> | Screwdriver, Screwdriver |
| GTIN (EAN) | 4032248056330              |                          |
| Qty.       | 1 ST                       |                          |

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Accessories

### Crimping tools



Crimping tools for wire end ferrules, with and without plastic collars

- Ratchet guarantees precise crimping
- Release option in the event of incorrect operation

### General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | PZ 1.5                     | Version  |
| Order No.  | <a href="#">9005990000</a> | Pressing tool, Crimping tool for wire-end ferrules, 0.14mm <sup>2</sup> , 1.5mm <sup>2</sup> , |
| GTIN (EAN) | 4008190085964              | Trapezoidal crimp  |
| Qty.       | 1 ST                       |  |
| Type       | PZ 6/5                     | Version  |
| Order No.  | <a href="#">9011460000</a> | Pressing tool, Crimping tool for wire-end ferrules, 0.25mm <sup>2</sup> , 6mm <sup>2</sup> ,   |
| GTIN (EAN) | 4008190165352              | Trapezoidal indentation crimp  |
| Qty.       | 1 ST                       |  |

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Counterpart

### SLD 3.50/90G



Two-tier pin header for wave soldering in 3.50 mm pitch. The connector is available in open, closed and flange versions. The male connectors provide space for labelling and can be coded. Packed in a cardboard box.

#### General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SLD 3.50/20/90G 3.2SN O... | Version   |
| Order No.  | <a href="#">1633660000</a> | PCB plug-in connector, male header, closed side, THT solder           |
| GTIN (EAN) | 4008190258115              | connection, 3.50 mm, Number of poles: 20, 90°, Solder pin length (l): |
| Qty.       | 20 ST                      | 3.2 mm, tinned, orange, Box   |
| Type       | SLD 3.50/20/90G 4.5SN B... | Version   |
| Order No.  | <a href="#">1634350000</a> | PCB plug-in connector, male header, closed side, THT solder           |
| GTIN (EAN) | 4008190258801              | connection, 3.50 mm, Number of poles: 20, 90°, Solder pin length (l): |
| Qty.       | 20 ST                      | 4.5 mm, tinned, black, Box  |

### SL 3.50/90G



Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

#### General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL 3.50/10/90G 3.2SN BK... | Version   |
| Order No.  | <a href="#">1689780000</a> | PCB plug-in connector, male header, closed side, THT solder           |
| GTIN (EAN) | 4008190860738              | connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): |
| Qty.       | 50 ST                      | 3.2 mm, tinned, black, Box  |

### SL-SMT 3.5/180G Box



High-temperature-resistant male header, 3.50 mm pitch.

- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
- Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
- Optimised for the SMT process
- Pin length 3.2 mm universal for all soldering methods
- Pin length 1.5 mm optimised for reflow soldering methods
- Packed either in a box (BX) or tape-on-reel (RL)
- Male header can be coded

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


www.weidmueller.com

## Counterpart

### General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL-SMT 3.50/10/180G 1.5... | Version   |
| Order No.  | <a href="#">1753062001</a> | PCB plug-in connector, male header, closed side, THT/THR solder connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length (l): 1.5 mm, tinned, black, Box |
| GTIN (EAN) | 4032248130962              |   |
| Qty.       | 50 ST                      |   |

### SL-SMT 3.50/180 Box

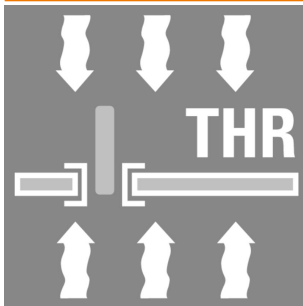

- High-temperature-resistant male header, 3.50 mm pitch.
- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
  - Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
  - Optimised for the SMT process
  - Pin length 3.2 mm universal for all soldering methods
  - Pin length 1.5 mm optimised for reflow soldering methods
  - Packed either in a box (BX) or tape-on-reel (RL)
  - Male header can be coded

### General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL-SMT 3.50/10/180 1.5S... | Version   |
| Order No.  | <a href="#">1760812001</a> | PCB plug-in connector, male header, open side, THT/THR solder connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length (l): 1.5 mm, tinned, black, Box |
| GTIN (EAN) | 4032248131273              |   |
| Qty.       | 50 ST                      |   |

### SL-SMT 3.5/90G Box



- High-temperature-resistant male header, 3.50 mm pitch.
- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
  - Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
  - Optimised for the SMT process
  - Pin length 3.2 mm universal for all soldering methods
  - Pin length 1.5 mm optimised for reflow soldering methods
  - Packed either in a box (BX) or tape-on-reel (RL)
  - Male header can be coded

### General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | SL-SMT 3.50/10/90G 1.5S... | Version  |
| Order No.  | <a href="#">1761622001</a> | PCB plug-in connector, male header, closed side, THT/THR solder connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): 1.5 mm, tinned, black, Box |
| GTIN (EAN) | 4032248132218              |  |
| Qty.       | 50 ST                      |  |

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Counterpart

## SL-SMT 3.5/90G Tape




- High-temperature-resistant male header, 3.50 mm pitch.
- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
  - Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
  - Optimised for the SMT process
  - Pin length 3.2 mm universal for all soldering methods
  - Pin length 1.5 mm optimised for reflow soldering methods
  - Packed either in a box (BX) or tape-on-reel (RL)
  - Male header can be coded

## General ordering data

| Type       | SL-SMT 3.50/10/90G 1.5S... | Version   |
|------------|----------------------------|---|
| Order No.  | <a href="#">1761624001</a> | PCB plug-in connector, male header, closed side, THT/THR solder       |
| GTIN (EAN) | 4032248136063              | connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): |
| Qty.       | 385 ST                     | 1.5 mm, tinned, black, Tape   |

## SL 3.50/90

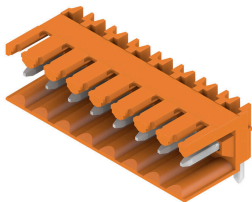


- Pin headers for wave soldering in 3.50 mm pitch
- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
  - Housing variant: screw flange (F)
  - Packed in a cardboard box (BX)
  - Pin header can be coded

## General ordering data

| Type       | SL 3.50/10/90 3.2SN OR ... | Version   |
|------------|----------------------------|---|
| Order No.  | <a href="#">1597290000</a> | PCB plug-in connector, male header, open side, THT solder             |
| GTIN (EAN) | 4008190165277              | connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): |
| Qty.       | 50 ST                      | 3.2 mm, tinned, orange, Box   |

## SL 3.50/180G



- Pin headers for wave soldering in 3.50 mm pitch
- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
  - Housing variant: screw flange (F)
  - Packed in a cardboard box (BX)
  - Pin header can be coded

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany


## Counterpart

www.weidmueller.com

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL 3.50/10/180G 3.2SN O... | Version   |
| Order No.  | <a href="#">1604550000</a> | PCB plug-in connector, male header, closed side, THT solder       |
| GTIN (EAN) | 4008190111663              | connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length |
| Qty.       | 50 ST                      | (I): 3.2 mm, tinned, orange, Box                                  |
| Type       | SL 3.50/10/180G 4.5SN O... | Version   |
| Order No.  | <a href="#">1604700000</a> | PCB plug-in connector, male header, closed side, THT solder       |
| GTIN (EAN) | 4008190058616              | connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length |
| Qty.       | 50 ST                      | (I): 4.5 mm, tinned, orange, Box                                  |

## SL 3.50/180



Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL 3.50/10/180 3.2SN OR... | Version   |
| Order No.  | <a href="#">1604850000</a> | PCB plug-in connector, male header, open side, THT solder         |
| GTIN (EAN) | 4008190096649              | connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length |
| Qty.       | 50 ST                      | (I): 3.2 mm, tinned, orange, Box                                  |
| Type       | SL 3.50/10/180 4.5 SN O... | Version   |
| Order No.  | <a href="#">1605000000</a> | PCB plug-in connector, male header, open side, THT solder         |
| GTIN (EAN) | 4008190165802              | connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length |
| Qty.       | 50 ST                      | (I): 4.5 mm, tinned, orange, Box                                  |

## SL 3.50/90G



Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL 3.50/10/90G 3.2SN OR... | Version   |
| Order No.  | <a href="#">1605150000</a> | PCB plug-in connector, male header, closed side, THT solder           |
| GTIN (EAN) | 4008190183998              | connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (I): |
| Qty.       | 50 ST                      | 3.2 mm, tinned, orange, Box   |

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

## Counterpart

www.weidmueller.com

## SL 3.50/90




Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL 3.50/10/90 4.5SN OR ... | Version   |
| Order No.  | <a href="#">1605450000</a> | PCB plug-in connector, male header, open side, THT solder             |
| GTIN (EAN) | 4008190138363              | connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): |
| Qty.       | 50 ST                      | 4.5 mm, tinned, orange, Box   |
| Type       | SL 3.50/10/90 4.5SN BK ... | Version   |
| Order No.  | <a href="#">1615360000</a> | PCB plug-in connector, male header, open side, THT solder             |
| GTIN (EAN) | 4008190053024              | connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): |
| Qty.       | 50 ST                      | 4.5 mm, tinned, black, Box  |

## SL 3.50/90G




Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL 3.50/10/90G 4.5SN BK... | Version   |
| Order No.  | <a href="#">1615470000</a> | PCB plug-in connector, male header, closed side, THT solder           |
| GTIN (EAN) | 4008190055677              | connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): |
| Qty.       | 50 ST                      | 4.5 mm, tinned, black, Box  |

## SL 3.50/180G



Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Counterpart

### General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL 3.50/10/180G 4.5SN B... | Version   |
| Order No.  | <a href="#">1616080000</a> | PCB plug-in connector, male header, closed side, THT solder       |
| GTIN (EAN) | 4008190065973              | connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length |
| Qty.       | 50 ST                      | (l): 4.5 mm, tinned, black, Box                                   |

### SL-SMT 3.5/180G Box




- High-temperature-resistant male header, 3.50 mm pitch.
- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
  - Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
  - Optimised for the SMT process
  - Pin length 3.2 mm universal for all soldering methods
  - Pin length 1.5 mm optimised for reflow soldering methods
  - Packed either in a box (BX) or tape-on-reel (RL)
  - Male header can be coded

### General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL-SMT 3.50/10/180G 3.2... | Version   |
| Order No.  | <a href="#">1836990000</a> | PCB plug-in connector, male header, closed side, THT/THR solder   |
| GTIN (EAN) | 4032248345076              | connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length |
| Qty.       | 50 ST                      | (l): 3.2 mm, tinned, black, Box                                   |

### SL-SMT 3.5/180LF Box



- High-temperature-resistant male header, 3.50 mm pitch.
- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
  - Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
  - Optimised for the SMT process
  - Pin length 3.2 mm universal for all soldering methods
  - Pin length 1.5 mm optimised for reflow soldering methods
  - Packed either in a box (BX) or tape-on-reel (RL)
  - Male header can be coded

### General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL-SMT 3.50/10/180LF 1.... | Version   |
| Order No.  | <a href="#">1804780000</a> | PCB plug-in connector, male header, Solder flange, THT/THR solder |
| GTIN (EAN) | 4032248268566              | connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length |
| Qty.       | 42 ST                      | (l): 1.5 mm, tinned, black, Box                                   |
| Type       | SL-SMT 3.50/10/180LF 3.... | Version   |
| Order No.  | <a href="#">1842620000</a> | PCB plug-in connector, male header, Solder flange, THT/THR solder |
| GTIN (EAN) | 4032248353989              | connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length |
| Qty.       | 42 ST                      | (l): 3.2 mm, tinned, black, Box                                   |

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Counterpart

## SL-SMT 3.5/90G Box




- High-temperature-resistant male header, 3.50 mm pitch.
- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
  - Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
  - Optimised for the SMT process
  - Pin length 3.2 mm universal for all soldering methods
  - Pin length 1.5 mm optimised for reflow soldering methods
  - Packed either in a box (BX) or tape-on-reel (RL)
  - Male header can be coded

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL-SMT 3.50/10/90G 3.2S... | Version   |
| Order No.  | <a href="#">1841710000</a> | PCB plug-in connector, male header, closed side, THT/THR solder       |
| GTIN (EAN) | 4032248353064              | connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): |
| Qty.       | 50 ST                      | 3.2 mm, tinned, black, Box  |

## SL-THR 3.5/135F




- High-temperature-resistant male header, 3.50 mm pitch.
- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
  - Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
  - Optimised for the SMT process
  - Pin length 3.2 mm universal for all soldering methods
  - Pin length 1.5 mm optimised for reflow soldering methods
  - Packed either in a box (BX) or tape-on-reel (RL)
  - Male header can be coded

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL-SMT 3.50/10/135F 3.2... | Version   |
| Order No.  | <a href="#">1003590000</a> | PCB plug-in connector, male header, Flange, THT/THR solder        |
| GTIN (EAN) | 4032248700219              | connection, 3.50 mm, Number of poles: 10, 135°, Solder pin length |
| Qty.       | 42 ST                      | (l): 3.2 mm, tinned, black, Box                                   |

## SL 3.50/90F



- Pin headers for wave soldering in 3.50 mm pitch
- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
  - Housing variant: screw flange (F)
  - Packed in a cardboard box (BX)
  - Pin header can be coded

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Counterpart

### General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | SL 3.50/10/90F 3.2SN DK... | Version  |
| Order No.  | <a href="#">1620140000</a> | PCB plug-in connector, male header, Flange, THT solder connection, |
| GTIN (EAN) | 4008190152437              | 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): 3.2 mm,  |
| Qty.       | 50 ST                      | tinned, Signal green, Box  |

### SLD 3.50/90F




Two-tier pin header for wave soldering in 3.50 mm pitch. The connector is available in open, closed and flange versions. The male connectors provide space for labelling and can be coded. Packed in a cardboard box.

### General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | SLD 3.50/20/90F 3.2SN O... | Version  |
| Order No.  | <a href="#">1633890000</a> | PCB plug-in connector, male header, Flange, THT solder connection, |
| GTIN (EAN) | 4008190258344              | 3.50 mm, Number of poles: 20, 90°, Solder pin length (l): 3.2 mm,  |
| Qty.       | 20 ST                      | tinned, orange, Box  |

### SLD 3.50V/180F



Double-level, staggered pin header for wave soldering at 3.50 mm pitch. They are available in closed and flanged versions. The male connectors provide space for labelling and can be coded.

### General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | SLD 3.50 V/20/180F 3.2 ... | Version  |
| Order No.  | <a href="#">1641280000</a> | PCB plug-in connector, male header, Flange, THT solder connection, |
| GTIN (EAN) | 4008190279684              | 3.50 mm, Number of poles: 20, 180°, Solder pin length (l): 3.2 mm, |
| Qty.       | 20 ST                      | tinned, orange, Box  |

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Counterpart

## SL 3.50/135F




Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | SL 3.50/10/135F 3.2SN O... | Version  |
| Order No.  | <a href="#">1643410000</a> | PCB plug-in connector, male header, Flange, THT solder connection, |
| GTIN (EAN) | 4008190282172              | 3.50 mm, Number of poles: 10, 135°, Solder pin length (l): 3.2 mm, |
| Qty.       | 42 ST                      | tinned, orange, Box  |

## SL 3.50/90F




Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | SL 3.50/10/90F 3.2SN BK... | Version  |
| Order No.  | <a href="#">1681720000</a> | PCB plug-in connector, male header, Flange, THT solder connection, |
| GTIN (EAN) | 4008190472528              | 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): 3.2 mm,  |
| Qty.       | 50 ST                      | tinned, black, Box   |

## SL-SMT 3.5/180G Tape



High-temperature-resistant male header, 3.50 mm pitch.

- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
- Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
- Optimised for the SMT process
- Pin length 3.2 mm universal for all soldering methods
- Pin length 1.5 mm optimised for reflow soldering methods
- Packed either in a box (BX) or tape-on-reel (RL)
- Male header can be coded

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Counterpart

### General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL-SMT 3.50/10/180G 1.5... | Version   |
| Order No.  | <a href="#">1753064001</a> | PCB plug-in connector, male header, closed side, THT/THR solder   |
| GTIN (EAN) | 4032248135660              | connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length |
| Qty.       | 265 ST                     | (l): 1.5 mm, tinned, black, Tape                                  |

### SL-SMT 3.5/180F Box




- High-temperature-resistant male header, 3.50 mm pitch.
- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
  - Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
  - Optimised for the SMT process
  - Pin length 3.2 mm universal for all soldering methods
  - Pin length 1.5 mm optimised for reflow soldering methods
  - Packed either in a box (BX) or tape-on-reel (RL)
  - Male header can be coded

### General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL-SMT 3.50/10/180F 1.5... | Version   |
| Order No.  | <a href="#">1761042001</a> | PCB plug-in connector, male header, Flange, THT/THR solder        |
| GTIN (EAN) | 4032248131617              | connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length |
| Qty.       | 42 ST                      | (l): 1.5 mm, tinned, black, Box                                   |
| Type       | SL-SMT 3.50/10/180F 1.5... | Version   |
| Order No.  | <a href="#">1761043001</a> | PCB plug-in connector, male header, Flange, THT/THR solder        |
| GTIN (EAN) | 4032248133420              | connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length |
| Qty.       | 36 ST                      | (l): 1.5 mm, tinned, black, Tray                                  |

### SL-SMT 3.5/90F Box

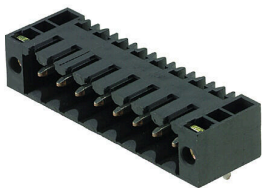

- High-temperature-resistant male header, 3.50 mm pitch.
- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
  - Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
  - Optimised for the SMT process
  - Pin length 3.2 mm universal for all soldering methods
  - Pin length 1.5 mm optimised for reflow soldering methods
  - Packed either in a box (BX) or tape-on-reel (RL)
  - Male header can be coded

### General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL-SMT 3.50/10/90F 1.5S... | Version   |
| Order No.  | <a href="#">1762082001</a> | PCB plug-in connector, male header, Flange, THT/THR solder            |
| GTIN (EAN) | 4032248132492              | connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): |
| Qty.       | 42 ST                      | 1.5 mm, tinned, black, Box  |

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

## Counterpart

www.weidmueller.com

## SL 3.50/90F



Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | SL 3.50/10/90F 3.2SN OR... | Version  |
| Order No.  | <a href="#">1607120000</a> | PCB plug-in connector, male header, Flange, THT solder connection, |
| GTIN (EAN) | 4008190079710              | 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): 3.2 mm,  |
| Qty.       | 50 ST                      | tinned, orange, Box  |

## SL 3.50/180F



Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | SL 3.50/10/180F 3.2SN O... | Version  |
| Order No.  | <a href="#">1607580000</a> | PCB plug-in connector, male header, Flange, THT solder connection, |
| GTIN (EAN) | 4008190187545              | 3.50 mm, Number of poles: 10, 180°, Solder pin length (l): 3.2 mm, |
| Qty.       | 50 ST                      | tinned, orange, Box  |

## SL 3.50/90F



Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | SL 3.50/10/90F 4.5 SN B... | Version  |
| Order No.  | <a href="#">1615600000</a> | PCB plug-in connector, male header, Flange, THT solder connection, |
| GTIN (EAN) | 4008190057633              | 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): 4.5 mm,  |
| Qty.       | 50 ST                      | tinned, black, Box   |

## BL-I/O 3.50/10F PNP LED SN BK BX

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

## Counterpart

www.weidmueller.com

## SL 3.50/180F




Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | SL 3.50/10/180F 4.5 SN ... | Version  |
| Order No.  | <a href="#">1616210000</a> | PCB plug-in connector, male header, Flange, THT solder connection, |
| GTIN (EAN) | 4008190068929              | 3.50 mm, Number of poles: 10, 180°, Solder pin length (l): 4.5 mm, |
| Qty.       | 50 ST                      | tinned, black, Box   |

## SL-SMT 3.5/90LF Box



High-temperature-resistant male header, 3.50 mm pitch.

- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
- Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
- Optimised for the SMT process
- Pin length 3.2 mm universal for all soldering methods
- Pin length 1.5 mm optimised for reflow soldering methods
- Packed either in a box (BX) or tape-on-reel (RL)
- Male header can be coded

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL-SMT 3.50/10/90LF 3.2... | Version   |
| Order No.  | <a href="#">1841940000</a> | PCB plug-in connector, male header, Solder flange, THT/THR solder     |
| GTIN (EAN) | 4032248353293              | connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): |
| Qty.       | 42 ST                      | 3.2 mm, tinned, black, Box  |
| Type       | SL-SMT 3.50/10/90LF 1.5... | Version   |
| Order No.  | <a href="#">1805020000</a> | PCB plug-in connector, male header, Solder flange, THT/THR solder     |
| GTIN (EAN) | 4032248268924              | connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): |
| Qty.       | 42 ST                      | 1.5 mm, tinned, black, Box  |

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Counterpart

## SL-SMT 3.5/180F Box



- High-temperature-resistant male header, 3.50 mm pitch.
- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
  - Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
  - Optimised for the SMT process
  - Pin length 3.2 mm universal for all soldering methods
  - Pin length 1.5 mm optimised for reflow soldering methods
  - Packed either in a box (BX) or tape-on-reel (RL)
  - Male header can be coded

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL-SMT 3.50/10/180F 3.2... | Version   |
| Order No.  | <a href="#">1842850000</a> | PCB plug-in connector, male header, Flange, THT/THR solder        |
| GTIN (EAN) | 4032248354313              | connection, 3.50 mm, Number of poles: 10, 180°, Solder pin length |
| Qty.       | 42 ST                      | (I): 3.2 mm, tinned, black, Box                                   |

## SL-SMT 3.5/90F Box



- High-temperature-resistant male header, 3.50 mm pitch.
- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
  - Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
  - Optimised for the SMT process
  - Pin length 3.2 mm universal for all soldering methods
  - Pin length 1.5 mm optimised for reflow soldering methods
  - Packed either in a box (BX) or tape-on-reel (RL)
  - Male header can be coded

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SL-SMT 3.50/10/90F 3.2S... | Version   |
| Order No.  | <a href="#">1842160000</a> | PCB plug-in connector, male header, Flange, THT/THR solder            |
| GTIN (EAN) | 4032248353514              | connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (I): |
| Qty.       | 42 ST                      | 3.2 mm, tinned, black, Box  |

## SL-SMT 3.5/90LF Tape



- High-temperature-resistant male header, 3.50 mm pitch.
- Plugging direction parallel (90°), straight 180° or angled (135°) to PCB
  - Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)
  - Optimised for the SMT process
  - Pin length 3.2 mm universal for all soldering methods
  - Pin length 1.5 mm optimised for reflow soldering methods
  - Packed either in a box (BX) or tape-on-reel (RL)
  - Male header can be coded

## BL-I/O 3.50/10F PNP LED SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

## Counterpart

[www.weidmueller.com](http://www.weidmueller.com)

### General ordering data

|            |                            |   |  |
|------------|----------------------------|---|--|
| Type       | SL-SMT 3.50/10/90LF 1.5... | Version   |  |
| Order No.  | <a href="#">1005180000</a> | PCB plug-in connector, male header, Solder flange, THT/THR solder     |  |
| GTIN (EAN) | 4032248704545              | connection, 3.50 mm, Number of poles: 10, 90°, Solder pin length (l): |  |
| Qty.       | 385 ST                     | 1.5 mm, tinned, black, Tape   |  |