

SAIL-VSA-3.0U(0.5)**Weidmüller Interface GmbH & Co. KG**Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com



Weidmüller can supply valve plugs as connecting lines with M8/M12 plugs and one end without connector. The status of the valve plug is shown by an LED. The valve plugs have a protective circuit. The Weidmüller range includes valve plugs of type A, B and C to DIN and industry standards. Protection class IP 67 is fulfilled when screwed in. The outlet direction is also a decisive factor, therefore Weidmüller offers different versions.

General ordering data

Version	Valve cable (assembled), One end without connector - valve plug, Design A (18 mm), Cable length: 3 m, PUR, black
Order No.	1845120300
Type	SAIL-VSA-3.0U(0.5)
GTIN (EAN)	4032248358045
Qty.	1 items

SAIL-VSA-3.0U(0.5)**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Approvals**

Approvals



ROHS

Conform

Dimensions and weights

Net weight

104.72 g

Environmental Product Compliance

RoHS Compliance Status

Compliant without exemption

REACH SVHC

No SVHC above 0.1 wt%

Technical specifications for cable

Cable length

3 m

Suitable for cable carriers

Yes

Shielded

No

Sheath material

PUR

Number of poles

3

Sheathing colour

black

Core cross-section

0.5 mm²

Halogen

No

Temperature range, moving

-25...80 °C

Outside diameter

4.6 mm ± 0.2 mm

General technical data

Coding

Design A (18 mm)

Contact surface

tinned

Version

One end without
connector - valve plug

Connection thread

Miscellaneous

LED

Yes

Contact material

CuZn

Nominal voltage

24 V

Nominal current

4 A

Protection degree

IP67, when screwed in

All valve plugs are fitted with protective
Suppressor diode
circuits

Temperature range of housing

-25...+80 °C

Classifications

ETIM 8.0

EC001855

ETIM 9.0

EC001855

ETIM 10.0

EC001855

ECLASS 14.0

27-06-03-12

ECLASS 15.0


27-06-03-12

Drawings

Dimensioned drawing



Pole scheme

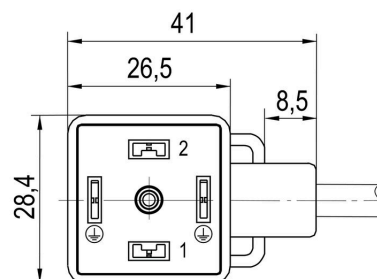

Wiring diagram

