


## MF 10/8 MC SDR

Weidmüller Interface GmbH & Co. KG  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

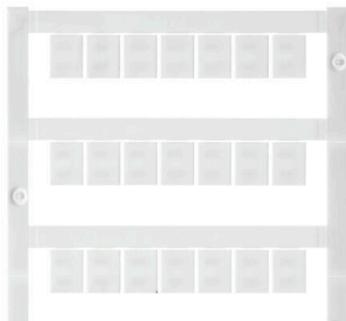

Similar to illustration

MultiFit is the Weidmüller marker system used for other makes of terminals. Similar to the Weidmüller Dekafix, the markers of the MultiFit family are available ready-for-use with standard printing.

We recommend to carry out a test with sample markers on the terminals used when using MultiFit for the first time.

- One marker, suitable for different makes of terminals.
- Ready-to-use markers with standard printing
- Blank markers for printing with the PrintJet CONNECT or Plotter
- Delivery of individually printed markers according to customer CAE data or specifications
- One marking system for all applications

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

#### General ordering data

Version	MultiFit, Terminal marker, 10 x 8 mm, Pitch in mm (P): 8.00 Phoenix, Entrellec, To customer specification
Order No.	<a href="#">1868430000</a>
Type	MF 10/8 MC SDR
GTIN (EAN)	4032248440016
Qty.	70 items

## MF 10/8 MC SDR

Weidmüller Interface GmbH & Co. KG  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

## Approvals

RoHS	Conform
------	---------

## Dimensions and weights

Height	10 mm	Height (inches)	0.3937 inch
Width	8 mm	Width (inches)	0.315 inch
Net weight	0.2 g		

## Temperatures

Operating temperature range	-40...100 °C
-----------------------------	--------------

## Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%
Product Carbon Footprint	Cradle to gate 0.002 kg CO2 eq.

## General data

Orientation of print	horizontal and vertical	
Printing method	MC Laser	
Width	8 mm	
UL 94 flammability rating	V-2	
Operating temperature range, max.	100 °C	
Operating temperature range, min.	-40 °C	
Colour	To customer specification	
Halogen	No	
Basic material	Polyamide 66	
Colour of printing	black	
Printed characters	Requires M-Print PRO File	
Number of markers per packaging unit	Form of supply	MultiCard
Number of markers per combination	1 MultiCard = Terminal marker	
Operating temperature range	-40...100 °C	
Application/manufacturer	Phoenix, Entrellec	

## Connector markers

Pitch in mm (P)	8.00 mm
-----------------	---------


## Classifications

ETIM 8.0	EC000761	ETIM 9.0	EC000761
ETIM 10.0	EC000761	ECLASS 14.0	27-28-11-01
ECLASS 15.0	27-28-11-01		

**MF 10/8 MC SDR**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

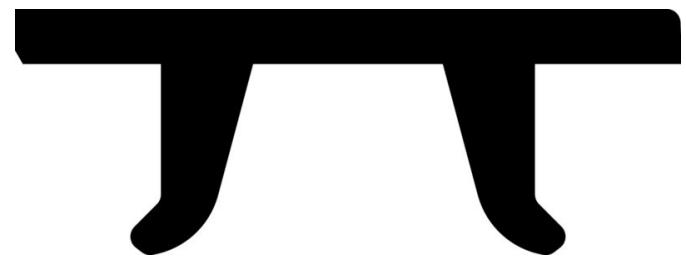**Drawings****Drawing**