Data sheet

# WKS 2/4

**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

## Product image

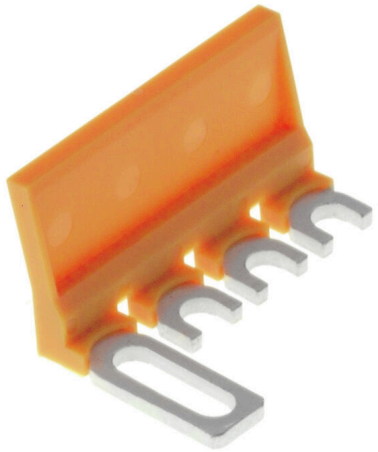

The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

### General ordering data

| | |
|---|---|
| Version | Accessories, Cross-connection slider, x 29.9 |
| Order No. | 1936160000 |
| Type | WKS 2/4 |
| GTIN (EAN) | 4032248605880 |
| Qty. | 50 items |

# WKS 2/4

**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

## Technical data

### Approvals

| | |
|---|---|
| ROHS | Conform |

### Dimensions and weights

| | | | |
|---|---|---|---|
| Depth | 16.1 mm | Depth (inches) | 0.6339 inch |
| Height | 18.86 mm | Height (inches) | 0.7425 inch |
| Width | 29.9 mm | Width (inches) | 1.1772 inch |
| Net weight | 3.94 g | | |

### Temperatures

| | | | |
|---|---|---|---|
| Ambient temperature | -5 °C...40 °C | Continuous operating temp., min. | -50 °C |
| Continuous operating temp., max. | 100 °C | | |

### Environmental Product Compliance

| | |
|---|---|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC | No SVHC above 0.1 wt% |

### Material data

| | | | |
|---|---|---|---|
| Basic material | Polyamide 66 | Colour | orange |
| UL 94 flammability rating | V-2 | | |

### System specifications

| | |
|---|---|
| Version | Cross-connector |

### Additional technical data

| | | | |
|---|---|---|---|
| Type of fixing | when screwed in | Installation advice | Direct mounting |
| Explosion-tested version | No | Type of mounting | when screwed in |

### Dimensions

| | |
|---|---|
| Pitch in mm (P) | 7.90 mm |

### General

| | | | |
|---|---|---|---|
| Number of poles | 4 | Installation advice | Direct mounting |
| Operating temperature range, max. | 100 °C | | |

### Rating data

| | | | |
|---|---|---|---|
| Rated voltage | 400 V | Nominal current | 41 A |

### Classifications

| | | | |
|---|---|---|---|
| ETIM 8.0 | EC000489 | ETIM 9.0 | EC000489 |
| ETIM 10.0 | EC000489 | ECLASS 14.0 | 27-25-03-03 |
| ECLASS 15.0 | 27-25-03-03 | | |