

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Product image

Fuse terminal blocks and component terminal blocks allow protective and functional elements to be integrated directly into the terminal strip. Fuse terminal blocks include built-in fuse holders to reliably protect electrical circuits against overload —ideal for control and distribution systems. Component terminal blocks make it possible to incorporate electronic components such as diodes, resistors, or LEDs directly into the wiring. This enables space-saving and clearly arranged implementation of switching functions and signal separation. Both types of terminal blocks ensure higher safety, easy maintenance, and a compact, function-oriented installation.

General ordering data

| | |
|------------|---|
| Version | Fuse terminal, PUSH IN, 4 mm ² , 250 V, 6.3 A, black |
| Order No. | 2434390000 |
| Type | AFS 4 2C 100-250V BK |
| GTIN (EAN) | 4050118445114 |
| Qty. | 50 items |

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Approvals

Approvals



| | |
|-------------------------|----------------------------|
| RoHS | Conform |
| UL File Number Search | UL Website |
| Certificate No. (cURus) | E60693 |

Dimensions and weights

| | | | |
|--------------------------|-------------|----------------|-------------|
| Depth | 68 mm | Depth (inches) | 2.6772 inch |
| Depth including DIN rail | 69 mm | Height | 74 mm |
| Height (inches) | 2.9134 inch | Width | 6.1 mm |
| Width (inches) | 0.2402 inch | Net weight | 17.75 g |

Temperatures

| | | | |
|----------------------------------|----------------|----------------------------------|---------------|
| Storage temperature | -25 °C...55 °C | Ambient temperature | -5 °C...40 °C |
| Continuous operating temp., min. | -60 °C | Continuous operating temp., max. | 130 °C |

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC | No SVHC above 0.1 wt% |

Material data

| | | | |
|---------------------------|-------|--------|-------|
| Basic material | Wemid | Colour | black |
| UL 94 flammability rating | V-0 | | |

Rating data IECEx/ATEX

| | | | |
|------------------------|-----------------|---------------------------------|-------------------|
| Certificate No. (ATEX) | TUEV17ATEX8064U | Certificate No. (IECEx) | IECEXTUR17.0030U |
| Current (ATEX) | 6.3 A | Wire cross section max. (ATEX) | 4 mm ² |
| Current (IECEx) | 6.3 A | Wire cross section max. (IECEx) | 4 mm ² |
| Marking EN 60079-7 | Ex ec II C Gc | Ex 2014/34/EU label | II 3 G D |

System specifications

| | | | |
|-------------------------------|-----|-------------------------------------|-------|
| End cover plate required | Yes | Number of potentials | 1 |
| Number of levels | 1 | Number of clamping points per level | 2 |
| Number of potentials per tier | 1 | Levels cross-connected internally | Yes |
| PE connection | No | Mounting rail | TS 35 |
| N-function | No | PE function | No |
| PEN function | No | | |

Additional technical data

| | | | |
|-------------------|----|----------------|---------|
| With snap-in pegs | No | Open sides | right |
| Snap-on | No | Type of fixing | Snap-on |

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

| Installation advice | Rail | Type of mounting | TS 35 |
|---|----------------------|-----------------------|---------------------|
| CSA rating data | | | |
| Wire cross section max. (CSA) | 10 AWG | Voltage size C (CSA) | 150 V |
| Current size C (CSA) | 10 A | Certificate No. (CSA) | 200039-70089609 |
| Voltage size B (CSA) | 300 V | Current size B (CSA) | 10 A |
| Voltage size D (CSA) | 300 V | Current size D (CSA) | 10 A |
| Wire cross section min. (CSA) | 26 AWG | | |
| Conductors for clamping (additional connection) | | | |
| Connection type, additional connection PUSH IN | | | |
| Conductors for clamping (rated connection) | | | |
| Gauge to IEC 60947-1 | A4 | | |
| Wire connection cross section AWG, max. | AWG 12 | | |
| Connection direction | top | | |
| Stripping length | 12 mm | | |
| Type of connection 2 | PUSH IN | | |
| Type of connection | PUSH IN | | |
| Number of connections | 2 | | |
| Clamping range, max. | 6 mm ² | | |
| Clamping range, min. | 0.14 mm ² | | |
| Blade size | 0.6 x 3.5 mm | | |
| Wire connection cross section AWG, min. | AWG 26 | | |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 4 mm ² | | |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.14 mm ² | | |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 6 mm ² | | |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.14 mm ² | | |
| Wire connection cross section, finely stranded, max. | 6 mm ² | | |
| Wire connection cross section, finely stranded, min. | 0.14 mm ² | | |
| Connection cross-section, stranded, max. | 6 mm ² | | |
| Connection cross-section, stranded, min. 0.14 mm ² | | | |
| Twin wire-end ferrules, max. | 1.5 mm ² | | |
| Twin wire-end ferrules, min. | 0.5 mm ² | | |
| Wire connection cross-section, solid core, max. | 4 mm ² | | |
| Wire connection cross-section, solid core, min. | 0.14 mm ² | | |
| Connection cross-section, finely stranded, min. | 0.14 mm ² | | |
| Tube length for wire-end ferrule with plastic collar DIN 46228/4 | Tube length | min. | 6 mm |
| | | max. | 12 mm |
| Cross-section for conductor connection | | min. | 0.5 mm ² |
| | | max. | 1 mm ² |

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

| | | | |
|---|--|---------|---------------------|
| Tube length for twin wire-end ferrule | Tube length | min. | 8 mm |
| | Tube length | max. | 12 mm |
| | Cross-section for conductor connection | min. | 1.5 mm ² |
| | Cross-section for conductor connection | max. | 2.5 mm ² |
| | Tube length | min. | 10 mm |
| | Tube length | max. | 12 mm |
| | Cross-section for conductor connection | nominal | 4 mm ² |
| | Tube length | min. | 8 mm |
| | Tube length | max. | 12 mm |
| | Cross-section for conductor connection | min. | 0.5 mm ² |
| Tube length for wire-end ferrule without plastic collar DIN 46228/1 | Tube length | max. | 1.5 mm ² |
| | Tube length | min. | 6 mm |
| | Tube length | max. | 10 mm |
| | Cross-section for conductor connection | min. | 0.5 mm ² |
| | Cross-section for conductor connection | max. | 1 mm ² |
| | Tube length | min. | 7 mm |
| | Tube length | max. | 12 mm |
| | Cross-section for conductor connection | min. | 1.5 mm ² |
| | Cross-section for conductor connection | max. | 2.5 mm ² |
| | Tube length | min. | 9 mm |
| Cross-section for conductor connection | Tube length | max. | 15 mm |
| | Tube length | min. | 4 mm ² |
| | Tube length | max. | 6 mm ² |

General

| | | | |
|---|--------|---------------------|------------------|
| Wire connection cross section AWG, max. | AWG 12 | Installation advice | Rail |
| Wire connection cross section AWG, min. | AWG 26 | Standards | DIN EN 60947-7-3 |
| Mounting rail | TS 35 | | |

Rating data

| | | | |
|-------------------------------------|-------------------|--|--------|
| Rated cross-section | 4 mm ² | Rated voltage | 250 V |
| Rated voltage to adjoining terminal | 500 V | Rated DC voltage | 250 V |
| Nominal current | 6.3 A | Current at maximum wires | 6.3 A |
| Standards | DIN EN 60947-7-3 | Volume resistance according to IEC 60947-7-x | 1 mΩ |
| Rated impulse withstand voltage | 4 kV | Power loss in accordance with IEC 60947-7-x | 1.02 W |
| Surge voltage category | III | Pollution severity | 3 |

UL rating data

| | | | |
|--|--------|--|--------|
| Conductor size Factory wiring max. (cURus) | 10 AWG | Voltage size B (cURus) | 300 V |
| Voltage size D (cURus) | 300 V | Certificate No. (cURus) | E60693 |
| Conductor size Field wiring min. (cURus) | 26 AWG | Conductor size Factory wiring min. (cURus) | 26 AWG |
| Current size B (cURus) | 10 A | Voltage size C (cURus) | 150 V |
| Current size C (cURus) | 10 A | Current size D (cURus) | 10 A |
| Conductor size Field wiring max. (cURus) | 10 AWG | | |

Important note

| | |
|---------------------|--|
| Product information | The voltage depends on the selected fuse element or the selected indicator light |
|---------------------|--|

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data**Classifications**



| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 8.0 | EC000899 | ETIM 9.0 | EC000899 |
| ETIM 10.0 | EC000899 | ECLASS 14.0 | 27-25-01-13 |
| ECLASS 15.0 | 27-25-01-13 | | |

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

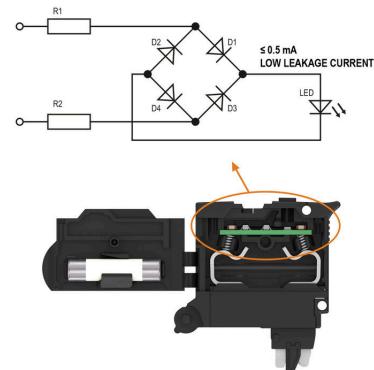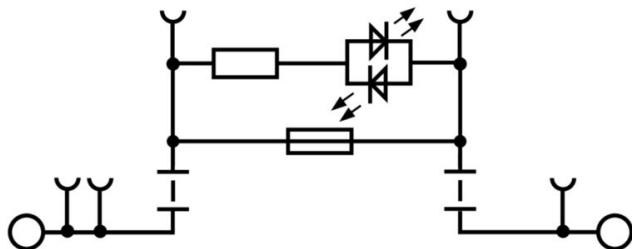

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

Cross-connections



The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | ZQV 4N/9 RD | Version |
| Order No. | 2460750000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 9, Pitch in mm (P): 6.10, Insulated: Yes, Width: 52.6 mm |
| GTIN (EAN) | 4050118476170 | |
| Qty. | 20 ST | |
| Type | ZQV 4N/9 BL | Version |
| Order No. | 1528220000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 9, Pitch in mm (P): 6.10, Insulated: Yes, Width: 52.6 mm |
| GTIN (EAN) | 4050118333107 | |
| Qty. | 20 ST | |
| Type | ZQV 4N/9 | Version |
| Order No. | 1528070000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: 9, Pitch in mm (P): 6.10, Insulated: Yes, Width: 52.6 mm |
| GTIN (EAN) | 4050118332797 | |
| Qty. | 20 ST | |
| Type | ZQV 4N/8 RD | Version |
| Order No. | 2460760000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 8, Pitch in mm (P): 6.10, Insulated: Yes, Width: 46.5 mm |
| GTIN (EAN) | 4050118476187 | |
| Qty. | 20 ST | |
| Type | ZQV 4N/8 BL | Version |
| Order No. | 1528190000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 8, Pitch in mm (P): 6.10, Insulated: Yes, Width: 46.5 mm |
| GTIN (EAN) | 4050118332858 | |
| Qty. | 20 ST | |
| Type | ZQV 4N/8 | Version |
| Order No. | 1528030000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: 8, Pitch in mm (P): 6.10, Insulated: Yes, Width: 46.5 mm |
| GTIN (EAN) | 4050118332841 | |
| Qty. | 20 ST | |
| Type | ZQV 4N/7 RD | Version |
| Order No. | 2460770000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 7, Pitch in mm (P): 6.10, Insulated: Yes, Width: 40.4 mm |
| GTIN (EAN) | 4050118476194 | |
| Qty. | 20 ST | |
| Type | ZQV 4N/7 BL | Version |
| Order No. | 1528180000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 7, Pitch in mm (P): 6.10, Insulated: Yes, Width: 40.4 mm |
| GTIN (EAN) | 4050118333114 | |
| Qty. | 20 ST | |
| Type | ZQV 4N/6 RD | Version |
| Order No. | 2460780000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 6, Pitch in mm (P): 6.10, Insulated: Yes, Width: 34.3 mm |
| GTIN (EAN) | 4050118476200 | |
| Qty. | 20 ST | |
| Type | ZQV 4N/6 BL | Version |
| Order No. | 1528170000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 6, Pitch in mm (P): 6.10, Insulated: Yes, Width: 34.3 mm |
| GTIN (EAN) | 4050118332926 | |
| Qty. | 20 ST | |

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|---|
| Type | ZQV 4N/10 | Version |
| Order No. | 1528090000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: 10, Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm |
| GTIN (EAN) | 4050118332896 | |
| Qty. | 20 ST | |
| Type | ZQV 4N/10 BL | Version |
| Order No. | 1528230000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 10, Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm |
| GTIN (EAN) | 4050118333138 | |
| Qty. | 20 ST | |
| Type | ZQV 4N/10 RD | Version |
| Order No. | 2460740000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 10, Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm |
| GTIN (EAN) | 4050118476163 | |
| Qty. | 20 ST | |
| Type | ZQV 4N/2 | Version |
| Order No. | 1527930000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: 2, Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm |
| GTIN (EAN) | 4050118332766 | |
| Qty. | 60 ST | |
| Type | ZQV 4N/2 BL | Version |
| Order No. | 1528040000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 2, Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm |
| GTIN (EAN) | 4050118332773 | |
| Qty. | 60 ST | |
| Type | ZQV 4N/2 RD | Version |
| Order No. | 2460450000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 2, Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm |
| GTIN (EAN) | 4050118476149 | |
| Qty. | 60 ST | |
| Type | ZQV 4N/3 | Version |
| Order No. | 1527940000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: 3, Pitch in mm (P): 6.10, Insulated: Yes, Width: 16 mm |
| GTIN (EAN) | 4050118332865 | |
| Qty. | 60 ST | |
| Type | ZQV 4N/3 BL | Version |
| Order No. | 1528080000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 3, Pitch in mm (P): 6.10, Insulated: Yes, Width: 16 mm |
| GTIN (EAN) | 4050118333008 | |
| Qty. | 60 ST | |
| Type | ZQV 4N/3 RD | Version |
| Order No. | 2460810000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 3, Pitch in mm (P): 6.10, Insulated: Yes, Width: 16 mm |
| GTIN (EAN) | 4050118476231 | |
| Qty. | 60 ST | |
| Type | ZQV 4N/4 | Version |
| Order No. | 1527970000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: 4, Pitch in mm (P): 6.10, Insulated: Yes, Width: 22.1 mm |
| GTIN (EAN) | 4050118332889 | |
| Qty. | 60 ST | |
| Type | ZQV 4N/4 BL | Version |
| Order No. | 1528120000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 4, Pitch in mm (P): 6.10, Insulated: Yes, Width: 22.1 mm |
| GTIN (EAN) | 4050118332872 | |
| Qty. | 60 ST | |
| Type | ZQV 4N/4 RD | Version |
| Order No. | 2460800000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 4, Pitch in mm (P): 6.10, Insulated: Yes, Width: 22.1 mm |
| GTIN (EAN) | 4050118476224 | |
| Qty. | 60 ST | |
| Type | ZQV 4N/5 | Version |
| Order No. | 1527980000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: 5, Pitch in mm (P): 6.10, Insulated: Yes, Width: 28.2 mm |
| GTIN (EAN) | 4050118332759 | |
| Qty. | 60 ST | |

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|---|
| Type | ZQV 4N/5 BL | Version |
| Order No. | 1528140000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 5, |
| GTIN (EAN) | 4050118333015 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 28.2 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/5 RD | Version |
| Order No. | 2460790000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 5, |
| GTIN (EAN) | 4050118476217 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 28.2 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/50 | Version |
| Order No. | 1528130000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118332902 | 50, Pitch in mm (P): 6.10, Insulated: Yes, Width: 303.7 mm |
| Qty. | 5 ST | |
| Type | ZQV 4N/50 BL | Version |
| Order No. | 1528240000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 50, |
| GTIN (EAN) | 4050118333121 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 303.7 mm |
| Qty. | 5 ST | |
| Type | ZQV 4N/50 RD | Version |
| Order No. | 2460730000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 50, |
| GTIN (EAN) | 4050118476156 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 303.7 mm |
| Qty. | 5 ST | |
| Type | ZQV 4N/6 | Version |
| Order No. | 1527990000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118332919 | 6, Pitch in mm (P): 6.10, Insulated: Yes, Width: 34.3 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/7 | Version |
| Order No. | 1528020000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118332780 | 7, Pitch in mm (P): 6.10, Insulated: Yes, Width: 40.4 mm |
| Qty. | 20 ST | |

End plates and partition plates



Partition plates and end plates are essential accessories for terminal blocks. Partition plates provide optical and electrical separation of different potentials and functional groups, increasing safety and ensuring a clear structure inside the control cabinet. End plates close the terminal block row on the sides, protect against contact with live parts, and ensure a clean, stable finish. Both components are precisely matched to the respective Weidmüller terminal block series, contributing to safe, compliant, and professional wiring.

General ordering data

| | | |
|------------|----------------------------|---------------------|
| Type | AEP 3C 4 BK | Version |
| Order No. | 2486640000 | A-series, End plate |
| GTIN (EAN) | 4050118497458 | |
| Qty. | 20 ST | |

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

End bracket



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

| | | |
|------------|----------------------------|-----------------------|
| Type | AEB 35 SC/1 BK | Version |
| Order No. | 2475310000 | A-series, End bracket |
| GTIN (EAN) | 4050118487114 | |
| Qty. | 50 ST | |

Additional accessories



No task is too small when creating the perfect solution. Connections form just one part of the overall process. Small details are often the key to the perfect solution in applications where potentials are tested, grouped or even isolated.

A system is not a system without small but essential details:

- Test plugs ensure reliable pick-up from diagnostic sockets

In tandem with the manufacturing process and application.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | PS 2.0 MC | Version |
| Order No. | 0310000000 | PCB plug-in connector, Accessories, Test plug, red, Number of poles: |
| GTIN (EAN) | 4008190000059 | 1 |
| Qty. | 20 ST | |

Accessories



Accessories for testing and measuring equipment

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

General ordering data

| | | |
|------------|----------------------------|------------|
| Type | ZUB MULTIMETER | Version |
| Order No. | 9205270000 | Multimeter |
| GTIN (EAN) | 4032248723522 | |
| Qty. | 1 ST | |

Plus



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.


- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/6 PLUS MC NE WS | Version |
| Order No. | 1011320000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4032248717644 | Weidmueller, white |
| Qty. | 1000 ST | |

Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text.

WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/oder Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | WS 10/6 M PLUS MC NE WS | Version |
| Order No. | 2003780000 | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4050118424461 | Allen-Bradley, white |
| Qty. | 600 ST | |

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

DEK 5/6



WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | |
|------------|----------------------------|--|
| Type | DEK 5/6 MM WS | Version |
| Order No. | 2007120000 | Dekafix, Terminal marker, 5 x 6 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392104 | |
| Qty. | 600 ST | |

WS 8/6



WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | |
|------------|----------------------------|---|
| Type | WS 8/6 MM WS | Version |
| Order No. | 2007160000 | WS, Terminal marker, 8 x 6 mm, Weidmueller, white |
| GTIN (EAN) | 4050118391879 | |
| Qty. | 600 ST | |

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

End plates and partition plates



Partition plates and end plates are essential accessories for terminal blocks. Partition plates provide optical and electrical separation of different potentials and functional groups, increasing safety and ensuring a clear structure inside the control cabinet. End plates close the terminal block row on the sides, protect against contact with live parts, and ensure a clean, stable finish. Both components are precisely matched to the respective Weidmüller terminal block series, contributing to safe, compliant, and professional wiring.

General ordering data

| | | |
|------------|----------------------------|---------------------|
| Type | AEP 3C 4 | Version |
| Order No. | 2051720000 | A-series, End plate |
| GTIN (EAN) | 4050118411829 | |
| Qty. | 20 ST | |
| Type | AEP 3C 4 BL | Version |
| Order No. | 2051880000 | A-series, End plate |
| GTIN (EAN) | 4050118411836 | |
| Qty. | 20 ST | |
| Type | AEP 3C 4 OR | Version |
| Order No. | 2051890000 | A-series, End plate |
| GTIN (EAN) | 4050118411799 | |
| Qty. | 20 ST | |

Feed-through and PE terminal Blocks



To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | A3C 4 | Version |
| Order No. | 2051240000 | Feed-through terminal, PUSH IN, 4 mm ² , 800 V, 32 A, dark beige |
| GTIN (EAN) | 4050118411546 | |
| Qty. | 50 ST | |
| Type | A3C 4 BK | Version |
| Order No. | 2051400000 | Feed-through terminal, PUSH IN, 4 mm ² , 800 V, 32 A, black |
| GTIN (EAN) | 4050118411560 | |
| Qty. | 50 ST | |
| Type | A3C 4 BL | Version |
| Order No. | 2051280000 | Feed-through terminal, PUSH IN, 4 mm ² , 800 V, 32 A, blue |
| GTIN (EAN) | 4050118411614 | |
| Qty. | 50 ST | |

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|---|
| Type | A3C 4 BR | Version |
| Order No. | 2534290000 | Feed-through terminal, PUSH IN, 4 mm ² , 800 V, 32 A, brown |
| GTIN (EAN) | 4050118546040 | |
| Qty. | 50 ST | |
| Type | A3C 4 DBL | Version |
| Order No. | 2534360000 | Feed-through terminal, PUSH IN, 4 mm ² , 800 V, 32 A, Dark Blue |
| GTIN (EAN) | 4050118546057 | |
| Qty. | 50 ST | |
| Type | A3C 4 GN | Version |
| Order No. | 2051350000 | Feed-through terminal, PUSH IN, 4 mm ² , 800 V, 32 A, green |
| GTIN (EAN) | 4050118411584 | |
| Qty. | 50 ST | |
| Type | A3C 4 LTGY | Version |
| Order No. | 2051460000 | Feed-through terminal, PUSH IN, 4 mm ² , 800 V, 32 A, Light Grey |
| GTIN (EAN) | 4050118411553 | |
| Qty. | 50 ST | |
| Type | A3C 4 OR | Version |
| Order No. | 2051320000 | Feed-through terminal, PUSH IN, 4 mm ² , 800 V, 32 A, orange |
| GTIN (EAN) | 4050118411386 | |
| Qty. | 50 ST | |
| Type | A3C 4 RD | Version |
| Order No. | 2051300000 | Feed-through terminal, PUSH IN, 4 mm ² , 800 V, 32 A, red |
| GTIN (EAN) | 4050118411591 | |
| Qty. | 50 ST | |
| Type | A3C 4 WT | Version |
| Order No. | 2051370000 | Feed-through terminal, PUSH IN, 4 mm ² , 800 V, 32 A, white |
| GTIN (EAN) | 4050118411812 | |
| Qty. | 50 ST | |
| Type | A3C 4 YL | Version |
| Order No. | 2051340000 | Feed-through terminal, PUSH IN, 4 mm ² , 800 V, 32 A, yellow |
| GTIN (EAN) | 4050118411669 | |
| Qty. | 50 ST | |
| Type | A3C 4 PE | Version |
| Order No. | 2051410000 | PE terminal, PUSH IN, 4 mm ² , Green/yellow |
| GTIN (EAN) | 4050118411713 | |
| Qty. | 50 ST | |

Test-disconnect terminal blocks



In some applications it makes sense to add a test point or a disconnect element to the feed through terminal for testing and safety purposes. With test disconnect terminals you measure electric circuits in the absence of voltage. While the disconnecting points clearance and creepage distance is not assessed in dimensional terms, the specified rated impulse voltage strength must be proven.

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

General ordering data

| | | |
|------------|----------------------------|--|
| Type | ADT 4 2C | Version |
| Order No. | 2429850000 | Test-disconnect terminal, PUSH IN, 4 mm ² , 500 V, 20 A, dark beige |
| GTIN (EAN) | 4050118439724 | |
| Qty. | 50 ST | |
| Type | ADT 4 2C BL | Version |
| Order No. | 2429880000 | Test-disconnect terminal, PUSH IN, 4 mm ² , 500 V, 20 A, blue |
| GTIN (EAN) | 4050118439670 | |
| Qty. | 50 ST | |
| Type | ADT 4 2C OR | Version |
| Order No. | 2429890000 | Test-disconnect terminal, PUSH IN, 4 mm ² , 500 V, 20 A, orange |
| GTIN (EAN) | 4050118439687 | |
| Qty. | 50 ST | |

Fuse



As accessories for our wide product portfolio of fuse terminal blocks, we also offer the appropriate fuse links. The portfolio includes device protection fuses (miniature fuses) from 5x20 mm up to 10x38 mm, E 14 to E 18 fuse links, as well as automotive fuses and automatic circuit breakers. Gauge rings for the fuse holders round off the overall portfolio.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | G 20/0.25A/F | Version |
| Order No. | 0430500000 | Miniature fuse, quick-acting, 0.25 A, G-Si. 5 x 20 |
| GTIN (EAN) | 4008190153991 | |
| Qty. | 10 ST | |
| Type | G 20/0.50A/F | Version |
| Order No. | 0430600000 | Miniature fuse, quick-acting, 0.5 A, G-Si. 5 x 20 |
| GTIN (EAN) | 4008190046835 | |
| Qty. | 10 ST | |
| Type | G 20/1.00A/F | Version |
| Order No. | 0430700000 | Miniature fuse, quick-acting, 1 A, G-Si. 5 x 20 |
| GTIN (EAN) | 4008190093877 | |
| Qty. | 10 ST | |
| Type | G 20/2.00A/F | Version |
| Order No. | 0430900000 | Miniature fuse, quick-acting, 2 A, G-Si. 5 x 20 |
| GTIN (EAN) | 4008190123567 | |
| Qty. | 10 ST | |

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

Coding elements



The pluggable connections for power electronics - optimised for modern drive technologies, e.g. motor starters, frequency converters and servo-controllers. OMNIMATE Power sets the new standard - with increased safety and innovative solutions such as the pluggable shield, integrated signal contacts and one-handed operation.

The three product lines offer you further advantages:

- Application-oriented scalability: from the compact 4 mm² connector for 29 A (IEC) or 20 A (UL) up to the sturdy 16 mm² connector for 76 A (IEC) or 54 A (UL)
- Unlimited usage up to 1,000 V (IEC) or 600 V (UL)
- A variety of application optimised mounting options

Our service:

Design your individual connectors simply by using the product configurator.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | VDS180 SV7.62 | Version |
| Order No. | 1853940000 | PCB plug-in connector, Accessories, black, Number of poles: 1 |
| GTIN (EAN) | 4032248389513 | |
| Qty. | 50 ST | |

End bracket



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

| | | |
|------------|----------------------------|-----------------------|
| Type | AEB 35 SC/1 | Version |
| Order No. | 1991920000 | A-series, End bracket |
| GTIN (EAN) | 4050118376722 | |
| Qty. | 50 ST | |

Marker holder



The marker holder offer the possibility of additional mounting of standard markers with a pitch of 5 or 5.1 mm. The angled holders can be optionally shaped together and could be mounted in all standard marking channels of the Klippon® Connect modular terminal blocks. Fitting marker types could be found under the respective accessories of the designation marking holder.

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

General ordering data

| | | |
|------------|----------------------------|----------------------------|
| Type | BZT 1 WS 10/5 | Version |
| Order No. | 1805490000 | Accessories, Marker holder |
| GTIN (EAN) | 4032248270231 | |
| Qty. | 100 ST | |
| Type | BZT 1 ZA WS 10/5 | Version |
| Order No. | 1805520000 | Accessories, Marker holder |
| GTIN (EAN) | 4032248270248 | |
| Qty. | 100 ST | |

End plates and partition plates



Partition plates and end plates are essential accessories for terminal blocks. Partition plates provide optical and electrical separation of different potentials and functional groups, increasing safety and ensuring a clear structure inside the control cabinet. End plates close the terminal block row on the sides, protect against contact with live parts, and ensure a clean, stable finish. Both components are precisely matched to the respective Weidmüller terminal block series, contributing to safe, compliant, and professional wiring.

General ordering data

| | | |
|------------|----------------------------|---------------------------|
| Type | APP 2 | Version |
| Order No. | 2489090000 | A-series, Partition plate |
| GTIN (EAN) | 4050118499308 | |
| Qty. | 50 ST | |

Warning cover



Warning covers with a flash symbol provide more safety for man and machine. They are used where external voltage must be indicated within the application.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | AAM 4 YE FLASH | Version |
| Order No. | 2635560000 | A-series, Terminal marker, 10 x 6.1 mm, Pitch in mm (P): 6.00 yellow |
| GTIN (EAN) | 4050118674507 | |
| Qty. | 40 ST | |

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

End bracket



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

| | | |
|------------|----------------------------|---------------------------------|
| Type | AEB 35 SCL/1 VO | Version |
| Order No. | 2661280000 | A-series, End bracket |
| GTIN (EAN) | 4050118702163 | |
| Qty. | 20 ST | |
| Type | AEB 35 SCL/1 VO BK | Version |
| Order No. | 2661300000 | A-series, End bracket |
| GTIN (EAN) | 4050118702187 | |
| Qty. | 20 ST | |
| Type | AEB 35 SCL/1 VO GY | Version |
| Order No. | 2661290000 | A-series, End bracket |
| GTIN (EAN) | 4050118702170 | |
| Qty. | 20 ST | |
| Type | ZST 1 | Version |
| Order No. | 1269070000 | Accessories, Accessories holder |
| GTIN (EAN) | 4050118094091 | |
| Qty. | 25 ST | |

Slotted screwdriver



VDE insulated screwdriver sets, for working on live parts up to 1000 V AC and 1500 V DC, DIN EN 60900. IEC 900. Each piece is "GS" safety tested. Blade made from fully hardened, high-alloy chromium-vanadium-molybdenum steel, gun-metal finish.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | SDIS SLIM 0.6X3.5X100 | Version |
| Order No. | 2749610000 | Mounting tool, Blade width (B): 3.5 mm, Blade length: 100 mm, Blade |
| GTIN (EAN) | 4050118896350 | thickness (A): 0.6 mm |
| Qty. | 1 ST | |

AFS 4 2C 100-250V BK

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

Cross-connections



The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

General ordering data

| | | |
|------------|----------------------------|------------|
| Type | VH 20/5/3.4 | Version |
| Order No. | 0446100000 | Dummy fuse |
| GTIN (EAN) | 4008190519742 | |
| Qty. | 10 ST | |

Testadapter and testsockets



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | FZS 2/4 RT/80 SAKT4 | Version |
| Order No. | 1276300000 | Plug (terminal), Plug-in connection, 2 mm ² , Number of connections: 2, |
| GTIN (EAN) | 4008190026080 | Number of poles: 1, Width: 9 mm |
| Qty. | 20 ST | |