

VPU PV I+II 3 R 1000 E


Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Product image



Similar to illustration

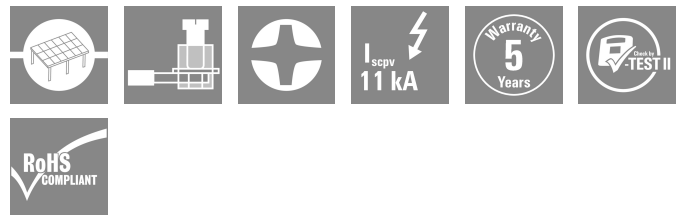

General ordering data

Version	Surge voltage arrester, Low voltage, Surge protection I / II, with remote contact
Order No.	2530190000
Type	VPU PV I+II 3 R 1000 E
GTIN (EAN)	4050118540505
Qty.	1 items

VPU PV I+II 3 R 1000 E

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS Conform

Dimensions and weights

Depth	70 mm	Depth (inches)	2.7559 inch
Height	104.5 mm	Height (inches)	4.1142 inch
Width	54 mm	Width (inches)	2.126 inch
Mounting dimension - height	75 mm	Net weight	447 g

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
Humidity	5 - 95% rel. humidity		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Connection data, remote alert

Cross-section for connected wire, solid core, min.	0.25 mm ²	Stripping length	12 mm
Connection type	PUSH IN	Cross-section for connected wire, solid core, max.	1.5 mm ²

General data

Optical function display	green = OK; red = arrester is defective - replace	Version	Surge protection I / II, with remote contact
Design	Installation housing; 3TE, Insta IP 20	UL 94 flammability rating	V-0
Colour	black, orange	Protection degree	IP20
Mounting rail	TS 35	Operating altitude	≤ 4000 m

Insulation coordination acc. to EN 50178

Surge voltage category	III	Pollution severity	2
------------------------	-----	--------------------	---

Photovoltaic technical data

Standards	EN 61643-31, EN 50539-11	Lightning test current Iimp (10/350 μs)	6.25 kA
Protection level Up (+/-, -/PE, +/-PE)	≤ 3.8 kV	Operating height in ungrounded PV system	≤ 4000 m
Short-circuit current ISCP	11000 A	Total discharge current Itotal (8/20 μs)	50 kA
Discharge current In (8/20 μs)	20 kA	Requirements class	Type I/II
Operating height in the grounded PV system	≤ 2000 m	Total discharge current Itotal (10/350 μs)	6.25 kA
PV system voltage, max. Ucpv	1100 V		

VPU PV I+II 3 R 1000 E

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Rated data IEC / EN

Number of poles	3	Leakage current at Un	30 µA
Signalling contact	250 V 1A 1CO	Rated voltage (DC)	1000 V
Voltage type	DC	Response time / fallback time	≤ 25 ns
Standards	EN 61643-31, EN 50539-11	Lightning test current limp (10/350 µs)	6.25 kA
Max. continuous voltage, Uc (DC)	1000 V	Energy coordination (≤10 m)	Type I, Type II, Type III
Discharge current I _{max} (8/20µs) wire-PE40 kA		SPD type	T1, T2
Integrated back-up fuse	No		

Connection data

Stripping length	18 mm	Type of connection	Screw connection
Stripping length, rated connection	18 mm	Tightening torque, min.	3 Nm
Tightening torque, max.	4.5 Nm	Clamping range, rated connection	6 mm ²
Clamping range, min.	1.5 mm ²	Clamping range, max.	35 mm ²
Wire cross-section, solid, min.	1.5 mm ²	Wire cross-section, solid, max.	35 mm ²
Wire connection cross section, finely stranded, min.	1.5 mm ²	Wire connection cross section, finely stranded, max.	35 mm ²
Connection cross-section, stranded, min. 1.5 mm ²		Connection cross-section, stranded, max.	35 mm ²

Electrical data

Voltage type	DC
--------------	----

General data

Number of poles	3	Protection degree	IP20
Colour	black, orange		

Guarantee

Time interval	5 years
---------------	---------

Classifications

ETIM 8.0	EC001457	ETIM 9.0	EC001457
ETIM 10.0	EC001457	ECLASS 14.0	27-17-14-03
ECLASS 15.0	27-17-14-03		

Electric symbol



Circuit diagram