


**SQB 3/3**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

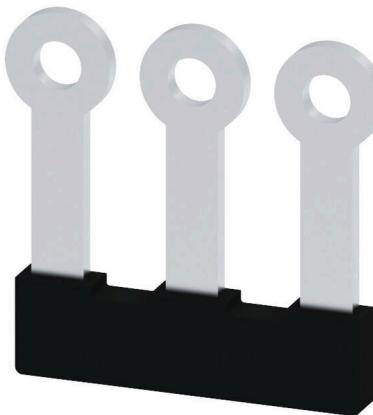

The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

**General ordering data**

Version	Cross-connector (terminal), when screwed in, black, 41 A, Number of poles: 3, Pitch in mm (P): 9.00, Insulated: Yes, Width: 23.1 mm
Order No.	<a href="#">2615120000</a>
Type	SQB 3/3
GTIN (EAN)	4050118653861
Qty.	50 items

**Technical data****Approvals**

RoHS	Conform
------	---------

**Dimensions and weights**

Depth	2.8 mm	Depth (inches)	0.1102 inch
Height	24 mm	Height (inches)	0.9449 inch
Width	23.1 mm	Width (inches)	0.9094 inch
Net weight	3.04 g		

**Temperatures**

Storage temperature	-25 °C...55 °C	Ambient temperature	-5 °C...40 °C
---------------------	----------------	---------------------	---------------

**Environmental Product Compliance**

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

**Material data**

Basic material	Wemid, PA	Colour	black
UL 94 flammability rating	V-2		

**System specifications**

Version	Cross-connector
---------	-----------------

**Additional technical data**

Type of fixing	when screwed in	Explosion-tested version	No
Type of mounting	when screwed in		

**Dimensions**

Pitch in mm (P)	9.00 mm
-----------------	---------

**General**

Number of poles	3
-----------------	---

**Rating data**

Rated voltage	400 V	Nominal current	41 A
---------------	-------	-----------------	------

**Classifications**

ETIM 8.0	EC000489	ETIM 9.0	EC000489
ETIM 10.0	EC000489	ECLASS 14.0	27-25-03-03
ECLASS 15.0	27-25-03-03		