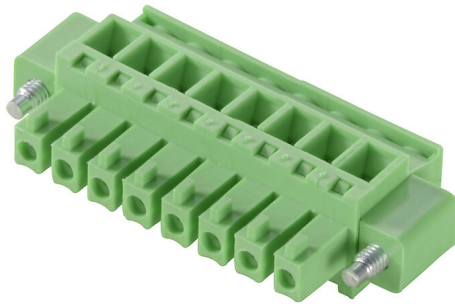


**CPS 3.81/07/90F SN GN BX****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**General ordering data**

|              |                                                                                   |
|--------------|-----------------------------------------------------------------------------------|
| Order No.    | 2642520000                                                                        |
| Type         | <a href="#">CPS 3.81/07/90F SN GN BX</a>                                          |
| GTIN (EAN)   | 4050118644456                                                                     |
| Qty.         | 108 items                                                                         |
| Product data | IEC: 320 V / 8 A / 0.2 - 1.5 mm <sup>2</sup><br>UL: 300 V / 8 A / AWG 30 - AWG 16 |
| Packaging    | Box                                                                               |

## CPS 3.81/07/90F SN GN BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

## Approvals

Approvals



ROHS Conform

UL File Number Search [UL Website](#)

Certificate No. (cURus) E60693

## Dimensions and weights

Net weight 6.33 g

## Environmental Product Compliance

RoHS Compliance Status Compliant with exemption

RoHS Exemption (if applicable/known) 6c

REACH SVHC Lead 7439-92-1

SCIP d5655e4a-7bb0-47c8-bd67-25d5021f9ded

## System Parameters

| Product family           | OMNIMATE basic – Series CPS | Type of connection         | Field connection |
|--------------------------|-----------------------------|----------------------------|------------------|
| Wire connection method   | Clamping yoke connection    | Pitch in mm (P)            | 3.81 mm          |
| Pitch in inches (P)      | 0.150 "                     | Conductor outlet direction | 90°              |
| Number of poles          | 7                           | L1 in mm                   | 22.86 mm         |
| L1 in inches             | 0.900 "                     | Number of rows             | 1                |
| Pin series quantity      | 1                           | Stripping length           | 6.5 mm           |
| Tightening torque, min.  | 0.22 Nm                     | Tightening torque, max.    | 0.25 Nm          |
| Clamping screw           | M 2                         | Screwdriver blade          | 0.4 x 2.5        |
| Plugging cycles          | 25                          | Plugging force/pole, max.  | 12 N             |
| Pulling force/pole, max. | 12 N                        |                            |                  |

## Material data

|                             |              |                             |              |
|-----------------------------|--------------|-----------------------------|--------------|
| Insulating material         | PA           | Colour                      | Pale green   |
| Colour chart (similar)      | RAL 6021     | Insulating material group   | I            |
| Moisture Level (MSL)        |              | UL 94 flammability rating   | V-0          |
| Contact base material       | Copper alloy | Contact material            | Copper alloy |
| Contact surface             | tinned       | Tinning type                | matt         |
| Storage temperature, min.   | -40 °C       | Storage temperature, max.   | 70 °C        |
| Operating temperature, min. | -40 °C       | Operating temperature, max. | 105 °C       |

## Conductors suitable for connection

|                                                                     |                      |                                                                      |                     |
|---------------------------------------------------------------------|----------------------|----------------------------------------------------------------------|---------------------|
| Clamping range, min.                                                | 0.2 mm <sup>2</sup>  | Clamping range, max.                                                 | 1.5 mm <sup>2</sup> |
| Wire connection cross section AWG, min.                             | AWG 30               | Wire connection cross section AWG, max.                              | AWG 16              |
| Solid, min. H05(07) V-U                                             | 0.2 mm <sup>2</sup>  | Solid, max. H05(07) V-U                                              | 1.5 mm <sup>2</sup> |
| Stranded, min. H07V-R                                               | 0.05 mm <sup>2</sup> | Stranded, max. H07V-R                                                | 1.5 mm <sup>2</sup> |
| Flexible, min. H05(07) V-K                                          | 0.2 mm <sup>2</sup>  | Flexible, max. H05(07) V-K                                           | 1 mm <sup>2</sup>   |
| w. plastic collar ferrule, DIN 46228 pt 4, 0.2 mm <sup>2</sup> min. |                      | w. plastic collar ferrule, DIN 46228 pt 4, 0.75 mm <sup>2</sup> max. |                     |
| w. wire end ferrule, DIN 46228 pt 1, 0.2 mm <sup>2</sup> min.       |                      | w. wire end ferrule, DIN 46228 pt 1, 0.75 mm <sup>2</sup> max.       |                     |

## CPS 3.81/07/90F SN GN BX

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Rated data acc. to IEC

|                                                                           |        |                                                                       |        |
|---------------------------------------------------------------------------|--------|-----------------------------------------------------------------------|--------|
| Rated current, min. number of poles (Tu=20°C)                             | 8 A    | Rated voltage for surge voltage class / pollution degree II/2         | 320 V  |
| Rated voltage for surge voltage class / pollution degree III/2            | 160 V  | Rated voltage for surge voltage class / pollution degree III/3        | 160 V  |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 2.5 kV | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 2.5 kV |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 2.5 kV |                                                                       |        |

## Rated data acc. to CSA

|                                   |        |                                   |        |
|-----------------------------------|--------|-----------------------------------|--------|
| Rated voltage (Use group B / CSA) | 300 V  | Rated current (Use group B / CSA) | 8 A    |
| Wire cross-section, AWG, min.     | AWG 30 | Wire cross-section, AWG, max.     | AWG 16 |

## Rated data acc. to UL 1059

|                                       |                                                                        |                                       |        |
|---------------------------------------|------------------------------------------------------------------------|---------------------------------------|--------|
| Institute (cURus)                     | CURUS                                                                  | Certificate No. (cURus)               | E60693 |
| Rated voltage (Use group B / UL 1059) | 300 V                                                                  | Rated current (Use group B / UL 1059) | 8 A    |
| Wire cross-section, AWG, min.         | AWG 30                                                                 | Wire cross-section, AWG, max.         | AWG 16 |
| Reference to approval values          | Specifications are maximum values, details - see approval certificate. |                                       |        |

## Packing


|           |           |            |           |
|-----------|-----------|------------|-----------|
| Packaging | Box       | VPE length | 338.00 mm |
| VPE width | 130.00 mm | VPE height | 27.00 mm  |

## Important note


|       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes | <ul style="list-style-type: none"> <li>• Only compatible with OMNIMATE basic products</li> <li>• P on drawing = pitch</li> <li>• Rated current related to rated cross-section &amp; min. No. of poles.</li> <li>• Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.</li> <li>• In accordance with IEC 61984, OMNIMATE-connectors are connectors without breaking capacity (COC). During designated use, connectors are not allowed to be engaged or disengaged when live or under load</li> <li>• Long term storage of the product with average temperature of 50 °C and maximum humidity 70%, 36 months</li> </ul> |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Classifications


|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 8.0    | EC002638    | ETIM 9.0    | EC002638    |
| ETIM 10.0   | EC002638    | ECLASS 14.0 | 27-46-02-02 |
| ECLASS 15.0 | 27-46-02-02 |             |             |

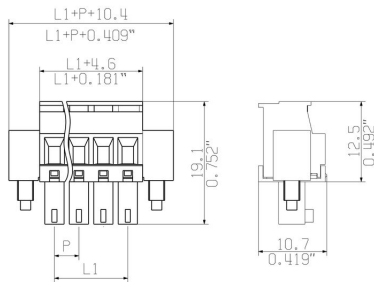


CPS 3.81/./90 - CH 3.81/./90G

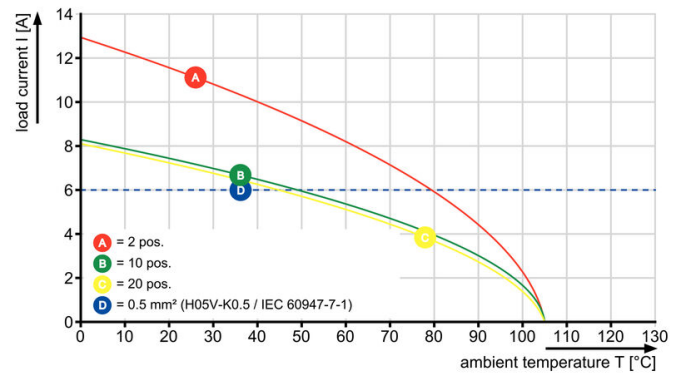

CPS 3.81/./90 - CH 3.81/./90G

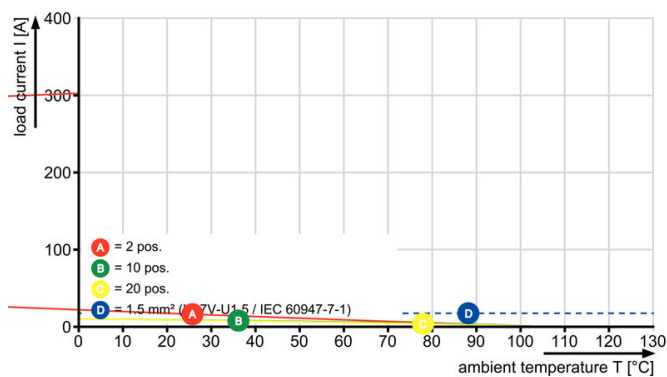

CPS 3.81/./90 - CH 3.81/./180G

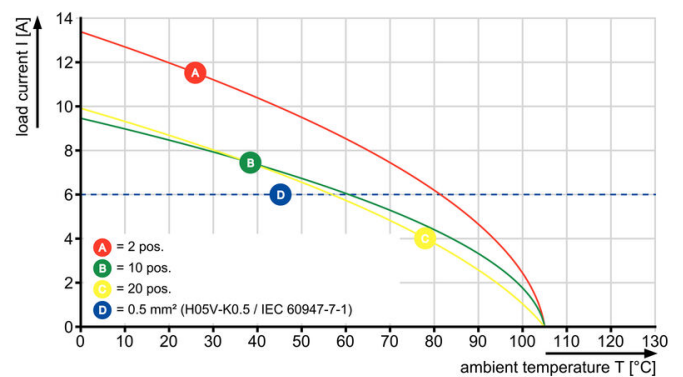

CPS 3.81/./90 - CH 3.81/./180G

