

**AMC 2.5 800V DL****Weidmüller Interface GmbH & Co. KG**Klingenbergsstraße 26  
D-32758 Detmold  
Germany[www.weidmueller.com](http://www.weidmueller.com)

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

**General ordering data**

Version	Motor-connection terminal (Multi-level), PUSH IN, dark beige, 2.5 mm <sup>2</sup> , 22 A, 800 V, Number of connections: 7, Number of levels: 4, TS 35, V-0, Wemid
Order No.	<a href="#">2742050000</a>
Type	AMC 2.5 800V DL
GTIN (EAN)	4064675002345
Qty.	50 items

## AMC 2.5 800V DL

Weidmüller Interface GmbH & Co. KG  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

## Approvals

Approvals



CURUSEX

IECEx



ATEX



ROHS	Conform
UL File Number Search	<a href="#">UL Website</a>
Certificate No. (cURusEX)	E184763

## Dimensions and weights

Depth	88 mm
Height	107.5 mm
Width	6.1 mm
Net weight	34 g

Depth (inches)	3.4646 inch
Height (inches)	4.2323 inch
Width (inches)	0.2402 inch

## Temperatures

Storage temperature	-25 °C...55 °C
Continuous operating temp., min.	-60 °C

Ambient temperature	-60 °C...85 °C
Continuous operating temp., max.	130 °C

## Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

## Material data

Basic material	Wemid		
Colour of operational elements	orange	Colour	dark beige

UL 94 flammability rating	V-0
---------------------------	-----

## Rating data IECEx/ATEX

Certificate No. (ATEX)	TUEV16ATEX7909U		
Max. voltage (ATEX)	440 V		
Wire cross section max. (ATEX)	2.5 mm <sup>2</sup>		
Current (IECEx)	19 A		
Certificate No. (IECEx)	IECEx TUR16.0036U	Current (ATEX)	19 A
Max. voltage (IECEx)	440 V		
Wire cross section max. (IECEx)	2.5 mm <sup>2</sup>		

## System specifications

End cover plate required	No
Number of levels	4
Levels cross-connected internally	No
N-function	No
PEN function	No

Number of potentials	4
Number of clamping points per level	2
Mounting rail	TS 35
PE function	Yes

## Additional technical data

Type of fixing	TS 35
Type of mounting	Snap-on

## AMC 2.5 800V DL

Weidmüller Interface GmbH & Co. KG  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

## Conductors for clamping (rated connection)

Wire connection cross section AWG, AWG 14  
max.

Connection direction top

Stripping length 10 mm

Type of connection PUSH IN

Number of connections 7

Wire connection cross section AWG, AWG 20  
min.

Wire connection cross-section, finely  
stranded with wire-end ferrules DIN  
46228/4, max.

Wire connection cross-section, finely  
stranded with wire-end ferrules DIN  
46228/4, min.

Wire connection cross-section, finely  
stranded with wire-end ferrules DIN  
46228/1, max.

Wire connection cross-section, finely  
stranded with wire-end ferrules DIN  
46228/1, min.

Wire connection cross section, finely  
stranded, max.

Wire connection cross section, finely  
stranded, min.

Connection cross-section, stranded,  
max.

Connection cross-section, stranded, min. 0.5 mm<sup>2</sup>

Wire connection cross-section, solid 2.5 mm<sup>2</sup>  
core, max.

Wire connection cross-section, solid 0.5 mm<sup>2</sup>  
core, min.

Tube length for wire-end ferrule without plastic collar DIN 46228/1	Tube length	nominal	5 mm
	Cross-section for conductor connection	nominal	0.25 mm <sup>2</sup>
	Tube length	min.	6 mm
		max.	10 mm
	Cross-section for conductor connection	min.	0.5 mm <sup>2</sup>
		max.	1 mm <sup>2</sup>
	Tube length	min.	7 mm
		max.	12 mm
	Cross-section for conductor connection	min.	1.5 mm <sup>2</sup>
		max.	4 mm <sup>2</sup>

## General

Wire connection cross section AWG, AWG 14  
max.

Mounting rail TS 35

Wire connection cross section AWG, AWG 20  
min.

## Rating data

Rated cross-section 2.5 mm<sup>2</sup>

Rated DC voltage 800 V

Current at maximum wires 22 A

Surge voltage category III

Rated voltage 800 V

Nominal current 22 A

Volume resistance according to IEC  
60947-7-x 1.33 mΩ

Pollution severity 3

**AMC 2.5 800V DL**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)



**Technical data****Classifications**

ETIM 8.0	EC000897	ETIM 9.0	EC000897
ETIM 10.0	EC000897	ECLASS 14.0	27-25-01-02
ECLASS 15.0	27-25-01-02		

**AMC 2.5 800V DL**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

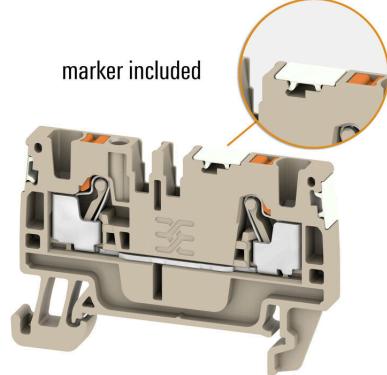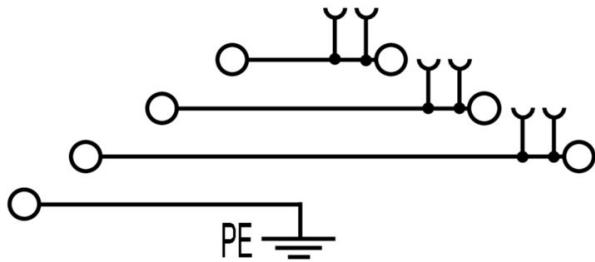**Drawings**


## AMC 2.5 800V DL

Weidmüller Interface GmbH & Co. KG  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

## End bracket

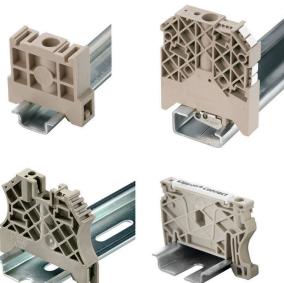

Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

Type	AEB 35 SC/1	Version
Order No.	<a href="#">1991920000</a>	A-series, End bracket
GTIN (EAN)	4050118376722	
Qty.	50 ST	

## Additional accessories



No task is too small when creating the perfect solution. Connections form just one part of the overall process. Small details are often the key to the perfect solution in applications where potentials are tested, grouped or even isolated.

A system is not a system without small but essential details:

- Test plugs ensure reliable pick-up from diagnostic sockets

In tandem with the manufacturing process and application.

## General ordering data

Type	PS 2.0 MC	Version
Order No.	<a href="#">0310000000</a>	PCB plug-in connector, Accessories, Test plug, red, Number of poles:
GTIN (EAN)	4008190000059	1
Qty.	20 ST	

## Accessories



Accessories for testing and measuring equipment

## AMC 2.5 800V DL

Weidmüller Interface GmbH & Co. KG  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany


[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

## General ordering data

Type	ZUB MULTIMETER	Version
Order No.	<a href="#">9205270000</a>	Multimeter
GTIN (EAN)	4032248723522	
Qty.	1 ST	

## SnapMark



SnapMark - this tag carrier has been developed specifically for the I-series double-level terminal IDK 1.5N. The flexible pivot mechanism allows cross-connections to be easily installed or removed. It can hold four DEK 5 labelling tags or two WS 10/5 Middle connector markers.

## General ordering data

Type	SNAPMARK I	Version
Order No.	<a href="#">1805880000</a>	Group markers, Terminal marker, 23 x 5 mm, Pitch in mm (P): 5.00
GTIN (EAN)	4032248273614	Weidmüller, white
Qty.	50 ST	

## Cross-connections



The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

## General ordering data

Type	ZVQ 2.5/1.5	Version
Order No.	<a href="#">1720700000</a>	Accessories, Cross-connector, 24 A
GTIN (EAN)	4008190374006	
Qty.	50 ST	

## AMC 2.5 800V DL

Weidmüller Interface GmbH & Co. KG  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

## Testadapter and testsockets



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

## General ordering data

Type	ATPG 1.5-10 L	Version
Order No.	<a href="#">1991890000</a>	Test adapter (terminal), 1.5 mm <sup>2</sup> , 250 V, 0.2 A
GTIN (EAN)	4050118376647	
Qty.	50 ST	
Type	ATPG 4 MI-R	Version
Order No.	<a href="#">1991860000</a>	Test adapter (terminal), 1.5 mm <sup>2</sup> , 250 V, 0.2 A
GTIN (EAN)	4050118376661	
Qty.	50 ST	

## End bracket



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

Type	AEB 35 SC/1 BK	Version
Order No.	<a href="#">2475310000</a>	A-series, End bracket
GTIN (EAN)	4050118487114	
Qty.	50 ST	

## Marker holder



The marker holder offer the possibility of additional mounting of standard markers with a pitch of 5 or 5.1 mm. The angled holders can be optionally snapped together and could be mounted in all standard marking channels of the Klippon® Connect modular terminal blocks. Fitting marker types could be found under the respective accessories of the designation marking holder.

## AMC 2.5 800V DL

Weidmüller Interface GmbH & Co. KG  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany


[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

## General ordering data

Type	BZT 1 WS 10/5	Version
Order No.	<a href="#">1805490000</a>	Accessories, Marker holder
GTIN (EAN)	4032248270231	
Qty.	100 ST	
Type	BZT 1 ZA WS 10/5	Version
Order No.	<a href="#">1805520000</a>	Accessories, Marker holder
GTIN (EAN)	4032248270248	
Qty.	100 ST	

## Warning cover

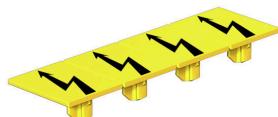

Warning covers with a flash symbol provide more safety for man and machine. They are used where external voltage must be indicated within the application.

## General ordering data

Type	AAM 2.5 YE FLASH	Version
Order No.	<a href="#">2635550000</a>	A-series, Terminal marker, 8 x 5.1 mm, Pitch in mm (P): 5.00 yellow
GTIN (EAN)	4050118674095	
Qty.	40 ST	

## End bracket



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

Type	AEB 35 SCL/1 VO	Version
Order No.	<a href="#">2661280000</a>	A-series, End bracket
GTIN (EAN)	4050118702163	
Qty.	20 ST	
Type	AEB 35 SCL/1 VO BK	Version
Order No.	<a href="#">2661300000</a>	A-series, End bracket
GTIN (EAN)	4050118702187	
Qty.	20 ST	
Type	AEB 35 SCL/1 VO GY	Version
Order No.	<a href="#">2661290000</a>	A-series, End bracket
GTIN (EAN)	4050118702170	
Qty.	20 ST	


## AMC 2.5 800V DL

Weidmüller Interface GmbH & Co. KG  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

## Slotted screwdriver

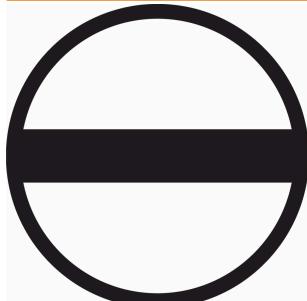

VDE insulated screwdriver sets, for working on live parts up to 1000 V AC and 1500 V DC, DIN EN 60900. IEC 900. Each piece is "GS" safety tested. Blade made from fully hardened, high-alloy chromium-vanadium-molybdenum steel, gun-metal finish.

## General ordering data

Type SDIS SLIM 0.6X3.5X100

Order No. [2749610000](#)

GTIN (EAN) 4050118896350

Qty. 1 ST

Version

Mounting tool, Blade width (B): 3.5 mm, Blade length: 100 mm, Blade thickness (A): 0.6 mm

## Testadapter and testsockets



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

## General ordering data

Type FZS 2/4 RT/80 SAKT4

Order No. [1276300000](#)

GTIN (EAN) 4008190026080

Qty. 20 ST

Version

Plug (terminal), Plug-in connection, 2 mm<sup>2</sup>, Number of connections: 2, Number of poles: 1, Width: 9 mm