


HDC MEMC 2 MC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

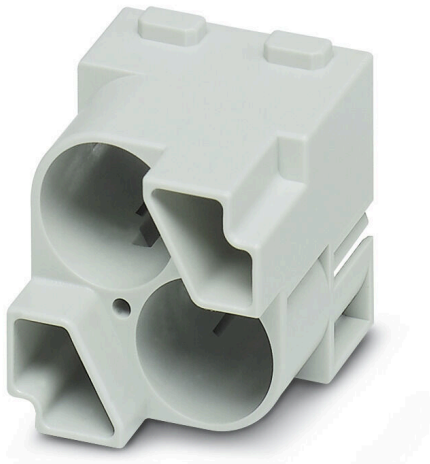

Flexible

The four module sizes make for individual plug solutions that save a huge amount of space. The smaller pitch translates into an optimised design too.

General ordering data

Version	Data module, 50 V, 10 A, Number of poles: 2, Crimp connection, Male, Required plug-in slots: 2
Order No.	2748560000
Type	HDC MEMC 2 MC
GTIN (EAN)	4050118890730
Qty.	2 items

HDC MEMC 2 MC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS Conform

UL File Number Search [UL Website](#)

Certificate No. (UR) E92202

Dimensions and weights

Depth	34 mm	Depth (inches)	1.3386 inch
Height	34 mm	Height (inches)	1.3386 inch
Width	34.2 mm	Width (inches)	1.3465 inch
Net weight	7.1 g		

Temperatures

Limit temperature -40 °C ... 125 °C

Environmental Product Compliance

RoHS Compliance Status Compliant without exemption

REACH SVHC No SVHC above 0.1 wt%

General data

Number of poles	2	UL 94 flammability rating	V-0
Plugging cycles	≥ 500	Type	Male
Surge voltage category	III	Pollution severity	3
Basic material	Polycarbonate	Series	ModuPlug
Rated voltage (DIN EN 61984)	50 V	Rated impulse voltage (DIN EN 61984)	0.8 kV
Rated current (DIN EN 61984)	10 A	Required plug-in slots	2

PE connection data

Connection type PE Screw connection via module frame

Version

Type of connection	Crimp connection	Conductor cross-section, max.	2.5 mm ²
Conductor cross-section, min.	0.14 mm ²		

Classifications

ETIM 8.0	EC000438	ETIM 9.0	EC000438
ETIM 10.0	EC000438	ECLASS 14.0	27-44-02-17
ECLASS 15.0	27-44-02-17		

HDC MEMC 2 MC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

Drawings

www.weidmueller.com

