

VPU AC II F 3+1 300/40

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Product image



Abb.ähnlich

Weidmüller VPU I (Type I), VPU II (Type II) and VPU III (Type III) surge protection products effectively reduce the interference coupling that can occur due to transient surge voltages, even significantly below the limits prescribed by insulation co-ordination according to EN 60664-3 / DIN VDE 0110-3. This means that the whole installation is exposed to fewer malfunctions. The arresters are co-ordinated using technical means. This means that decoupling between Types I, II and III is unnecessary. The arresters are tested according to product standard IEC 61643-11 / DIN EN 61643-11 and can be installed in systems according to IEC 61643-12 / VDE 0675-6-12 and IEC 62305-4 / VDE 0185-4. This lightning and surge protection device is suited for installation in power supply systems. Weidmüller offers different products depending on the particular mains network type and voltage level. The VPU AC II F series is characterised by a fuse integrated in the arrester. These arresters do not require a fuse.

General ordering data

| | |
|------------|---|
| Version | Surge voltage arrester, Low voltage, Class II surge protection, no leakage current, TN-C-S, TN-S, TT, IT with N, IT without N |
| Order No. | 2827630000 |
| Type | VPU AC II F 3+1 300/40 |
| GTIN (EAN) | 4064675366621 |
| Qty. | 1 items |

VPU AC II F 3+1 300/40

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS Conform

Dimensions and weights

| | | | |
|--------------------------|-------------|----------------|-------------|
| Depth | 68 mm | Depth (inches) | 2.6772 inch |
| Depth including DIN rail | 76 mm | Height | 90 mm |
| Height (inches) | 3.5433 inch | Width | 72 mm |
| Width (inches) | 2.8346 inch | Net weight | 468 g |

Temperatures

| | | | |
|-----------------------|----------------|---------------------|-----------------------|
| Storage temperature | -40 °C...85 °C | Ambient temperature | -40 °C...85 °C |
| Operating temperature | -40 °C...85 °C | Humidity | 5 - 95% rel. humidity |

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC | No SVHC above 0.1 wt% |

Connection data, remote alert

| | | | |
|--|----------------------|-----------------|---------|
| Cross-section for connected wire, solid core, min. | 0.25 mm ² | Connection type | PUSH IN |
| Cross-section for connected wire, solid core, max. | 1.5 mm ² | | |

General data

| | | | |
|---------------------------|---|--------------------|--|
| Optical function display | green = OK; red = arrester is defective - replace | Segment | Power distribution |
| Version | Class II surge protection, no leakage current | Design | Installation housing; 4TE, Insta IP 20 |
| UL 94 flammability rating | V-0 | Colour | orange, black, Light Blue |
| Protection degree | IP20 in installed state | Mounting rail | TS 35 |
| Acoustic signal | No | Operating altitude | ≤ 4000 m |

Insulation coordination acc. to EN 50178

| | | | |
|------------------------|-----|--------------------|---|
| Surge voltage category | III | Pollution severity | 2 |
|------------------------|-----|--------------------|---|

Rated data IEC / EN

| | | | |
|--|----------|-----------------------|--|
| Number of poles | 1 | Combined pulse UOC | 6 kV |
| Leakage current at Un | 5 µA | Signalling contact | No, 250 V 1A 1CO |
| Rated voltage (AC) | 230 V | Low voltage network | TN-C-S, TN-S, TT, IT with N, IT without N |
| Protection level Up at IN (N-PE) | ≤ 1.5 kV | Voltage type | AC |
| Temporary surge voltage (over-voltage) - TOV | 337 V | Fuse protection | Not required, internally available, No Fuse necessary ≤ 315 A gG |
| Response time / fallback time | ≤ 25 ns | Frequency range, max. | 60 Hz |

VPU AC II F 3+1 300/40

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

| | | | |
|---|---|---|---------------------------|
| Frequency range, min. | 50 Hz | Standards | IEC 61643-11, EN 61643-11 |
| Requirements class, acc. to EN 61643-11 | T2, T3 | Requirements category acc. to IEC 61643-11 | Type II, Type III |
| Max. continuous voltage, U_c (AC) | 300 V | Max. continuous voltage, U_c (N-PE) | 305 V |
| Mains voltage | 230 V / 400 V | Discharge current I_{max} (8/20 μ s) N-PE | 65 kA |
| Discharge current I_n (8/20 μ s) N-PE | 40 kA | Energy coordination (≤ 10 m) | Type II, Type III |
| Discharge current I_n (8/20 μ s) wire-PE | 20 kA | Acoustic signal | No |
| Discharge current I_{max} (8/20 μ s) wire-PE | 40 kA | SPD type | T2, T3 |
| Protection level Up at I_n (L/N-PE) | ≤ 1500 V | Short-circuit current rating ISCCR | 100 kA |
| Follow-on current extinguishing capability I_{fi} | Follow current need not be taken into account | Integrated back-up fuse | Yes |

Connection data

| | | | |
|--|--------------------|--|---------------------|
| Stripping length | 18 mm | Wire connection method | Screw connection |
| Type of connection | Screw connection | Stripping length, rated connection | 18 mm |
| Tightening torque, min. | 3 Nm | Tightening torque, max. | 4.5 Nm |
| Clamping range, rated connection | 16 mm ² | Clamping range, min. | 1.5 mm ² |
| Clamping range, max. | 35 mm ² | Wire connection cross section AWG, min. | AWG 16 |
| Wire connection cross section AWG, max. | AWG 2 | Wire cross-section, solid, min. | 1.5 mm ² |
| Wire cross-section, solid, max. | 35 mm ² | Wire connection cross section, finely stranded, min. | 1.5 mm ² |
| Wire connection cross section, finely stranded, max. | 25 mm ² | Conductor cross-section, flexible, AEH (DIN 46228-1), min. | 2.5 mm ² |
| Conductor cross-section, flexible, AEH (DIN 46228-1), max. | 25 mm ² | Connection cross-section, stranded, min. | 1.5 mm ² |
| Connection cross-section, stranded, max. | 35 mm ² | | |

Electrical data

| | |
|--------------|----|
| Voltage type | AC |
|--------------|----|

General data

| | | | |
|-----------------|---------------------------|-------------------|-------------------------|
| Number of poles | 1 | Protection degree | IP20 in installed state |
| Colour | orange, black, Light Blue | | |

Guarantee

| | |
|---------------|---------|
| Time interval | 5 years |
|---------------|---------|

Important note


| | |
|---------------------|---|
| Product information | If $F1 > 63A$ gG, then the integrated backup fuse always operates before F1 |
|---------------------|---|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 8.0 | EC000941 | ETIM 9.0 | EC000941 |
| ETIM 10.0 | EC000941 | ECLASS 14.0 | 27-17-12-02 |
| ECLASS 15.0 | 27-17-12-02 | | |

Drawings

Electric symbol

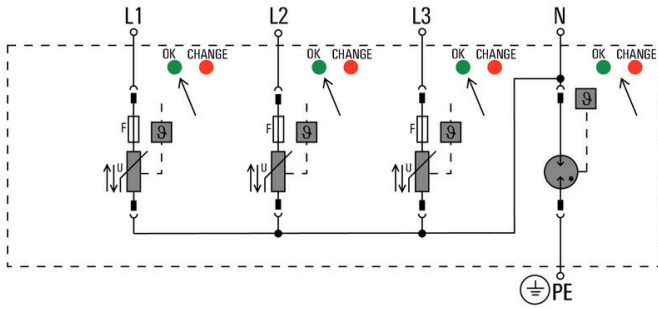

Schematic circuit diagram

VPU AC II F 3+1 300/40

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Crosshead screwdriver Phillips



VDE insulated crosshead screwdriver, for Phillips screws, SDIK PH DIN 7438, ISO 8764/2-PH, output to ISO 8764-PH, SoftFinish grip

General ordering data

| | | | |
|------------|----------------------------|---|--|
| Type | SDIK PH1 X 80 | Version | |
| Order No. | 2749890000 | Screwdriver, Blade width (B): 1 mm, 80 mm, Blade thickness (A): 1 | |
| GTIN (EAN) | 4050118897098 | | |
| Qty. | 1 ST | | |

Slotted screwdriver




VDE insulated slot-head screwdriver, SDI DIN 7437, ISO 2380/2, drive output acc. to DIN 5264, ISO 2380/1. SoftFinish grip

General ordering data

| | | | |
|------------|----------------------------|---|--|
| Type | SDIS 1.0X5.5X125 | Version | |
| Order No. | 2749850000 | Screwdriver, Blade width (B): 5.5 mm, Blade length: 125 mm, Blade thickness (A): 1 mm | |
| GTIN (EAN) | 4050118897050 | | |
| Qty. | 1 ST | | |

Blank



ESG is the tried-and-tested marker in MultiCard format for use on many well-known electrical devices. The result is high-quality device marking with a high-contrast appearance.

Various types are available for devices from manufacturers like Siemens, ABB, Beckhoff etc.

Advantages at a glance:

- Tags for universal usage, self-adhesive or clip-on tags, depending on type
- For aligned equipment, e.g. circuit breakers, we supply ESG markers for clipping onto tag rails
- Individual laser-quality printing according to specifications

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

VPU AC II F 3+1 300/40

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

General ordering data

| | | | |
|------------|----------------------------|--|--|
| Type | ESG 6/15 K MC NE WS | Version | |
| Order No. | 1880100000 | ESG, Device markers x 15 mm, PA 66, Colour: white, Self-adhesive | |
| GTIN (EAN) | 4032248478781 | | |
| Qty. | 200 ST | | |

VPU Series



Extensive accessories round off the product range

General ordering data

| | | | |
|------------|----------------------------|---------|--|
| Type | VPU AC EXTENDER | Version | |
| Order No. | 3123500000 | | |
| GTIN (EAN) | 4099987270175 | | |
| Qty. | 8 ST | | |

Spare arrester



Weidmüller VPU I (Type I), VPU II (Type II) and VPU III (Type III) surge protection products effectively reduce the interference coupling that can occur due to transient surge voltages, even significantly below the limits prescribed by insulation co-ordination according to EN 60664-3 / DIN VDE 0110-3. This means that the whole installation is exposed to fewer malfunctions. The arresters are co-ordinated using technical means. This means that decoupling between Types I, II and III is unnecessary. The arresters are tested according to product standard IEC 61643-11 / DIN EN 61643-11 and can be installed in systems according to IEC 61643-12 / VDE 0675-6-12 and IEC 62305-4 / VDE 0185-4. This lightning and surge protection device is suited for installation in power supply systems. Weidmüller offers different products depending on the particular mains network type and voltage level. The VPU AC II F series is characterised by a fuse integrated in the arrester. These arresters do not require a fuse.

General ordering data

| | | | |
|------------|----------------------------|--|--|
| Type | VPU AC II F O 300/40 | Version | |
| Order No. | 2807520000 | Surge voltage arrester, Low voltage, Class II surge protection, no leakage current | |
| GTIN (EAN) | 4064675275541 | | |
| Qty. | 1 ST | | |

VPU AC II F 3+1 300/40


Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

| | | | |
|------------|----------------------------|--|--|
| Type | VPU AC II F 0 N-PE 305/... | Version | |
| Order No. | 2807540000 | Surge voltage arrester, Low voltage, Class II surge protection, no | |
| GTIN (EAN) | 4064675275558 | leakage current, TT nur für N-PE | |
| Qty. | 1 ST | | |

VPU Series



Extensive accessories round off the product range

General ordering data

| | | | |
|------------|----------------------------|---------|--|
| Type | VPU LOCKING CLIP S | Version | |
| Order No. | 2735080000 | | |
| GTIN (EAN) | 4050118826050 | | |
| Qty. | 10 ST | | |