


PVN DC 2I 1O 1MPP RD EVO 11

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

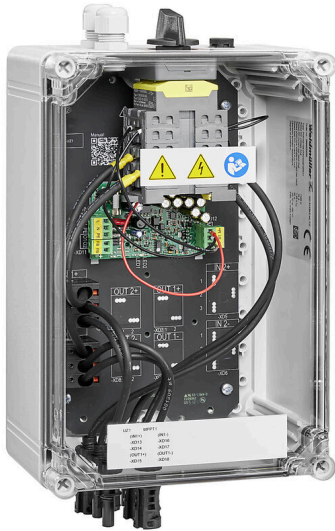

For safe remote shutdown Rooftop photovoltaic systems can require a disconnection device at the point where the cables enter into the building, that is connected to the power grid in the building. This allows the fire brigade to carry out their work in an emergency without being unnecessarily endangered. When the power supply is restored, the PV Next Fireman Switch automatically reconnects the PV strings.

General ordering data

Version	Photovoltaics, Combiner Box, Fireman's switch, PV Next, 1 MPP, 2 Inputs / 1 Output per MPP, Remote disconnecter, MC4-Evo 2, 1100 V
Order No.	2888520000
Type	PVN DC 2I 1O 1MPP RD EVO 11
GTIN (EAN)	4064675875567
Qty.	1 items

PVN DC 2I 10 1MPP RD EVO 11

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS Conform

Dimensions and weights

Depth	135 mm	Depth (inches)	5.3149 inch
Height	370 mm	Height (inches)	14.5669 inch
Width	200 mm	Width (inches)	7.874 inch
Net weight	2268 g		

Temperatures

Ambient temperature -20 °C...50 °C Humidity 5...95 %, no condensation

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c, 7a, 7cl
REACH SVHC	Lead 7439-92-1
SCIP	bdab5698-6a20-4370-8e28-8810d882d01a

Included in delivery

Included accessories	Article	Mounting foot
	Quantity	4
	Article	Dustcap VSSO
	Quantity	2
	Article	Sealing plug
	Quantity	1

Approvals and norms

Approvals EN 61439-2, IEC 61439-2, OVE-Directive R 11-1:2022-05-01

Guarantee

Time interval 5 years

Electrical characteristics

Rated DC voltage	1100 V
Rated short-term current resistance	Rated current 55 A
Current per Maximum Power Point, max.	44 A
Rated DC current per connection	Current per string, max. 44.00 A

PVN DC 2I 10 1MPP RD EVO 11

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Enclosure

Insulating material	Polyester glass-fibre reinforced, Polycarbonate	Type of mounting	Wall mounting
Impact resistance	IK08 in accordance with IEC 62208, IK10 in accordance with IEC 62262	Enclosure attachment	Via mounting feet
Protection class	II	Connection type string	Plug MC4-Evo 2

General data

Protection degree	IP65	Installation location	Protected outdoor area (>1 km from sea)
-------------------	------	-----------------------	---

Inputs

Amount of maximum power points (MPP)	1		
Number of conduit inlets	4		
DC Input + & -	Wire connection	Type of connection	Stäubli MC4-Evo 2 connector
		Compatible cable crosssection	TÜV 2 Pfg1169/08.07
		Wire cross-section, min.	2.5 mm ²
		Wire cross-section, max.	16 mm ²
Fuse type	Neither fuse cartridge nor holder		
Fuses	No		
Max. number of DC inputs	per Maximum Power Point 2 inputs connected in parallel		
Number of string inputs per MPP	≤ 2		
Number of inputs	2		

Outputs

Max. number of DC outputs	per Maximum Power Point 1 output		
DC Output + & -	Wire connection	Type of connection	Stäubli MC4-Evo 2 connector
		Compatible cable crosssection	TÜV 2 Pfg1169/08.07
		Wire cross-section, min.	2.5 mm ²
		Wire cross-section, max.	16 mm ²

Remote disconnecter

Automatic reclosing after voltage drop	Yes		
Number of operating cycles	10000		
Control voltage	100 V AC - 250 V AC 50/60Hz		
Remote disconnecter auxiliary contact	Cable entry	Number of cable entries	1
		Type of connection	Screw terminal connectors
	Wire connection	Flexible, max. H05(07) V-K	1.5 mm ²
		w. wire end ferrule, DIN 46228 pt 1, max.	1.5 mm ²

PVN DC 2I 10 1MPP RD EVO 11

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Remote disconnecter control contact	Cable entry	Number of cable entries	1
	Wire connection	Type of connection	Screw terminal connectors
		Flexible, max. H05(07) V-K	1.5 mm ²
		w. wire end ferrule, DIN 46228 pt 1, max.	1.5 mm ²
Type of power circuit disconnection	Under voltage tripping		
Turn-off time	<3 s		
Turn-on time	<15 s when the control unit was completely discharged		
Current consumption of switch	Type of switch	Fireman switch	
	Current consumption, note	The Peak current only arises for a short time when the capacitors of the fireman switch were previously completely discharged.	
	Current consumption peak	300 mA	
	Current consumption continuous	30 mA	
Number of breaking operation cycles at rated current	300		
Switch disconnecter execution	Remote disconnecter inside enclosure		
Switching disconnecter capacity	IEC 60947-3, DC-PV1		

Important note

Product information
 The SCIP number was assigned due to a lead content of more than 0.1 % of the net weight.
 Safe use instruction according to ECHA:
 The identification of the hazardous substance is sufficient to allow safe use of the article throughout its life cycle, including the service life, disassembly and waste/recycling phase

Classifications

ETIM 8.0	EC003857	ETIM 9.0	EC003857
ETIM 10.0	EC003857	ECLASS 14.0	22-57-02-92
ECLASS 15.0	22-57-02-92		

Tender specification sheets

Long specification
 Automatic ON and OFF switching fireman switch for the connection to 1 MPP tracker in the inverter. Suitable for remote disconnection of the DC side by the fire department.
 Max. string voltage Uoc:
 1100V MPP1:
 2 inputs, connection via MC4-Evo 2 connector, compatible with cable type TÜV 2 Pfg 1169/08.07 / EN 50618:2063
 1 output, connection via MC4-Evo 2 connector, compatible with cable type TÜV 2 Pfg 1169/08.07 / EN 50618:2063
 DC fireman switch:
 Switching off by undervoltage tripping. Automatic reconnection after the control voltage (230 V AC) is applied again.

PVN DC 2I 10 1MPP RD EVO 11

Technical data

With signal contact.
Connection of the fireman switch control line 230 VAC via cable glands (8-12mmØ) max. conductor cross-section: 1.5mm².
Connection of the signal contact 24 VDC via cable glands (8-12mmØ) max. conductor cross-section: 1.5mm².
Protection class: IP65.
All built into a glass fibre reinforced polyester housing.
Dimensions HxWxD: 370x200x135mm.
Approval according to low voltage switchgear IEC 61439-1:2011 and EN 61439-2:2011

PVN DC 2I 10 1MPP RD EVO 11

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

Drawings

www.weidmueller.com



	PVN	1	M2	I6	S0	F3	V1	Q1	TX	PX	10	
Series	PVN = PV Next											Voltage
	VPU = PV Protect											10 = 1kV
												11 = 1,1kV
												15 = 1,5kV
Level	1 = DC trunk box (L1)											Powersupply
												x = n/a
Series	1 = 1 MPPT supported											Monitoring
	2 = 2 MPPT supported											x = n/a
	3 = 3 MPPT supported											Output Type
	4 = 4 MPPT supported											0 = CG
	6 = 6 MPPT supported											1 = WM4C
												2 = MC4-Evo 2
Inputs	1...12 inputs											SPD
												2/0 = TYP II
												1 = TYP I+II
												X = No SPD
Switch	x = n/a											Fuses
	0 = manual switch											x = n/a
	1 = remote switch											3 = only fuse holders

PVN DC 2I 10 1MPP RD EVO 11

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

Drawings

www.weidmueller.com

