


S3T 2.5 BL**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

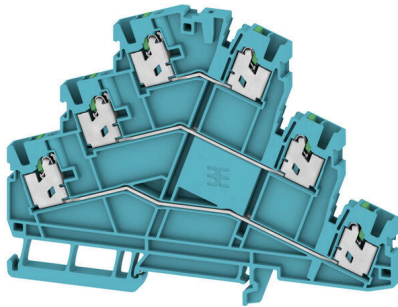

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

General ordering data

| | |
|------------|---|
| Version | Multi-tier modular terminal, SNAP IN, blue, 2.5 mm ² , 800 V, Number of connections: 6, Number of levels: 3, V-0 |
| Order No. | 2902540000 |
| Type | S3T 2.5 BL |
| GTIN (EAN) | 4099986004955 |
| Qty. | 50 items |

S3T 2.5 BL

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

Approvals



UL File Number Search

[UL Website](#)

Certificate No. (cURus)

E60693

Dimensions and weights

| | | | |
|------------|---------|-----------------|-------------|
| Depth | 64.5 mm | Depth (inches) | 2.5394 inch |
| Height | 116 mm | Height (inches) | 4.5669 inch |
| Width | 5.1 mm | Width (inches) | 0.2008 inch |
| Net weight | 20.73 g | | |

Temperatures

| | | | |
|----------------------------------|--------|----------------------------------|--------|
| Continuous operating temp., min. | -60 °C | Continuous operating temp., max. | 130 °C |
|----------------------------------|--------|----------------------------------|--------|

Environmental Product Compliance

RoHS Compliance Status Compliant without exemption

REACH SVHC No SVHC above 0.1 wt%

Material data

| | | | |
|--------------------------------|-------|---------------------------|------|
| Basic material | Wemid | Colour | blue |
| Colour of operational elements | green | UL 94 flammability rating | V-0 |

Rating data IECEx/ATEX

| | | | |
|--------------------------------|---------------------|---------------------------------|---------------------|
| Certificate No. (ATEX) | TUEV22ATEX8925U | Certificate No. (IECEX) | IECEXTUR22.0073U |
| Max. voltage (ATEX) | 550 V | Current (ATEX) | 20 A |
| Wire cross section max. (ATEX) | 2.5 mm ² | Max. voltage (IECEX) | 550 V |
| Current (IECEX) | 20 A | Wire cross section max. (IECEX) | 2.5 mm ² |
| Marking EN 60079-7 | Ex eb II C Gb | Ex 2014/34/EU label | II 2 G D |

System specifications

| | | | |
|-------------------------------|-----|-------------------------------------|----|
| End cover plate required | Yes | Number of potentials | 3 |
| Number of levels | 3 | Number of clamping points per level | 2 |
| Number of potentials per tier | 1 | Levels cross-connected internally | No |
| PE connection | No | N-function | No |
| PE function | No | PEN function | No |

Additional technical data

| | | | |
|------------------|---------|--------------------------|----|
| Open sides | right | Snap-on | No |
| Type of fixing | Snap-on | Explosion-tested version | No |
| Type of mounting | TS 35 | | |

Conductors for clamping (rated connection)

| | | | |
|----------------------|-----|---|--------|
| Gauge to IEC 60947-1 | A3 | Wire connection cross section AWG, max. | AWG 14 |
| Connection direction | top | Stripping length | 10 mm |

S3T 2.5 BL

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

| | | | |
|---|----------------------|---|----------------------|
| Type of connection 2 | SNAP IN | Type of connection | SNAP IN |
| Number of connections | 6 | Clamping range, max. | 2.5 mm ² |
| Clamping range, min. | 0.34 mm ² | Blade size | 0.6 x 3.5 mm |
| Wire connection cross section AWG, min. | AWG 22 | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 2.5 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.34 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 2.5 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.34 mm ² | Wire connection cross section, finely stranded, max. | 4 mm ² |
| Wire connection cross section, finely stranded, min. | 0.34 mm ² | Connection cross-section, stranded, max. | 2.5 mm ² |
| Connection cross-section, stranded, min. | 0.34 mm ² | Wire connection cross-section, solid core, max. | 2.5 mm ² |
| Wire connection cross-section, solid core, min. | 0.34 mm ² | Connection cross-section, finely stranded, min. | 0.34 mm ² |

General

| | | | |
|---|---------------|---|--------|
| Wire connection cross section AWG, max. | AWG 14 | Wire connection cross section AWG, min. | AWG 22 |
| Standards | IEC 60947-7-1 | | |

Rating data

| | | | |
|--|---------------------|---------------------------------|---------------|
| Rated cross-section | 2.5 mm ² | Rated voltage | 800 V |
| Rated DC voltage | 800 V | Nominal current | 22 A |
| Current at maximum wires | 22 A | Standards | IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 1.33 mΩ | Rated impulse withstand voltage | 8 kV |
| Power loss in accordance with IEC 60947-7-x | 0.77 mW | Surge voltage category | III |
| Pollution severity | 3 | | |

UL rating data

| | | | |
|--|--------|--|--------|
| Conductor size Factory wiring max. (cURus) | 12 AWG | Voltage size B (cURus) | 600 V |
| Voltage size D (cURus) | 600 V | Certificate No. (cURus) | E60693 |
| Conductor size Field wiring min. (cURus) | 22 AWG | Conductor size Factory wiring min. (cURus) | 22 AWG |
| Current size B (cURus) | 20 A | Voltage size C (cURus) | 600 V |
| Current size C (cURus) | 20 A | Current size D (cURus) | 5 A |
| Conductor size Field wiring max. (cURus) | 12 AWG | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 8.0 | EC000897 | ETIM 9.0 | EC000897 |
| ETIM 10.0 | EC000897 | ECLASS 14.0 | 27-25-01-02 |
| ECLASS 15.0 | 27-25-01-02 | | |

Drawings

