


SFC-DS 1/21 MC NE WS

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

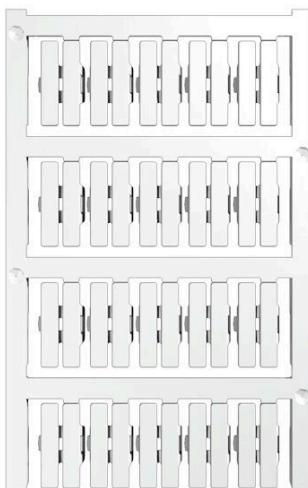

SFC – SlimFix Clip MultiCard with two labelling fields
For conductor markers, it is often required to quickly read the start and destination designation of the respective conductor. Here it makes sense to print both data directly on a marker.

The new SFC-DS markers are designed as MultiCards and are suitable for direct printing with our PrintJet printing system. Their two labelling areas allow multiple data to be printed on a single marker. The print data can be imported directly from CAE projects into the M-Print® PRO marking software. After printing, the markers are placed around the conductor and securely fixed with a special locking mechanism.

General ordering data

Version	Conductor and cable markers, 2 - 3.5 mm, 21 x 5.2 mm, white
Order No.	2905040000
Type	SFC-DS 1/21 MC NE WS
GTIN (EAN)	4099986711945
Qty.	200 items

SFC-DS 1/21 MC NE WS

Weidmüller Interface GmbH & Co. KG
 Klingenbergsstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data**Approvals**

RoHS	Conform
------	---------

Dimensions and weights

Depth	4 mm	Depth (inches)	0.1575 inch
Height	21 mm	Height (inches)	0.8268 inch
Width	5.2 mm	Width (inches)	0.2047 inch
Net weight	0.41 g		

Temperatures

Operating temperature range	-40...100 °C
-----------------------------	--------------

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%
Product Carbon Footprint	Cradle to gate 0.004 kg CO2 eq.

General data

Type of printing	neutral	
Width	5.2 mm	
UL 94 flammability rating	V-2, UL 94	
Operating temperature range, max.	100 °C	
Operating temperature range, min.	-40 °C	
Colour	white	
Halogen	No	
Basic material	Polyamide 66	
Printed characters	without	
Number of markers per packaging unit	Form of supply	MultiCard
Size of labelling field	20 x 3.2 mm	
Number of markers per combination	1 MultiCard = Conductor and cable markers	
Operating temperature range	-40...100 °C	

Conductor and cable markers

Halogen	No	Conductor cross-section, max.	2.5 mm ²
Conductor cross-section, min.	0.75 mm ²	Conductor O.D., max.	3.3 mm
Conductor O.D., min.	2 mm	Conductor O.D.	2 - 3.5 mm
Cross-section for connected wire	0.75 - 2.5 mm ²		

Classifications

ETIM 8.0	EC001530	ETIM 9.0	EC001530
ETIM 10.0	EC001530	ECLASS 14.0	27-28-11-02
ECLASS 15.0	27-28-11-02		

SFC-DS 1/21 MC NE WS

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

Drawings

www.weidmueller.com

