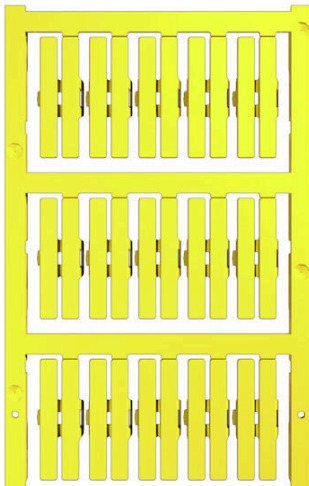


**SFC-DS 1/30 MC NE GE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**SFC – SlimFix Clip MultiCard with two labelling fields**

For conductor markers, it is often required to quickly read the start and destination designation of the respective conductor. Here it makes sense to print both data directly on a marker.

The new SFC-DS markers are designed as MultiCards and are suitable for direct printing with our PrintJet printing system. Their two labelling areas allow multiple data to be printed on a single marker. The print data can be imported directly from CAE projects into the M-Print® PRO marking software. After printing, the markers are placed around the conductor and securely fixed with a special locking mechanism.

**General ordering data**

Version	Conductor and cable markers, 30 x 5.2 mm, yellow
Order No.	<a href="#">2905080000</a>
Type	SFC-DS 1/30 MC NE GE
GTIN (EAN)	4099986918665
Qty.	150 items

## SFC-DS 1/30 MC NE GE

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	4 mm	Depth (inches)	0.1575 inch
Height	30 mm	Height (inches)	1.1811 inch
Width	5.2 mm	Width (inches)	0.2047 inch
Net weight	0.44 g		

## Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption		
REACH SVHC	No SVHC above 0.1 wt%		
Product Carbon Footprint	Cradle to gate	0.004 kg CO2 eq.	

## General data

Type of printing	neutral	Version	with snap-in foot
Width	5.2 mm	UL 94 flammability rating	V-2, UL 94
Operating temperature range, max.	100 °C	Operating temperature range, min.	-40 °C
Colour	yellow	Halogen	No
Basic material	Polyamide 66	Printed characters	without
Size of labelling field	29 x 3.2 mm	Number per roll	30

## Conductor and cable markers

Halogen	No	Conductor cross-section, max.	2.5 mm <sup>2</sup>
Conductor O.D., max.	3.3 mm	Conductor O.D., min.	2 mm
Cross-section for connected wire	2.5 mm <sup>2</sup>		

## Classifications

ETIM 8.0	EC001530	ETIM 9.0	EC001530
ETIM 10.0	EC001530	ECLASS 14.0	27-28-11-02
ECLASS 15.0	27-28-11-02		

**Drawings**

