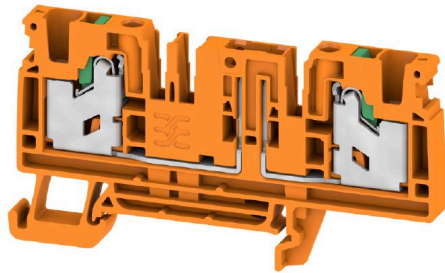


SDT 4 2C W/O DTLV OR**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

In some applications it makes sense to add a test point or a disconnect element to the feed through terminal for testing and safety purposes. With test disconnect terminals you measure electric circuits in the absence of voltage. While the disconnecting points clearance and creepage distance is not assessed in dimensional terms, the specified rated impulse voltage strength must be proven.

General ordering data

| | |
|------------|--|
| Version | Basic terminal for component plug, SNAP IN, 500, 20, 2 |
| Order No. | 2941470000 |
| Type | SDT 4 2C W/O DTLV OR |
| GTIN (EAN) | 4099986710931 |
| Qty. | 50 items |

SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



UL File Number Search [UL Website](#)
 Certificate No. (cURus) E60693

Dimensions and weights

| | | | |
|------------|---------|-----------------|-------------|
| Depth | 41 mm | Depth (inches) | 1.6142 inch |
| Height | 74 mm | Height (inches) | 2.9134 inch |
| Width | 6.1 mm | Width (inches) | 0.2402 inch |
| Net weight | 14.67 g | | |

Temperatures

| | | | |
|----------------------------------|--------|----------------------------------|--------|
| Continuous operating temp., min. | -60 °C | Continuous operating temp., max. | 130 °C |
|----------------------------------|--------|----------------------------------|--------|

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC | No SVHC above 0.1 wt% |

Material data

| | | | |
|--------------------------------|-------|---------------------------|--------|
| Basic material | Wemid | Colour | orange |
| Colour of operational elements | green | UL 94 flammability rating | V-0 |

System specifications

| | | | |
|-------------------------------------|-----|-----------------------------------|----|
| End cover plate required | Yes | Number of levels | 1 |
| Number of clamping points per level | 2 | Levels cross-connected internally | No |
| N-function | No | PE function | No |
| PEN function | No | | |

Additional technical data

| | | | |
|------------------|---------|--------------------------|-----|
| Open sides | right | Snap-on | Yes |
| Type of fixing | Snap-on | Explosion-tested version | No |
| Type of mounting | Snap-on | | |

Conductors for clamping (additional connection)

Connection type, additional connection SNAP IN

Conductors for clamping (rated connection)

| | | | |
|----------------------|-------------------|---|----------------------|
| Gauge to IEC 60947-1 | A4 | Wire connection cross section AWG, max. | AWG 20 |
| Connection direction | top | Stripping length | 12 mm |
| Type of connection | SNAP IN | Number of connections | 2 |
| Clamping range, max. | 6 mm ² | Clamping range, min. | 0.75 mm ² |

SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

| | | | |
|---|-------------------|---|----------------------|
| Blade size | 0.6 x 3.5 mm | Wire connection cross section AWG, min. | AWG 12 |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 4 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.75 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 4 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.75 mm ² |
| Wire connection cross section, finely stranded, max. | 6 mm ² | Wire connection cross section, finely stranded, min. | 0.75 mm ² |
| Connection cross-section, stranded, max. | 4 mm ² | Connection cross-section, stranded, min. | 0.75 mm ² |
| Wire connection cross-section, solid core, max. | 6 mm ² | Wire connection cross-section, solid core, min. | 0.75 mm ² |

General

| | | | |
|---|---------------|---|--------|
| Wire connection cross section AWG, max. | AWG 20 | Wire connection cross section AWG, min. | AWG 12 |
| Standards | IEC 60947-7-1 | | |

Rating data

| | | | |
|--|-------------------|---------------------------------|---------------|
| Rated cross-section | 4 mm ² | Rated voltage | 500 V |
| Rated DC voltage | 500 V | Nominal current | 20 A |
| Current at maximum wires | 20 A | Standards | IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 1.02 mΩ | Rated impulse withstand voltage | 4 kV |
| Power loss in accordance with IEC 60947-7-x | 1.02 mW | Surge voltage category | III |
| Pollution severity | 3 | | |

UL rating data

| | | | |
|---------------------------------|--------|-------------------------|--------|
| Voltage size B (cURus) | 300 V | Voltage size D (cURus) | 600 V |
| Wire cross section max. (cURus) | 10 AWG | Certificate No. (cURus) | E60693 |
| Wire cross section min. (cURus) | 20 AWG | Current size B (cURus) | 25 A |
| Voltage size C (cURus) | 300 V | Current size C (cURus) | 25 A |
| Current size D (cURus) | 5 A | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 7.0 | EC000897 | ETIM 8.0 | EC000897 |
| ETIM 9.0 | EC000897 | ETIM 10.0 | EC000897 |
| ECLASS 11.0 | 27-14-11-26 | ECLASS 12.0 | 27-14-11-26 |
| ECLASS 13.0 | 27-25-01-07 | ECLASS 14.0 | 27-25-01-07 |
| ECLASS 15.0 | 27-25-01-07 | | |



SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

www.weidmueller.com

Accessories

WS 10/6



WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | |
|------------|----------------------------|--|
| Type | WS 10/6 MM WS | Version |
| Order No. | 2712140000 | WS, Terminal marker, 10 x 6 mm, Weidmueller, white |
| GTIN (EAN) | 4050118749496 | |
| Qty. | 600 ST | |

DEK 5/6



WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | |
|------------|----------------------------|--|
| Type | DEK 5/6 MM WS | Version |
| Order No. | 2007120000 | Dekafix, Terminal marker, 5 x 6 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392104 | |
| Qty. | 600 ST | |

SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | WS 10/6 M MC NE WS | Version |
| Order No. | 1818400000 | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4032248310876 | Allen-Bradley, white |
| Qty. | 600 ST | |
| Type | WS 10/6 M PLUS MC NE WS | Version |
| Order No. | 2003780000 | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4050118424461 | Allen-Bradley, white |
| Qty. | 600 ST | |
| Type | WS 10/6 MC M NE BL | Version |
| Order No. | 1069080000 | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4032248824618 | Allen-Bradley, blue |
| Qty. | 600 ST | |
| Type | WS 10/6 MC M NE GE | Version |
| Order No. | 1917430000 | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4032248551637 | Allen-Bradley, yellow |
| Qty. | 600 ST | |
| Type | WS 10/6 MC M NE GN | Version |
| Order No. | 1917420000 | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4032248551620 | Allen-Bradley, green |
| Qty. | 600 ST | |
| Type | WS 10/6 MC M NE RT | Version |
| Order No. | 1917440000 | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4032248551644 | Allen-Bradley, red |
| Qty. | 600 ST | |
| Type | WS 10/6 MC NE WS | Version |
| Order No. | 1828450000 | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4032248350513 | Allen-Bradley, white |
| Qty. | 600 ST | |
| Type | WS 10/6 PLUS MC NE WS | Version |
| Order No. | 1046390000 | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4032248782109 | Allen-Bradley, white |
| Qty. | 600 ST | |

SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Custom printing



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | WS 10/6 M PLUS MC SDR | Version |
| Order No. | 2007780000 | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4050118393187 | Allen-Bradley, To customer specification |
| Qty. | 120 ST | |
| Type | WS 10/6 MC M SDR | Version |
| Order No. | 1818410000 | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4032248310883 | Allen-Bradley, To customer specification |
| Qty. | 120 ST | |
| Type | WS 10/6 MC SDR | Version |
| Order No. | 1828460000 | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4032248367399 | Allen-Bradley, To customer specification |
| Qty. | 120 ST | |
| Type | WS 10/6 PLUS MC SDR | Version |
| Order No. | 1046330000 | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4032248782031 | Allen-Bradley, To customer specification |
| Qty. | 120 ST | |

Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/6 MC NE BL | Version |
| Order No. | 1238290000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4050118267327 | Weidmueller, blue |
| Qty. | 1000 ST | |
| Type | DEK 5/6 MC NE GE | Version |
| Order No. | 1238280000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4050118038750 | Weidmueller, yellow |
| Qty. | 1000 ST | |
| Type | DEK 5/6 MC NE GN | Version |
| Order No. | 1238310000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4050118271812 | Weidmueller, green |
| Qty. | 1000 ST | |
| Type | DEK 5/6 MC NE GR | Version |
| Order No. | 1238330000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4050118323306 | Weidmueller, grey |
| Qty. | 1000 ST | |
| Type | DEK 5/6 MC NE OR | Version |
| Order No. | 1912090000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4032248540525 | Weidmueller, orange |
| Qty. | 1000 ST | |
| Type | DEK 5/6 MC NE WS | Version |
| Order No. | 1609820000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4008190203436 | Weidmueller, white |
| Qty. | 1000 ST | |

Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
 - Strips for fast installation
 - Terminal markers, suitable for all Weidmüller cable connectors
 - Available as blank MultiCard or with standard printing
- For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/6 MC SDR | Version |
| Order No. | 1609830000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4008190456603 | Weidmueller, To customer specification |
| Qty. | 200 ST | |
| Type | DEK 5/6 PLUS MC SDR | Version |
| Order No. | 1038650000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4032248767908 | Weidmueller, To customer specification |
| Qty. | 200 ST | |

SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

Plus



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.


Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
 - Strips for fast installation
 - Terminal markers, suitable for all Weidmüller cable connectors
 - Available as blank MultiCard or with standard printing
- For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/6 PLUS MC NE WS | Version |
| Order No. | 1011320000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4032248717644 | Weidmueller, white |
| Qty. | 1000 ST | |

Component plugs



The component plug is used to integrate an electrical component in a disconnect terminal block. After soldering the electronic component, the plug can be integrated into the disconnection area of our disconnect terminal blocks and thus changes the disconnect terminal block into a modular terminal block with integrated electronic component.

General ordering data

| | | |
|------------|----------------------------|-----------------------------------|
| Type | BEST | Version |
| Order No. | 1833100000 | Accessories, Component plug |
| GTIN (EAN) | 4032248501014 | |
| Qty. | 50 ST | |
| Type | BEST/D | Version |
| Order No. | 1878560000 | Accessories, Component plug, 1 A |
| GTIN (EAN) | 4032248471492 | |
| Qty. | 50 ST | |
| Type | BEST/DRBR | Version |
| Order No. | 1878570000 | Accessories, Component plug, 22 A |
| GTIN (EAN) | 4032248471508 | |
| Qty. | 50 ST | |

SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Cross-connections



The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | ZQV 4N/10 | Version |
| Order No. | 1528090000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118332896 | 10, Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/10 BK | Version |
| Order No. | 2810830000 | Cross-connector (terminal), Plugged, black, 32 A, Number of poles: |
| GTIN (EAN) | 4064675283447 | 10, Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/10 BL | Version |
| Order No. | 1528230000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 10, |
| GTIN (EAN) | 4050118333138 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/10 RD | Version |
| Order No. | 2460740000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 10, |
| GTIN (EAN) | 4050118476163 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/10 WT | Version |
| Order No. | 2831790000 | Cross-connector (terminal), Plugged, white, 32 A, Number of poles: |
| GTIN (EAN) | 4064675417026 | 10, Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/2 | Version |
| Order No. | 1527930000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118332766 | 2, Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/2 BK | Version |
| Order No. | 2810840000 | Cross-connector (terminal), Plugged, black, 32 A, Number of poles: 2, |
| GTIN (EAN) | 4064675283454 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/2 BL | Version |
| Order No. | 1528040000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 2, |
| GTIN (EAN) | 4050118332773 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/2 RD | Version |
| Order No. | 2460450000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 2, |
| GTIN (EAN) | 4050118476149 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/2 WT | Version |
| Order No. | 2831800000 | Cross-connector (terminal), Plugged, white, 32 A, Number of poles: |
| GTIN (EAN) | 4064675417033 | 20, Pitch in mm (P): 6.10, Insulated: Yes, Width: 119.7 mm |
| Qty. | 60 ST | |

SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|---|
| Type | ZQV 4N/20 | Version |
| Order No. | 2883800000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4064675848769 | 20, Pitch in mm (P): 6.10, Insulated: Yes, Width: 27.95 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/20 BL | Version |
| Order No. | 2810850000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 10, |
| GTIN (EAN) | 4064675283461 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 119.7 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/20 BK | Version |
| Order No. | 2810870000 | Cross-connector (terminal), Plugged, black, 32 A, Number of poles: |
| GTIN (EAN) | 4064675283485 | 20, Pitch in mm (P): 6.10, Insulated: Yes, Width: 27.95 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/20 RD | Version |
| Order No. | 2810860000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 20, |
| GTIN (EAN) | 4064675283478 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 27.95 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/3 | Version |
| Order No. | 1527940000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118332865 | 3, Pitch in mm (P): 6.10, Insulated: Yes, Width: 16 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/3 BK | Version |
| Order No. | 2810880000 | Cross-connector (terminal), Plugged, black, 32 A, Number of poles: 3, |
| GTIN (EAN) | 4064675283492 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 27.95 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/3 BL | Version |
| Order No. | 1528080000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 3, |
| GTIN (EAN) | 4050118333008 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 16 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/3 RD | Version |
| Order No. | 2460810000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 3, |
| GTIN (EAN) | 4050118476231 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 16 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/3 WT | Version |
| Order No. | 2831810000 | Cross-connector (terminal), Plugged, white, 32 A, Number of poles: |
| GTIN (EAN) | 4064675417040 | 41, Pitch in mm (P): 6.10, Insulated: Yes, Width: 247.8 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/30 | Version |
| Order No. | 2561580000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118570113 | 30, Pitch in mm (P): 6.10, Insulated: Yes, Width: 181.7 mm |
| Qty. | 5 ST | |
| Type | ZQV 4N/30 BL | Version |
| Order No. | 2561610000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 30, |
| GTIN (EAN) | 4050118569971 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 181.7 mm |
| Qty. | 5 ST | |
| Type | ZQV 4N/30 RD | Version |
| Order No. | 2561600000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 30, |
| GTIN (EAN) | 4050118569964 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 181.7 mm |
| Qty. | 5 ST | |
| Type | ZQV 4N/32 | Version |
| Order No. | 2561670000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118570175 | 32, Pitch in mm (P): 6.00, Insulated: Yes, Width: 193.9 mm |
| Qty. | 5 ST | |

SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|---|
| Type | ZQV 4N/4 | Version |
| Order No. | 1527970000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118332889 | 4, Pitch in mm (P): 6.10, Insulated: Yes, Width: 22.1 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/4 BK | Version |
| Order No. | 2810890000 | Cross-connector (terminal), Plugged, black, 32 A, Number of poles: 4, |
| GTIN (EAN) | 4064675283607 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 27.95 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/4 BL | Version |
| Order No. | 1528120000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 4, |
| GTIN (EAN) | 4050118332872 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 22.1 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/4 RD | Version |
| Order No. | 2460800000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 4, |
| GTIN (EAN) | 4050118476224 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 22.1 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/4 WT | Version |
| Order No. | 2831820000 | Cross-connector (terminal), Plugged, white, 32 A, Number of poles: |
| GTIN (EAN) | 4064675417057 | 20, Pitch in mm (P): 6.10, Insulated: Yes, Width: 119.7 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/41 | Version |
| Order No. | 2883810000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4064675848844 | 41, Pitch in mm (P): 6.10, Insulated: Yes, Width: 253.9 mm |
| Qty. | 10 ST | |
| Type | ZQV 4N/41 BK | Version |
| Order No. | 2831890000 | Cross-connector (terminal), Plugged, black, 32 A, Number of poles: |
| GTIN (EAN) | 4064675417125 | 41, Pitch in mm (P): 6.10, Insulated: Yes, Width: 253.9 mm |
| Qty. | 10 ST | |
| Type | ZQV 4N/41 BL | Version |
| Order No. | 2883820000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 41, |
| GTIN (EAN) | 4064675848851 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 253.9 mm |
| Qty. | 10 ST | |
| Type | ZQV 4N/41 RD | Version |
| Order No. | 2883840000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 41, |
| GTIN (EAN) | 4064675848868 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 253.9 mm |
| Qty. | 10 ST | |
| Type | ZQV 4N/5 | Version |
| Order No. | 1527980000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118332759 | 5, Pitch in mm (P): 6.10, Insulated: Yes, Width: 28.2 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/5 BK | Version |
| Order No. | 2810900000 | Cross-connector (terminal), Plugged, black, 32 A, Number of poles: 5, |
| GTIN (EAN) | 4064675283614 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 27.95 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/5 BL | Version |
| Order No. | 1528140000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 5, |
| GTIN (EAN) | 4050118333015 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 28.2 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/5 RD | Version |
| Order No. | 2460790000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 5, |
| GTIN (EAN) | 4050118476217 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 28.2 mm |
| Qty. | 60 ST | |

SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|---|
| Type | ZQV 4N/5 WT | Version |
| Order No. | 2831830000 | Cross-connector (terminal), Plugged, white, 32 A, Number of poles: |
| GTIN (EAN) | 4064675417064 | 41, Pitch in mm (P): 6.10, Insulated: Yes, Width: 247.8 mm |
| Qty. | 60 ST | |
| Type | ZQV 4N/50 | Version |
| Order No. | 1528130000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118332902 | 50, Pitch in mm (P): 6.10, Insulated: Yes, Width: 303.7 mm |
| Qty. | 5 ST | |
| Type | ZQV 4N/50 BL | Version |
| Order No. | 1528240000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 50, |
| GTIN (EAN) | 4050118333121 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 303.7 mm |
| Qty. | 5 ST | |
| Type | ZQV 4N/50 RD | Version |
| Order No. | 2460730000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 50, |
| GTIN (EAN) | 4050118476156 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 303.7 mm |
| Qty. | 5 ST | |
| Type | ZQV 4N/6 | Version |
| Order No. | 1527990000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118332919 | 6, Pitch in mm (P): 6.10, Insulated: Yes, Width: 34.3 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/6 BK | Version |
| Order No. | 2810910000 | Cross-connector (terminal), Plugged, black, 32 A, Number of poles: 6, |
| GTIN (EAN) | 4064675283621 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 27.95 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/6 BL | Version |
| Order No. | 1528170000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 6, |
| GTIN (EAN) | 4050118332926 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 34.3 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/6 RD | Version |
| Order No. | 2460780000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 6, |
| GTIN (EAN) | 4050118476200 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 34.3 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/6 WT | Version |
| Order No. | 2831840000 | Cross-connector (terminal), Plugged, white, 32 A, Number of poles: 2, |
| GTIN (EAN) | 4064675417071 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/7 | Version |
| Order No. | 1528020000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118332780 | 7, Pitch in mm (P): 6.10, Insulated: Yes, Width: 40.4 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/7 BK | Version |
| Order No. | 2810920000 | Cross-connector (terminal), Plugged, black, 32 A, Number of poles: 7, |
| GTIN (EAN) | 4064675283638 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 27.95 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/7 BL | Version |
| Order No. | 1528180000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 7, |
| GTIN (EAN) | 4050118333114 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 40.4 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/7 RD | Version |
| Order No. | 2460770000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 7, |
| GTIN (EAN) | 4050118476194 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 40.4 mm |
| Qty. | 20 ST | |

SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|---|
| Type | ZQV 4N/7 WT | Version |
| Order No. | 2831850000 | Cross-connector (terminal), Plugged, white, 32 A, Number of poles: 3, |
| GTIN (EAN) | 4064675417088 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 16 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/8 | Version |
| Order No. | 1528030000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118332841 | 8, Pitch in mm (P): 6.10, Insulated: Yes, Width: 46.5 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/8 BK | Version |
| Order No. | 2810930000 | Cross-connector (terminal), Plugged, black, 32 A, Number of poles: 8, |
| GTIN (EAN) | 4064675283645 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 27.95 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/8 BL | Version |
| Order No. | 1528190000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 8, |
| GTIN (EAN) | 4050118332858 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 46.5 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/8 RD | Version |
| Order No. | 2460760000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 8, |
| GTIN (EAN) | 4050118476187 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 46.5 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/8 WT | Version |
| Order No. | 2831860000 | Cross-connector (terminal), Plugged, white, 32 A, Number of poles: 4, |
| GTIN (EAN) | 4064675417095 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 22.1 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/9 | Version |
| Order No. | 1528070000 | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles: |
| GTIN (EAN) | 4050118332797 | 9, Pitch in mm (P): 6.10, Insulated: Yes, Width: 52.6 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/9 BK | Version |
| Order No. | 2831780000 | Cross-connector (terminal), Plugged, black, 32 A, Number of poles: |
| GTIN (EAN) | 4064675417019 | 20, Pitch in mm (P): 6.10, Insulated: Yes, Width: 119.7 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/9 BL | Version |
| Order No. | 1528220000 | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 9, |
| GTIN (EAN) | 4050118333107 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 52.6 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/9 RD | Version |
| Order No. | 2460750000 | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 9, |
| GTIN (EAN) | 4050118476170 | Pitch in mm (P): 6.10, Insulated: Yes, Width: 52.6 mm |
| Qty. | 20 ST | |
| Type | ZQV 4N/9 WT | Version |
| Order No. | 2831870000 | Cross-connector (terminal), Plugged, white, 32 A, Number of poles: |
| GTIN (EAN) | 4064675417101 | 10, Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm |
| Qty. | 20 ST | |


SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

End bracket




Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

General ordering data

| | | |
|------------|----------------------------|-----------------------|
| Type | AEB 35 SC/1 | Version |
| Order No. | 1991920000 | A-series, End bracket |
| GTIN (EAN) | 4050118376722 | |
| Qty. | 50 ST | |
| Type | AEB 35 SC/1 BK | Version |
| Order No. | 2475310000 | A-series, End bracket |
| GTIN (EAN) | 4050118487114 | |
| Qty. | 50 ST | |
| Type | AEB 35 SCL/1 V0 | Version |
| Order No. | 2661280000 | A-series, End bracket |
| GTIN (EAN) | 4050118702163 | |
| Qty. | 20 ST | |
| Type | AEB 35 SCL/1 V0 BK | Version |
| Order No. | 2661300000 | A-series, End bracket |
| GTIN (EAN) | 4050118702187 | |
| Qty. | 20 ST | |
| Type | AEB 35 SCL/1 V0 GY | Version |
| Order No. | 2661290000 | A-series, End bracket |
| GTIN (EAN) | 4050118702170 | |
| Qty. | 20 ST | |

Fuse holder



The fuse holder SIHA quickly turns a disconnect terminal into a fuse terminal: simply remove the disconnect lever and attach the fuse unit.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | SIHA 3/G20 | Version |
| Order No. | 7921560000 | Fuse holder for feed-through modular terminal, black, 6.3 A, |
| GTIN (EAN) | 4032248264643 | pluggable, V-0, Wemid |
| Qty. | 25 ST | |

SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|--|
| Type | SIHA 3/G20 | Version |
| Order No. | 7926190000 | Fuse holder for feed-through modular terminal, black, 6.3 A, |
| GTIN (EAN) | 4032248264612 | pluggable, V-O, Wemid |
| Qty. | 1000 ST | |
| Type | SIHA 3/G20 BL | Version |
| Order No. | 1004260000 | Fuse holder for feed-through modular terminal, blue, 6.3 A, pluggable, |
| GTIN (EAN) | 4032248709717 | V-O, Wemid |
| Qty. | 25 ST | |
| Type | SIHA 3/G20/LD 10-36V | Version |
| Order No. | 7921570000 | Fuse holder for feed-through modular terminal, black, 2.31 mA, |
| GTIN (EAN) | 4032248322503 | pluggable, V-O, Wemid |
| Qty. | 25 ST | |
| Type | SIHA 3/G20/LD 10-36V BL | Version |
| Order No. | 1005250000 | Fuse holder for feed-through modular terminal, blue, 2.31 A, |
| GTIN (EAN) | 4032248712038 | pluggable, V-O, Wemid |
| Qty. | 25 ST | |
| Type | SIHA 3/G20/LD 140-250V | Version |
| Order No. | 7921600000 | Fuse holder for feed-through modular terminal, black, 2.31 mA, |
| GTIN (EAN) | 4032248322633 | pluggable, V-O, Wemid |
| Qty. | 25 ST | |
| Type | SIHA 3/G20/LD 35-70V | Version |
| Order No. | 7921580000 | Fuse holder for feed-through modular terminal, black, 2.31 mA, |
| GTIN (EAN) | 4032248322619 | pluggable, V-O, Wemid |
| Qty. | 25 ST | |
| Type | SIHA 3/G20/LD 60-150V | Version |
| Order No. | 7921590000 | Fuse holder for feed-through modular terminal, black, 2.31 mA, |
| GTIN (EAN) | 4032248322626 | pluggable, V-O, Wemid |
| Qty. | 25 ST | |

End plates and partition plates



End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

General ordering data

| | | |
|------------|----------------------------|---------------------------|
| Type | APP 2 | Version |
| Order No. | 2489090000 | A-series, Partition plate |
| GTIN (EAN) | 4050118499308 | |
| Qty. | 50 ST | |

SDT 4 2C W/O DTLV OR

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Disconnect plugs



In contrast to the terminal blocks with integrated disconnect lever, our disconnect plugs can be completely detached or removed from the terminal block and the respective application and offer a flexible alternative solution to our standard disconnectors.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | DTLE 2.5/4 | Version |
| Order No. | 2910530000 | Locking element (terminal), Wemid, red |
| GTIN (EAN) | 4099986519466 | |
| Qty. | 25 ST | |

End plates and partition plates



End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | SEP 3C 4 | Version |
| Order No. | 2874800000 | End plate for terminals, dark beige, Height: 76.05 mm, Width: 2 mm, |
| GTIN (EAN) | 4064675649830 | V-0, Wemid, Snap-on: Yes |
| Qty. | 20 ST | |

Disconnect plugs



In contrast to the terminal blocks with integrated disconnect lever, our disconnect plugs can be completely detached or removed from the terminal block and the respective application and offer a flexible alternative solution to our standard disconnectors.

General ordering data

| | | |
|------------|----------------------------|-----------------------|
| Type | AFTC | Version |
| Order No. | 2863420000 | Cover hood (terminal) |
| GTIN (EAN) | 4064675596516 | |
| Qty. | 50 ST | |