

**SAISWP-P-4A-3.5/5.5-M8**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)



Individual cable lengths are often required nowadays. In order to meet these demands, Weidmüller offers a wide range of plug-in connectors for custom assembly. Male plugs and female sockets for customisable assembly for M8, M12, M16 and 7/8" connections which are highly robust and ideally suited to machine engineering, for instance. The M8 round plug-in connectors are particularly suited to applications where space is limited.

**General ordering data**

Version	Field attachable connector, M8
Order No.	<a href="#">3103350000</a>
Type	SAISWP-P-4A-3.5/5.5-M8
GTIN (EAN)	4099987149686
Qty.	1 items

**SAISWP-P-4A-3.5/5.5-M8**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data**

**Approvals**

ROHS Conform

**Dimensions and weights**

Width	47 mm	Width (inches)	1.8504 inch
Diameter	14 mm	Net weight	13 g

**Environmental Product Compliance**

RoHS Compliance Status Compliant without exemption  
 REACH SVHC No SVHC above 0.1 wt%

**Technical data customisable plug-in connectors**

Number of poles	4	
Coding	none	
Contact surface	Ni/Au	
Type of connection	PUSH IN	
Housing main material	PBT diecast zinc	
Cable diameter, max.	5.5 mm	
Cable diameter, min.	3.5 mm	
Contact material	CuSn	
Conductor cross-section, max.	0.5 mm <sup>2</sup>	
Conductor cross-section, min.	0.14 mm <sup>2</sup>	
Nominal current	4 A	
Protection degree	IP67	
Plugging cycles	≥ 100	
Pollution severity	3	
Gender of contact	Male	
Rated voltage	Rated voltage	30 V
	Voltage type	AC/DC
Shield connection	No	
Threaded ring material	Diecast zinc	
Temperature range of housing	-25...+85 °C	
Connection cross-section, max.	0.5 mm <sup>2</sup>	
Connection cross-section, min.	0.14 mm <sup>2</sup>	

**Standards**

Connector standard IEC 61076-2-104

**Classifications**

ETIM 8.0	EC002635	ETIM 9.0	EC002635
ETIM 10.0	EC002635	ECLASS 14.0	27-44-01-16
ECLASS 15.0	27-44-01-16		


SAISWP-P-4A-3.5/5.5-M8

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

Drawings

www.weidmueller.com

Dimensioned drawing

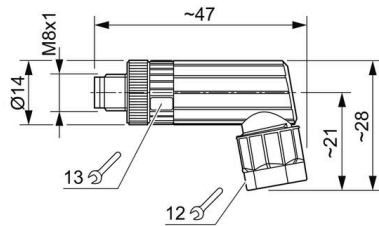

Pole scheme

