


SP-RS PLC PLC5 1771-WN 40CH

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

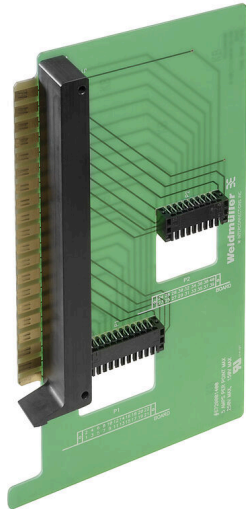

Feed through connection

- PLC-5 1771 conversion to pluggable connector(s)
- 10-, 12-, 18-, 21 • or 40-point cards

General ordering data

Order No.	6720001400
Type	SP-RS PLC PLC5 1771-WN 40CH
GTIN (EAN)	4050118765878
Qty.	1 items

SP-RS PLC PLC5 1771-WN 40CH

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

ROHS Conform

Dimensions and weights

Depth	142 mm	Depth (inches)	5.5905 inch
Height	254 mm	Height (inches)	10 inch
Width	30 mm	Width (inches)	1.1811 inch
Net weight	196 g		

Temperatures

Storage temperature 0...50 °C Operating temperature 0...50 °C

Environmental Product Compliance

RoHS Compliance Status Compliant without exemption
 REACH SVHC No SVHC above 0.1 wt%

Classifications

ETIM 8.0	EC002780	ETIM 9.0	EC002780
ETIM 10.0	EC002780	ECLASS 14.0	27-14-11-52
ECLASS 15.0	27-14-11-52		

SP-RS PLC PLC5 1771-WN 40CH

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

Drawings

www.weidmueller.com



Pin	Function	Voltage
1	0V	0V
2	0V	0V
3	0V	0V
4	0V	0V
5	0V	0V
6	0V	0V
7	0V	0V
8	0V	0V
9	0V	0V
10	0V	0V
11	0V	0V
12	0V	0V
13	0V	0V
14	0V	0V
15	0V	0V
16	0V	0V
17	0V	0V
18	0V	0V
19	0V	0V
20	0V	0V
21	0V	0V
22	0V	0V
23	0V	0V
24	0V	0V
25	0V	0V
26	0V	0V
27	0V	0V
28	0V	0V
29	0V	0V
30	0V	0V
31	0V	0V
32	0V	0V
33	0V	0V
34	0V	0V
35	0V	0V
36	0V	0V
37	0V	0V
38	0V	0V
39	0V	0V
40	0V	0V