Data sheet

# H1,5/14DS SW

**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com



- Polypropylene conical cable entry funnel
- Heat-resistant up to 105°C

For conductors from 0.5 – 10.0 mm² (AWG 20-7)
Material: E-Cu, tin galvanised
Dimensional tolerance acc. to DIN 46228 sect. 4

## General ordering data

| | |
|---|---|
| Version | Wire-end ferrule, Standard, 10 mm, 8 mm, black |
| Order No. | 9025240000 |
| Type | H1,5/14DS SW |
| GTIN (EAN) | 4008190085599 |
| Qty. | 500 items |
| Packaging | loose |

# H1,5/14DS SW

**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

## Technical data

### Approvals

| | |
|---|---|
| Approvals | |
| ROHS | Conform |
| UL File Number Search | UL Website |
| Certificate no. (cULus) | E499744 |

### Dimensions and weights

| | |
|---|---|
| Net weight | 0.12 g |

### Environmental Product Compliance

| | |
|---|---|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC | No SVHC above 0.1 wt% |

### Technical data

| | | | |
|---|---|---|---|
| Description of article | Wire end ferrule with plastic collar, special size, black | Version | Standard |

### Wire-end ferrules

| | | | |
|---|---|---|---|
| Contact surface diameter (D1) | 1.7 mm | Contact surface length (L2) | 8 mm |
| Collar diameter (D2) | 4 mm | Plastic collar thickness (S2) | 0.25 mm |
| L1 in mm | 14.00 mm | Wire connection cross section AWG, max. | AWG 16 |
| Metal sleeve thickness (S1) | 0.15 mm | Stripping length | 10 mm |
| Conductor cross-section | 1.5 mm² | Colour code | Weidmueller |

### Classifications

| | | | |
|---|---|---|---|
| ETIM 8.0 | EC000005 | ETIM 9.0 | EC000005 |
| ETIM 10.0 | EC000005 | ECLASS 14.0 | 27-40-02-01 |
| ECLASS 15.0 | 27-40-02-01 | | |

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

## Drawings
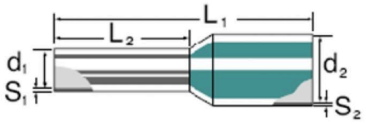
### Drawing