LIF 1,5M638 R

Insulated tab connector made from PVC with copper sleeve

- Commercially available designs
- Not soldered
- With conical entry funnel

General ordering data

Version	cable lug, terminal end,Insulated cable connector,0.5 mm² - 1.5 mm²,red
Order No.	9200580000
Type	LIF 1,5M638 R
GTIN (EAN)	4032248410422
Qty.	100 items

LIF 1,5M638 R

Technical data

Approvals

ROHS	Conform

Dimensions and weights

Depth	5.8 mm	Depth (inches)	0.2283 inch
Width	20.8 mm	Width (inches)	0.8189 inch
Net weight	0.81 g		

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Technical data

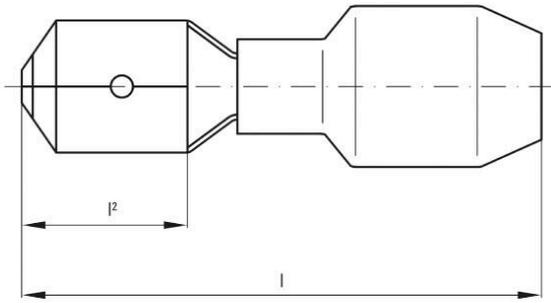|	
Description of article	Cable lug connector 0.5-1.5 mm²

Connectors

Conductor cross-section, max.	1.5 mm²	Conductor cross-section, min.	0.5 mm²
Insulation	Available, Partially insulated	Dimension (flat blade connector)	6.3 x 0.8 mm
Dimension	6.3 x 0.8 mm	Material/plastic	PVC
Plug-in width (d2)	6.3 mm	Plug-in density (d3)	0.8 mm
Plastic collar length (b)	10 mm	Plastic collar diameter (D)	4 mm

Classifications

ETIM 8.0	EC000516	ETIM 9.0	EC000516
ETIM 10.0	EC000516	ECLASS 14.0	27-44-03-92
ECLASS 15.0	27-44-03-92		

LIF 1,5M638 R

Drawings

LIF 1,5M638 R

Accessories

Crimping tools

Crimping tools for insulated connectors
cable lugs, terminal pins, parallel and serial connectors,
plug-in connectors
• Ratchet guarantees precise crimping
• Release option in the event of incorrect operation
• With stop for exact positioning of the contacts.
• Tested to DIN EN 60352 part 2

General ordering data

Type	HTI 15	Version	
Order No.	9014400000	Pressing tool, Tool for insulated cable connectors, 0.5mm², 2.5mm²,	
GTIN (EAN)	4008190159412	Double crimp	
Qty.	1 ST		
Type	CTI 6	Version	
Order No.	9006120000	Pressing tool, Crimping tool for contacts, 0.5mm², 6mm², Oval	
GTIN (EAN)	4008190044527	crimping, Double crimp	
Qty.	1 ST		
Type	CTI 6 G	Version	
Order No.	9202850000	Pressing tool, Tool for insulated cable connectors, 0.5mm², 6mm²,	
GTIN (EAN)	4032248517855	Oval crimping, Parallel crimp	
Qty.	1 ST		