

SCM-I QV S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Cross-connection for the sockets in the D-SERIES DRM.

General ordering data

Version	RIDERSERIES RCM, Cross-connector
Order No.	1132080000
Type	SCM-I QV S
GTIN (EAN)	4032248912193
Qty.	10 items
Delivery status	This article will no longer be available in the future.
Available until	2026-06-30T00:00:00+02:00
Alternative product	CXM CCS 6P GY

SCM-I QV S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

ROHS Conform

Dimensions and weights

Net weight 5.72 g

Temperatures

Storage temperature -40 °C...85 °C Ambient temperature -45 °C...70 °C
 Operating temperature

Environmental Product Compliance

RoHS Compliance Status Compliant without exemption
 REACH SVHC No SVHC above 0.1 wt%

Cross-connection data

Rated current	12 A	Insulation	Yes
Touch-safe protection	Yes	Colour	white
Number of cross-connected terminals	6	Number of poles	6
Pitch in mm (P)	27.00 mm	Version	can be cut to length

General data

Version can be cut to length Colour white

Connection data

Pitch in mm (P) 27.00 mm

Classifications

ETIM 8.0	EC002586	ETIM 9.0	EC002586
ETIM 10.0	EC002586	ECLASS 14.0	27-37-16-92
ECLASS 15.0	27-37-16-92		

SCM-I QV S


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Example of use


How to install cross connection

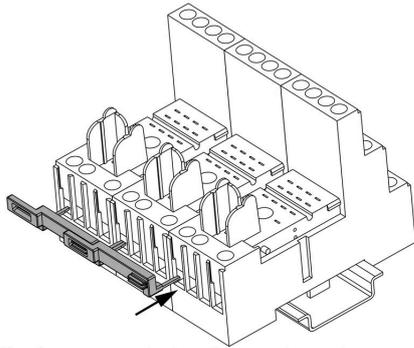

Plug the cross connection into wire-connection opening and fix it with tighten the screw

Plug the cross-connection in the cable connections

Example of use

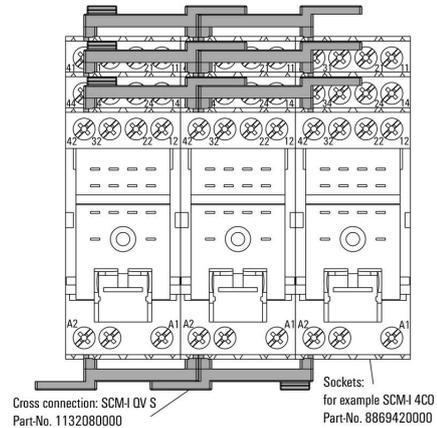

Cross-connector bridges to the same connection on the neighbouring base