

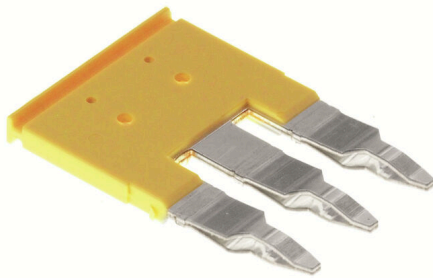
ZQV 6/3 GE ZTL6**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image**Current and voltage transformer wiring**

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

General ordering data

Version	Z-series, Cross-connector, For the terminals, Number of poles: 3
Order No.	1363020000
Type	ZQV 6/3 GE ZTL6
GTIN (EAN)	4050118165258
Qty.	60 items
Delivery status	This article will no longer be available in the future.
Available until	2026-06-30T00:00:00+02:00

ZQV 6/3 GE ZTL6

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Approvals

ROHS	Conform
------	---------

Dimensions and weights

Depth	33.96 mm	Depth (inches)	1.337 inch
Height	22.4 mm	Height (inches)	0.8819 inch
Width	3.1 mm	Width (inches)	0.122 inch
Net weight	4.05 g		

Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-50 °C...75 °C
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Material data

Basic material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

System specifications

Version	For the terminals
---------	-------------------

Additional technical data

Type of fixing	Plugged	Installation advice	Direct mounting
Explosion-tested version	No		

Dimensions

Pitch in mm (P)	8.10 mm
-----------------	---------

General

Number of poles	3	Installation advice	Direct mounting
-----------------	---	---------------------	-----------------

Rating data

Rated voltage	400 V	Nominal current	41 A
---------------	-------	-----------------	------

Important note

Product information	Due to stability and temperature reasons It is only possible to break out 60% of contact elements. The usage of cross connectors reduces the rated voltage to 400 V. The voltage reduced to 25 V if cut cross connection with blank cut edges are used.
---------------------	---

Classifications

ETIM 8.0	EC000489	ETIM 9.0	EC000489
ETIM 10.0	EC000489	ECLASS 14.0	27-25-03-03

Technical data

ECLASS 15.0

27-25-03-03