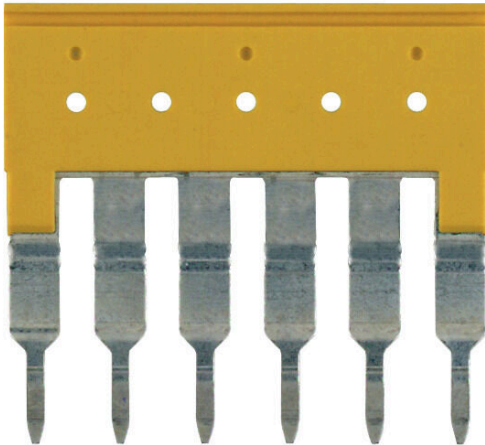


**ZQV 4/6 GE****Weidmüller Interface GmbH & Co. KG**Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

**Product image**

The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

**General ordering data**

Version	Accessories, Cross-connector, 32 A
Order No.	<a href="#">1608990000</a>
Type	ZQV 4/6 GE
GTIN (EAN)	4008 190263263
Qty.	20 items

## ZQV 4/6 GE

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

## Approvals

ROHS	Conform
------	---------

## Dimensions and weights

Depth	31.6 mm	Depth (inches)	1.2441 inch
Height	34.9 mm	Height (inches)	1.374 inch
Width	2.8 mm	Width (inches)	0.1102 inch
Net weight	5.15 g		

## Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-60 °C...85 °C
Continuous operating temp., min.	-60 °C	Continuous operating temp., max.	130 °C

## Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption		
REACH SVHC	No SVHC above 0.1 wt%		
Product Carbon Footprint	Cradle to gate	0.075 kg CO2 eq.	

## Material data

Basic material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

## System specifications

Version	For the terminals
---------	-------------------

## Additional technical data

Type of fixing	Plugged	Installation advice	Direct mounting
Explosion-tested version	Yes		

## Dimensions

Pitch in mm (P)	6.10 mm
-----------------	---------

## General

Number of poles	6	Installation advice	Direct mounting
-----------------	---	---------------------	-----------------

## Rating data

Rated voltage	400 V	Nominal current	32 A
---------------	-------	-----------------	------

## Important note

Product information	Due to stability and temperature reasons It is only possible to break out 60% of contact elements. The usage of cross connectors reduces the rated voltage to 400 V. The voltage reduced to 25 V if cut cross connection with blank cut edges are used. Cross connections with >10 poles have bare cut edges ex works.
---------------------	--

## Technical data

### Classifications

ETIM 8.0	EC000489	ETIM 9.0	EC000489
ETIM 10.0	EC000489	ECLASS 14.0	27-25-03-03
ECLASS 15.0	27-25-03-03		