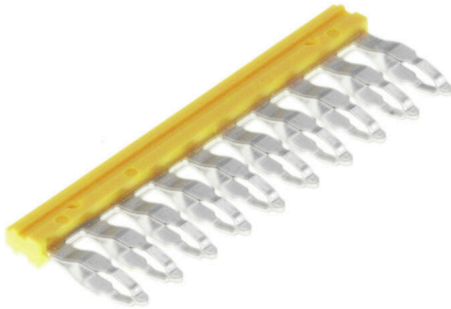


**ZQV 1.5N/R3.5/10 GE**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

**Product image**

The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

**General ordering data**

Version	Accessories, Cross-connector, 17.5 A
Order No.	<a href="#">1754290000</a>
Type	ZQV 1.5N/R3.5/10 GE
GTIN (EAN)	4032248027415
Qty.	20 items

## ZQV 1.5N/R3.5/10 GE

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Technical data

## Approvals

ROHS	Conform
------	---------

## Dimensions and weights

Depth	12.15 mm	Depth (inches)	0.4783 inch
Height	34.1 mm	Height (inches)	1.3425 inch
Width	2.4 mm	Width (inches)	0.0945 inch
Net weight	1.72 g		

## Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-50 °C...75 °C
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

## Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

## Material data

Basic material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

## System specifications

Version	For the terminals
---------	-------------------

## Additional technical data

Type of fixing	Plugged	Explosion-tested version	Yes
----------------	---------	--------------------------	-----

## Dimensions

Pitch in mm (P)	3.50 mm
-----------------	---------

## General

Number of poles	10
-----------------	----

## Rating data

Rated voltage	400 V	Nominal current	17.5 A
---------------	-------	-----------------	--------

## Important note

Product information	Due to stability and temperature reasons It is only possible to break out 60% of contact elements. The usage of cross connectors reduces the rated voltage to 400 V. The voltage reduced to 25 V if cut cross connection with blank cut edges are used.
---------------------	---

## Classifications

ETIM 8.0	EC000489	ETIM 9.0	EC000489
ETIM 10.0	EC000489	ECLASS 14.0	27-25-03-03
ECLASS 15.0	27-25-03-03		