

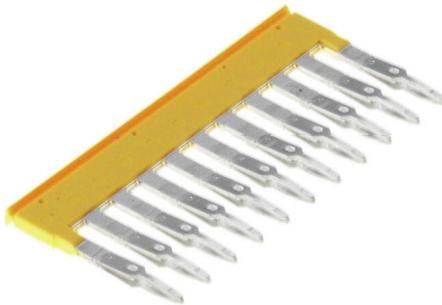
**ZQV 2.5/11****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image**

The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

**General ordering data**

Version	Z-series, Cross-connector, For the terminals, Number of poles: 11
Order No.	<a href="#">1859080000</a>
Type	ZQV 2.5/11
GTIN (EAN)	4032248411047
Qty.	20 items

## ZQV 2.5/11

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Technical data

## Approvals

ROHS	Conform
------	---------

## Dimensions and weights

Depth	27.6 mm	Depth (inches)	1.0866 inch
Height	54.4 mm	Height (inches)	2.1417 inch
Width	2.8 mm	Width (inches)	0.1102 inch
Net weight	8.05 g		

## Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-60 °C...85 °C
Continuous operating temp., min.	-60 °C	Continuous operating temp., max.	130 °C

## Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

## Material data

Basic material	Wemid	Colour	yellow
UL 94 flammability rating	V-0		

## System specifications

Version	For the terminals
---------	-------------------

## Additional technical data

Type of fixing	Plugged	Explosion-tested version	No
----------------	---------	--------------------------	----

## Dimensions

Pitch in mm (P)	5.10 mm
-----------------	---------

## General

Number of poles	11
-----------------	----

## Rating data

Rated voltage	400 V	Nominal current	24 A
---------------	-------	-----------------	------

## Important note

Product information Due to stability and temperature reasons It is only possible to break out 60% of contact elements. The usage of cross connectors reduces the rated voltage to 400 V. The voltage reduced to 25 V if cut cross connection with blank cut edges are used. Cross connections with >10 poles have bare cut edges ex works.

## Classifications

ETIM 8.0	EC000489	ETIM 9.0	EC000489
ETIM 10.0	EC000489	ECLASS 14.0	27-25-03-03

**Technical data**

---

ECLASS 15.0

27-25-03-03

---