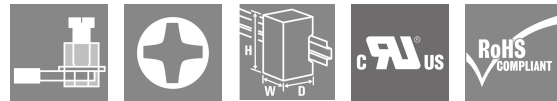


CMA-41-1000-5A-5VA-0,5**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Plug-on current transformers**

Plug-on current transformers are used wherever high currents of up to 5000A need to be measured and processed. Our plug-on current transformers supply secondary currents of 1A or 5A. Weidmüller also offers compact low-power current transformers to convert currents of up to 600 A to voltages of up to 333 mV.

General ordering data

Version	Primary current: 1000 A, Secondary current max.: 5 A, Load: , Tolerance class: , closed current transformer
Order No.	2680210000
Type	CMA-41-1000-5A-5VA-0,5
GTIN (EAN)	4050118696547
Qty.	1 items
Delivery status	This article will no longer be available in the future.
Available until	2025-04-08T00:00:00+02:00
Manufacturer	MBS AG

CMA-41-1000-5A-5VA-0,5

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

ROHS	Conform
------	---------

Dimensions and weights

Net weight	321 g
------------	-------

Temperatures

Storage temperature	Operating temperature
---------------------	-----------------------

Environmental Product Compliance

RoHS Compliance Status	Compliant
REACH SVHC	No SVHC above 0.1 wt%

Dimensions of live conductors

Type of conductor	Insulated conductor only	Round conductor	31.00 mm
Rail	30 x 15 mm, 40 x 10 mm	Installation location	Indoor use

Electrical attributes

Secondary current	0...5 A	Primary current	1000 A
-------------------	---------	-----------------	--------



Technical properties

Protection degree	IP20	Thermal rated continuous current $I_{thermal}$	1.2 x I_{rated}
Nominal frequency	50 Hz		

Classifications

ETIM 8.0	EC002048	ETIM 9.0	EC002048
ETIM 10.0	EC002048	ECLASS 14.0	27-21-09-02
ECLASS 15.0	27-21-09-02		

Drawings

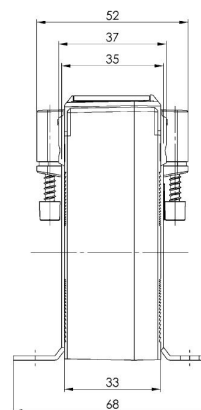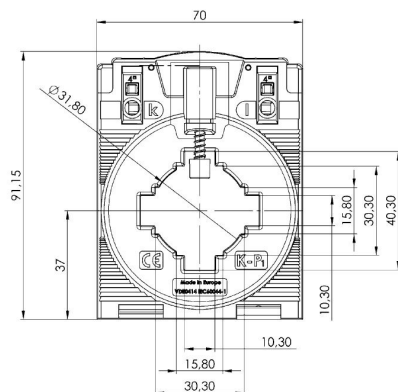

CMA-41-1000-5A-5VA-0,5**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Accessories****Plug-on current transformer - ValueLine****Plug-on current transformers**

Plug-on current transformers are used wherever high currents of up to 5000A need to be measured and processed. Our plug-on current transformers supply secondary currents of 1A or 5A. Weidmüller also offers compact low-power current transformers to convert currents of up to 600 A to voltages of up to 333 mV.

General ordering data

Type	CMA-31-41-SNAP-ON	Version	
Order No.	2723380000		
GTIN (EAN)	4050118810622		
Qty.	1 ST		