

Cross-connection for the sockets in the D-SERIES DRI.

**General ordering data**

Version	D-SERIES, Cross-connector
Order No.	<a href="#">7760056366</a>
Type	SCM/SDI P CC
GTIN (EAN)	6944 1697 7332 7
Qty.	10 items

## Technical data

### Approvals

ROHS	Conform
------	---------

### Dimensions and weights

Depth	18.2 mm	Depth (inches)	0.7165 inch
Height	5.7 mm	Height (inches)	0.2244 inch
Width	12.1 mm	Width (inches)	0.4764 inch
Net weight	1 g		

### Temperatures

Storage temperature	Operating temperature
---------------------	-----------------------

### Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

### Cross-connection data

Rated voltage	250 V	Rated current	2 A
Insulation	Yes	Touch-safe protection	Yes
Colour	orange	Number of cross-connected terminals	2
Number of poles	2	Pitch in mm (P)	8.00 mm
Type of mounting	Plugged	Version	for D-SERIES sockets with PUSH IN connection

### General data

Version	for D-SERIES sockets with PUSH IN connection	Colour	orange
---------	--	--------	--------

### Insulation coordination

Rated voltage	250 V
---------------	-------


### Connection data

Pitch in mm (P)	8.00 mm
-----------------	---------

### Classifications

ETIM 8.0	EC002586	ETIM 9.0	EC002586
ETIM 10.0	EC002586	ECLASS 14.0	27-37-16-92
ECLASS 15.0	27-37-16-92		


**Dimensional drawing**

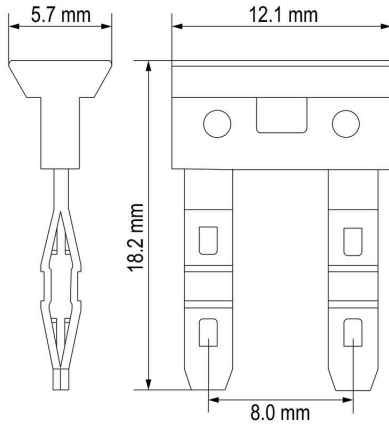

**Example of use**

**How to install cross connection**

to cross connect A2 contacts of SDI... PUSH IN sockets

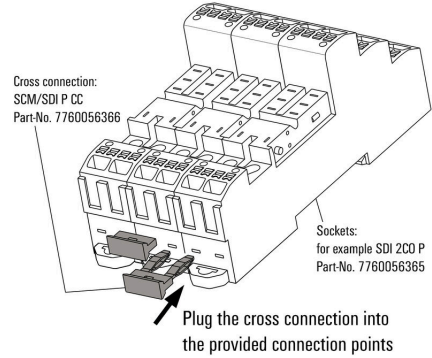


How to install cross connection to cross connect A2 contacts of SDI... PUSH IN sockets

**Example of use**

**How to install cross connection**

to cross connect A2 contacts of SCM... PUSH IN sockets

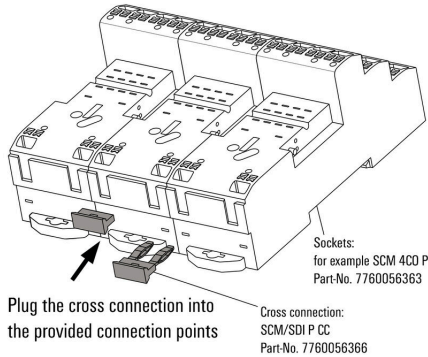

How to install cross connection to cross connect A2 contacts of SCM... PUSH IN sockets

**Example of use**

**Cross connection**

between SDI... and SCM... PUSH IN sockets is possible

