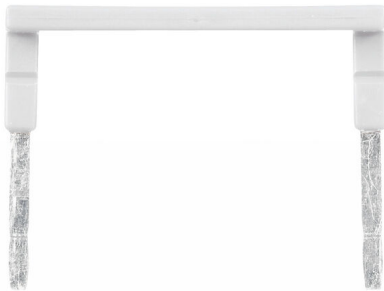


SCM-I QV P**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Cross-connection for the sockets in the RIDERSERIES
RCM

General ordering data

Version	RIDERSERIES RCM, Cross-connector
Order No.	8870850000
Type	SCM-I QV P
GTIN (EAN)	4032248631698
Qty.	10 items
Delivery status	This article will no longer be available in the future.
Last order date	2026-06-30T00:00:00+02:00
Alternative product	CXM CCP 2P RD

SCM-I QV P

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

ROHS	Conform
------	---------

Dimensions and weights

Width	28 mm	Width (inches)	1.1024 inch
Net weight	1.1 g		

Temperatures

Storage temperature	-40 °C...85 °C	Ambient temperature	-45 °C...70 °C
Operating temperature		Humidity	40 °C / 93 % rel. humidity, no condensation

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Cross-connection data

Rated current	12 A	Insulation	Yes
Touch-safe protection	Yes	Colour	white
Number of cross-connected terminals	2	Number of poles	2
Pitch in mm (P)	25.50 mm	Type of mounting	Plugged

General data

Colour	white
--------	-------

Connection data

Pitch in mm (P)	25.50 mm
-----------------	----------


Classifications

ETIM 8.0	EC002586	ETIM 9.0	EC002586
ETIM 10.0	EC002586	ECLASS 14.0	27-37-16-92
ECLASS 15.0	27-37-16-92		

Drawings


Example of use

How to install cross connection

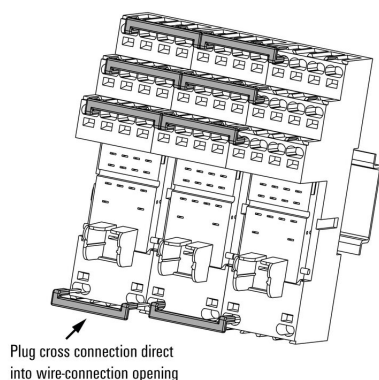

Plug the cross-connection in the cable connections

Example of use

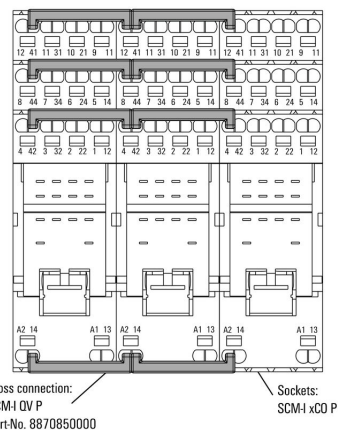

Cross-connector bridges to the same connection on the neighbouring base