

SCM-I QV P

Weidmüller Interface GmbH & Co. KG  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

Product image



Cross-connection for the sockets in the RIDERSERIES RCM

General ordering data

Version	RIDERSERIES RCM, Cross-connector
Order No.	<a href="#">8870850000</a>
Type	SCM-I QV P
GTIN (EAN)	4032248631698
Qty.	10 items
Delivery status	This article will no longer be available in the future.
Available until	2026-06-30T00:00:00+02:00
Alternative product	<a href="#">CXM CCP 2P RD</a>

**SCM-I QV P**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Technical data**

**Approvals**

ROHS Conform

**Dimensions and weights**

Width	28 mm	Width (inches)	1.1024 inch
Net weight	1.1 g		

**Temperatures**

Storage temperature	-40 °C...85 °C	Ambient temperature	-45 °C...70 °C
Operating temperature		Humidity	40 °C / 93 % rel. humidity, no condensation

**Environmental Product Compliance**

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

**Cross-connection data**

Rated current	12 A	Insulation	Yes
Touch-safe protection	Yes	Colour	white
Number of cross-connected terminals	2	Number of poles	2
Pitch in mm (P)	25.50 mm	Type of mounting	Plugged

**General data**

Colour white

**Connection data**


Pitch in mm (P) 25.50 mm

**Classifications**

ETIM 8.0	EC002586	ETIM 9.0	EC002586
ETIM 10.0	EC002586	ECLASS 14.0	27-37-16-92
ECLASS 15.0	27-37-16-92		

Example of use


How to install cross connection

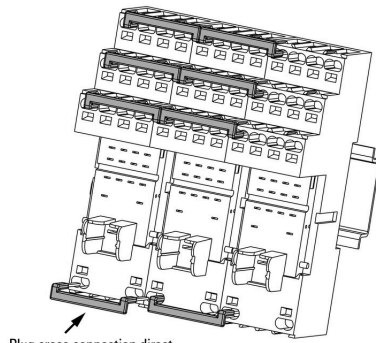

Plug cross connection direct into wire-connection opening

Plug the cross-connection in the cable connections

Example of use

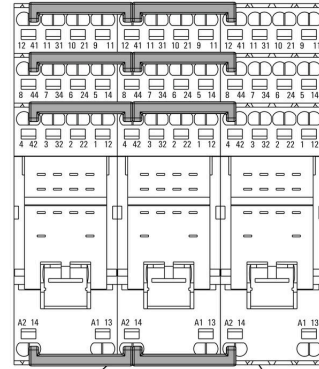

Cross connection: SCM-I QV P Part-No. 8870850000  
Sockets: SCM-I xCO P

Cross-connector bridges to the same connection on the neighbouring base