

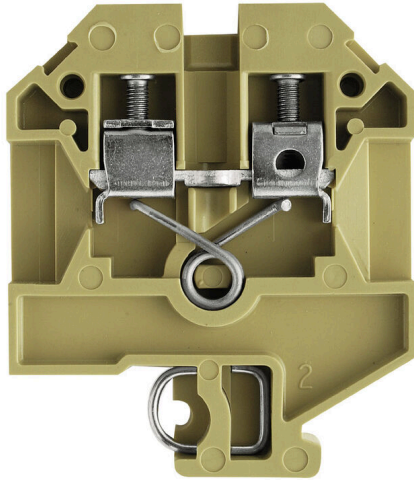
RSF 3 PA**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

General ordering data

| | |
|------------|--|
| Version | Feed-through terminal block, Screw connection, beige / yellow, 4 mm ² , 32 A, 630 V, Number of connections: 2 |
| Order No. | 0497560000 |
| Type | RSF 3 PA |
| GTIN (EAN) | 4008190158590 |
| Qty. | 50 items |

RSF 3 PA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS Conform

UL File Number Search [UL Website](#)

Certificate No. (UR) E60693

Dimensions and weights

| | | | |
|------------|--------|-----------------|-------------|
| Depth | 60 mm | Depth (inches) | 2.3622 inch |
| Height | 50 mm | Height (inches) | 1.9685 inch |
| Width | 8 mm | Width (inches) | 0.315 inch |
| Net weight | 18.7 g | | |

Temperatures

| | | | |
|----------------------------------|----------------|----------------------------------|----------------|
| Storage temperature | -25 °C...55 °C | Ambient temperature | -50 °C...55 °C |
| Continuous operating temp., min. | -50 °C | Continuous operating temp., max. | 100 °C |

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC | No SVHC above 0.1 wt% |

Material data

| | | | |
|---------------------------|-------|--------|----------------|
| Basic material | PA 66 | Colour | beige / yellow |
| UL 94 flammability rating | V-2 | | |

System specifications

| | | | |
|-------------------------------------|---|-------------------------------|-----|
| Version | Screw connection, with spring-loaded cable clamp, for screwable cross-connection, One end without connector | End cover plate required | Yes |
| Number of potentials | 1 | Number of levels | 1 |
| Number of clamping points per level | 2 | Number of potentials per tier | 1 |
| Levels cross-connected internally | No | PE connection | No |
| Mounting rail | TS 32 | | |

Additional technical data

| | | | |
|---------------------|-----------------|-----------------------------|----|
| Open sides | right | Number of similar terminals | 1 |
| Installation advice | Direct mounting | Explosion-tested version | No |
| Type of mounting | Snap-on | | |

CSA rating data

| | | | |
|-------------------------------|--------|-----------------------|-----------|
| Wire cross section max. (CSA) | 12 AWG | Voltage size C (CSA) | 600 V |
| Current size C (CSA) | 25 A | Certificate No. (CSA) | 12400-275 |
| Voltage size B (CSA) | 600 V | Current size B (CSA) | 25 A |
| Voltage size D (CSA) | 600 V | Current size D (CSA) | 5 A |
| Wire cross section min. (CSA) | 22 AWG | | |

RSF 3 PA

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Conductors for clamping (additional connection)

Connection type, additional connection Screw connection

Conductors for clamping (rated connection)

| | | | |
|---|----------------------|---|----------------------|
| Wire connection cross section AWG, max. | AWG 12 | Connection direction | on side |
| Tightening torque, max. | 1 Nm | Tightening torque, min. | 0.5 Nm |
| Stripping length | 12 mm | Type of connection | Screw connection |
| Number of connections | 2 | Clamping range, max. | 4 mm ² |
| Clamping range, min. | 0.33 mm ² | Clamping screw | M 3 |
| Blade size | 0.6 x 3.5 mm | Wire connection cross section AWG, min. | AWG 22 |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 4 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.33 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 4 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.33 mm ² |
| Wire connection cross section, finely stranded, max. | 4 mm ² | Wire connection cross section, finely stranded, min. | 0.33 mm ² |
| Connection cross-section, stranded, max. | 4 mm ² | Connection cross-section, stranded, min. | 0.33 mm ² |
| Torque level with DMS electric screwdriver | 2 | Wire connection cross-section, solid core, max. | 4 mm ² |
| Wire connection cross-section, solid core, min. | 0.33 mm ² | Connection cross-section, finely stranded, min. | 0.33 mm ² |

General

| | | | |
|---|--------|---------------------|-----------------|
| Wire connection cross section AWG, max. | AWG 12 | Installation advice | Direct mounting |
| Wire connection cross section AWG, min. | AWG 22 | Standards | IEC 60947-7-1 |
| Mounting rail | TS 32 | | |

Rating data

| | | | |
|--|-------------------|---------------------------------|---------------|
| Rated cross-section | 4 mm ² | Rated voltage | 630 V |
| Rated DC voltage | 630 V | Nominal current | 32 A |
| Current at maximum wires | 32 A | Standards | IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 1 mΩ | Rated impulse withstand voltage | 6 kV |
| Power loss in accordance with IEC 60947-7-x | 1.02 W | Pollution severity | 3 |

UL rating data

| | | | |
|---|--------|---|--------|
| Conductor size Factory wiring max. (UR) | 12 AWG | Current size C (UR) | 20 A |
| Voltage size C (UR) | 600 V | Conductor size Factory wiring min. (UR) | 26 AWG |
| Certificate No. (UR) | E60693 | Conductor size Field wiring min. (UR) | 22 AWG |
| Conductor size Field wiring max. (UR) | 12 AWG | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 8.0 | EC000897 | ETIM 9.0 | EC000897 |
| ETIM 10.0 | EC000897 | ECLASS 14.0 | 27-25-01-01 |
| ECLASS 15.0 | 27-25-01-01 | | |