


## DEK 5 GW C

Weidmüller Interface GmbH & Co. KG  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

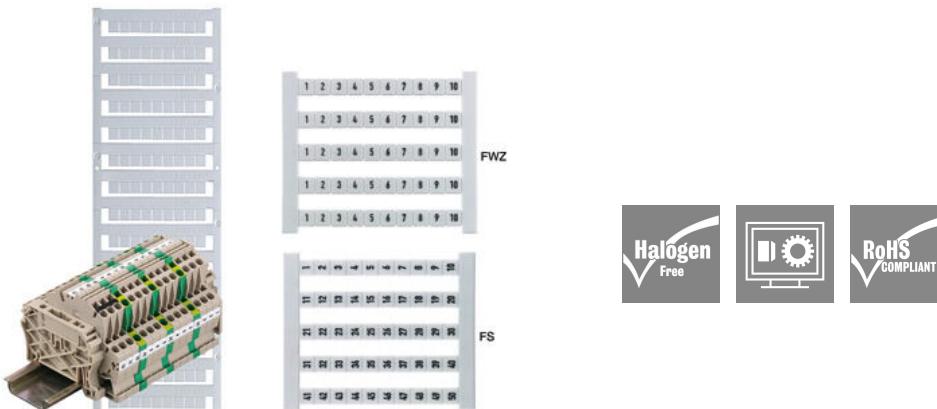

The dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a large range of ready-printed markers. Strips for fast installation in one work step. The printing is easy to read, rich in contrast, and is available in five widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank cards, MultiCard or as cards with standard printing

## General ordering data

Version	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 Weidmüller, white
Order No.	<a href="#">0522761023</a>
Type	DEK 5 GW C
GTIN (EAN)	4008190085278
Qty.	500 items
Alternative product	<a href="#">DEK 5/5 PLUS MC SDR</a>

## DEK 5 GW C

Weidmüller Interface GmbH & Co. KG  
Klingenbergsstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

## Approvals

RoHS	Conform
------	---------

## Dimensions and weights

Height	5 mm	Height (inches)	0.1968 inch
Width	5 mm	Width (inches)	0.1968 inch
Net weight	0.06 g		

## Temperatures

Operating temperature range	-40...100 °C
-----------------------------	--------------

## Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%
Product Carbon Footprint	Cradle to gate 0.001 kg CO2 eq.

## General data

Material colour according to resistance code	9
--	---

Orientation of print	horizontal
Printing method	MC Laser
Width	5 mm
UL 94 flammability rating	V-2
Operating temperature range, max.	100 °C
Operating temperature range, min.	-40 °C
Colour	white
Halogen	No
Basic material	Polyamide 66
Colour of printing	black
Printed characters	Upper-case letters
Number of markers per packaging unit	Form of supply
Number of markers per combination	Card
Operating temperature range	1 Card = Terminal marker
Application/manufacturer	-40...100 °C
Application/manufacturer	Weidmüller

## Connector markers

Pitch in mm (P)	5.00 mm
-----------------	---------

## Classifications

ETIM 8.0	EC000761	ETIM 9.0	EC000761
ETIM 10.0	EC000761	ECLASS 14.0	27-28-11-01
ECLASS 15.0	27-28-11-01		