


VT SF 6/21 MC NE GE V0

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

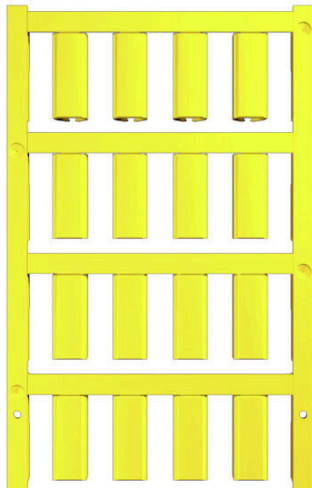

Similar to illustration



SlimFix are conductor and cable markers with a space-saving design. The markers can be fitted even after the conductor has been installed. They consist of halogen-free material and comply with flammability rating V0/V2. SlimFix is an acknowledged and accredited marker type for traffic engineering applications. The SF tool allows easy installation, even in case of small markers.

Advantages:

- Halogen-free material
- Flammability rating V0/V2
- Approved and accredited markers for traffic engineering applications, etc.
- Has to be fixed with cable ties if the conductor cross-section is larger than 16.0 mm²
- Markers in proven MultiCard format

General ordering data

| | |
|------------|-------------------------------------------------------------------------|
| Version | SlimFix, Conductor and cable markers, 5.8 - 7.8 mm, 21 x 8.4 mm, yellow |
| Order No. | 1730560004 |
| Type | VT SF 6/21 MC NE GE V0 |
| GTIN (EAN) | 4008190954642 |
| Qty. | 160 items |

VT SF 6/21 MC NE GE V0

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Dimensions and weights

| | | | |
|------------|--------|-----------------|-------------|
| Depth | 8.5 mm | Depth (inches) | 0.3346 inch |
| Height | 21 mm | Height (inches) | 0.8268 inch |
| Width | 8.4 mm | Width (inches) | 0.3307 inch |
| Net weight | 0.99 g | | |

Temperatures

| | |
|-----------------------------|--------------|
| Operating temperature range | -50...120 °C |
|-----------------------------|--------------|

Environmental Product Compliance

| | | | |
|--------------------------|-----------------------------|------------------|--|
| RoHS Compliance Status | Compliant without exemption | | |
| REACH SVHC | No SVHC above 0.1 wt% | | |
| Product Carbon Footprint | Cradle to gate | 0.006 kg CO2 eq. | |

General data

| | | | |
|--------------------------------------|---------------------------------------------------------------------------------------------|-----------|--|
| Type of printing | neutral | | |
| Width | 8.4 mm | | |
| UL 94 flammability rating | V-0 | | |
| Operating temperature range, max. | 120 °C | | |
| Operating temperature range, min. | -50 °C | | |
| Colour | yellow | | |
| Halogen | No | | |
| Basic material | Polyamide 66 | | |
| Number of markers per packaging unit | Form of supply | MultiCard | |
| Size of labelling field | 21 x 8.4 mm | | |
| Recommended industries | Transportation, Machinery | | |
| compatible printer | PRINTJET CONNECT , MCP BASIC 2 , MCP PLUS 2 | | |
| Number of markers per combination | 1 MultiCard = Conductor and cable markers | | |
| Operating temperature range | -50...120 °C | | |

Conductor and cable markers

| | | | |
|----------------------------------|-------------------------|-------------------------------|--------------------|
| Halogen | No | Conductor cross-section, max. | 16 mm ² |
| Conductor cross-section, min. | 10 mm ² | Conductor O.D., max. | 7.8 mm |
| Conductor O.D., min. | 5.8 mm | Conductor O.D. | 5.8 - 7.8 mm |
| Cross-section for connected wire | 10 - 16 mm ² | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 8.0 | EC001530 | ETIM 9.0 | EC001530 |
| ETIM 10.0 | EC001530 | ECLASS 14.0 | 27-28-11-02 |
| ECLASS 15.0 | 27-28-11-02 | | |

