


WS 12/6 PLUS MC SDR

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Similar to illustration

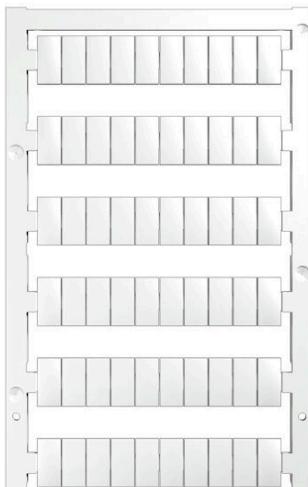

WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text.

WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Version	WS, Terminal marker, 12 x 6 mm, Pitch in mm (P): 6.00 Weidmüller, Allen-Bradley, To customer specification
Order No.	1927540000
Type	WS 12/6 PLUS MC SDR
GTIN (EAN)	4032248574711
Qty.	120 items

WS 12/6 PLUS MC SDR

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Approvals

RoHS	Conform
------	---------

Dimensions and weights

Height	12 mm	Height (inches)	0.4724 inch
Width	6 mm	Width (inches)	0.2362 inch
Net weight	0.13 g		

Temperatures

Operating temperature range	-40...100 °C
-----------------------------	--------------

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%
Product Carbon Footprint	Cradle to gate 0.002 kg CO ₂ eq.

General data

Material colour according to resistance code	9	
Orientation of print	horizontal and vertical	
Printing method	MC Laser	
Width	6 mm	
UL 94 flammability rating	V-2	
Operating temperature range, max.	100 °C	
Operating temperature range, min.	-40 °C	
Colour	To customer specification	
Basic material	Polyamide 66	
Colour of printing	black	
Printed characters	Requires M-Print PRO File	
Number of markers per packaging unit	Form of supply	MultiCard
Number of markers per combination	1 MultiCard = Terminal marker	
Operating temperature range	-40...100 °C	
Application/manufacturer	Weidmueller, Allen-Bradley	

Connector markers

Pitch in mm (P)	6.00 mm
-----------------	---------

Classifications

ETIM 8.0	EC000761	ETIM 9.0	EC000761
ETIM 10.0	EC000761	ECLASS 14.0	27-28-11-01
ECLASS 15.0	27-28-11-01		

WS 12/6 PLUS MC SDR

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26
D-32758 Detmold
Germany

Drawings

www.weidmueller.com

Similar to illustration**Drawing**