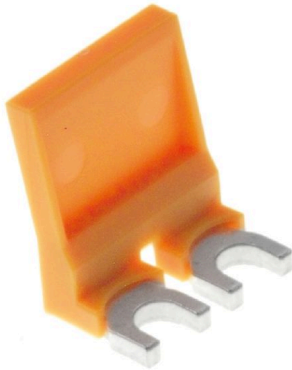


**Product image**

The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

**General ordering data**

Version	Accessories, Cross-connection slider
Order No.	<a href="#">1936190000</a>
Type	WKB 2/2
GTIN (EAN)	4032248605927
Qty.	50 items

## Technical data

### Approvals

ROHS	Conform
------	---------

### Dimensions and weights

Depth	16.1 mm	Depth (inches)	0.6339 inch
Height	9.41 mm	Height (inches)	0.3705 inch
Width	14.1 mm	Width (inches)	0.5551 inch
Net weight	1.67 g		

### Temperatures

Ambient temperature	-5 °C...40 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	100 °C		

### Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

### Material data

Basic material	Polyamide 66	Colour	orange
UL 94 flammability rating	V-2		

### System specifications

Version	Cross-connector
---------	-----------------

### Additional technical data

Type of fixing	when screwed in	Installation advice	Direct mounting
Explosion-tested version	No	Type of mounting	when screwed in

### Dimensions

Pitch in mm (P)	7.90 mm
-----------------	---------

### General

Number of poles	2	Installation advice	Direct mounting
Operating temperature range, max.	100 °C		

### Rating data

Nominal current	41 A
-----------------	------

### Classifications

ETIM 6.0	EC000489	ETIM 7.0	EC000489
ETIM 8.0	EC000489	ETIM 9.0	EC000489
ETIM 10.0	EC000489	ECLASS 9.0	27-14-11-40
ECLASS 9.1	27-14-11-40	ECLASS 10.0	27-14-11-40
ECLASS 11.0	27-14-11-40	ECLASS 12.0	27-14-11-40
ECLASS 13.0	27-25-03-03	ECLASS 14.0	27-25-03-03
ECLASS 15.0	27-25-03-03		