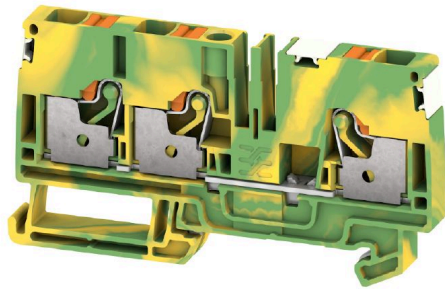


**A3C 6 PE DL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

**General ordering data**

|            |  |
|------------|--|
| Version    | PE terminal, PUSH IN, 6 mm <sup>2</sup> , Green/yellow |
| Order No.  | <a href="#">2674930000</a>                             |
| Type       | A3C 6 PE DL  |
| GTIN (EAN) | 4050118715965  |
| Qty.       | 50 items   |

## A3C 6 PE DL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

## Approvals

Approvals



|                           |                            |
|---------------------------|----------------------------|
| ROHS                      | Conform                    |
| UL File Number Search     | <a href="#">UL Website</a> |
| Certificate No. (cURus)   | E60693                     |
| Certificate No. (cURusEX) | E184763                    |

## Dimensions and weights

|                          |             |                |             |
|--------------------------|-------------|----------------|-------------|
| Depth                    | 45.5 mm     | Depth (inches) | 1.7913 inch |
| Depth including DIN rail | 46 mm       | Height         | 45.5 mm     |
| Height (inches)          | 1.7913 inch | Width          | 8.1 mm      |
| Width (inches)           | 0.3189 inch | Net weight     | 23.94 g     |

## Temperatures

|                                  |                |                                  |               |
|----------------------------------|----------------|----------------------------------|---------------|
| Storage temperature              | -25 °C...55 °C | Ambient temperature              | -5 °C...40 °C |
| Continuous operating temp., min. | -60 °C         | Continuous operating temp., max. | 130 °C        |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Material data

|                           |       |        |              |
|---------------------------|-------|--------|--------------|
| Basic material            | Wemid | Colour | Green/yellow |
| UL 94 flammability rating | V-0   |        |              |

## Rating data IECEx/ATEX

|                                |                   |                                 |                   |
|--------------------------------|-------------------|---------------------------------|-------------------|
| Certificate No. (ATEX)         | TUEV16ATEX7909U   | Certificate No. (IECEx)         | IECExTUR16.0036U  |
| Wire cross section max. (ATEX) | 6 mm <sup>2</sup> | Wire cross section max. (IECEx) | 6 mm <sup>2</sup> |

## System specifications

|                               |       |                                     |     |
|-------------------------------|-------|-------------------------------------|-----|
| End cover plate required      | Yes   | Number of potentials                | 1   |
| Number of levels              | 1     | Number of clamping points per level | 3   |
| Number of potentials per tier | 1     | PE connection                       | Yes |
| Mounting rail                 | TS 35 | PE function                         | Yes |
| PEN function                  | No    |                                     |     |

## Additional technical data

|                  |       |                          |     |
|------------------|-------|--------------------------|-----|
| Open sides       | right | Explosion-tested version | Yes |
| Type of mounting | TS 35 |                          |     |

## Technical data

### Conductors for clamping (additional connection)

Connection type, additional connection Screw connection

### Conductors for clamping (rated connection)

|   |  |  |                     |                   |
|---|--|--|---------------------|-------------------|
| Wire connection cross section AWG, max.   | AWG 8                                  |  |                     |                   |
| Connection direction  | top                                    |  |                     |                   |
| Stripping length  | 12 mm                                  |  |                     |                   |
| Type of connection  | PUSH IN                                |  |                     |                   |
| Number of connections   | 3                                      |  |                     |                   |
| Clamping range, max.  | 10 mm <sup>2</sup>                     |  |                     |                   |
| Clamping range, min.  | 0.34 mm <sup>2</sup>                   |  |                     |                   |
| Wire connection cross section AWG, min.   | AWG 22                                 |  |                     |                   |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 6 mm <sup>2</sup>                      |  |                     |                   |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.34 mm <sup>2</sup>                   |  |                     |                   |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 10 mm <sup>2</sup>                     |  |                     |                   |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.34 mm <sup>2</sup>                   |  |                     |                   |
| Wire connection cross section, finely stranded, max.                                    | 10 mm <sup>2</sup>                     |  |                     |                   |
| Wire connection cross section, finely stranded, min.                                    | 0.34 mm <sup>2</sup>                   |  |                     |                   |
| Connection cross-section, stranded, max.  | 6 mm <sup>2</sup>                      |  |                     |                   |
| Connection cross-section, stranded, min.  | 0.34 mm <sup>2</sup>                   |  |                     |                   |
| Twin wire-end ferrules, max.  | 1.5 mm <sup>2</sup>                    |  |                     |                   |
| Twin wire-end ferrules, min.  | 0.5 mm <sup>2</sup>                    |  |                     |                   |
| Wire connection cross-section, solid core, max.   | 6 mm <sup>2</sup>                      |  |                     |                   |
| Wire connection cross-section, solid core, min.   | 0.34 mm <sup>2</sup>                   |  |                     |                   |
| Connection cross-section, finely stranded, min.   | 0.34 mm <sup>2</sup>                   |  |                     |                   |
| Tube length for wire-end ferrule with plastic collar DIN 46228/4                        | Tube length                            | min.                                   | 10 mm               |                   |
|   |  | max.                                   | 12 mm               |                   |
|   | Cross-section for conductor connection | min.                                   | 0.5 mm <sup>2</sup> |                   |
|   |  | max.                                   | 1 mm <sup>2</sup>   |                   |
|   | Tube length                            | min.                                   | 10 mm               |                   |
|   |  | max.                                   | 18 mm               |                   |
|   | Cross-section for conductor connection | nominal                                | 1.5 mm <sup>2</sup> |                   |
|   | Tube length                            | min.                                   | 12 mm               |                   |
|   |  | max.                                   | 18 mm               |                   |
|   | Cross-section for conductor connection | nominal                                | 2.5 mm <sup>2</sup> |                   |
|   | Tube length                            | min.                                   | 10 mm               |                   |
|   |  | max.                                   | 18 mm               |                   |
|   |  | Cross-section for conductor connection | min.                | 4 mm <sup>2</sup> |
|   |  |  | max.                | 6 mm <sup>2</sup> |
| Tube length for twin wire-end ferrule   | Tube length                            | min.                                   | 10 mm               |                   |
|   |  | max.                                   | 12 mm               |                   |
|   | Cross-section for conductor connection | nominal                                | 0.5 mm <sup>2</sup> |                   |

## A3C 6 PE DL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

|   |  |         |                      |
|---|--|---------|----------------------|
| Tube length for wire-end ferrule without plastic collar DIN 46228/1           | Tube length                            | min.    | 10 mm                |
|   |  | max.    | 18 mm                |
|   | Cross-section for conductor connection | nominal | 0.75 mm <sup>2</sup> |
|   | Tube length                            | min.    | 12 mm                |
|   |  | max.    | 18 mm                |
|   | Cross-section for conductor connection | min.    | 1 mm <sup>2</sup>    |
|   |  | max.    | 1.5 mm <sup>2</sup>  |
|   | Tube length                            | nominal | 10 mm                |
|   | Cross-section for conductor connection | min.    | 0.5 mm <sup>2</sup>  |
|   |  | max.    | 1 mm <sup>2</sup>    |
|   | Tube length                            | min.    | 10 mm                |
|   | Cross-section for conductor connection | min.    | 1.5 mm <sup>2</sup>  |
| Tube length for wire-end ferrule with plastic collar acc. to cross-section    |  | max.    | 2.5 mm <sup>2</sup>  |
|   | Tube length                            | min.    | 12 mm                |
|   |  | max.    | 18 mm                |
|   | Cross-section for conductor connection | nominal | 4 mm <sup>2</sup>    |
|   | Tube length                            | min.    | 10 mm                |
|   |  | max.    | 18 mm                |
|   | Cross-section for conductor connection | min.    | 6 mm <sup>2</sup>    |
|   |  | max.    | 10 mm <sup>2</sup>   |
|   | Tube length, min.                      | 10 mm   |                      |
|   | Tube length, max.                      | 12 mm   |                      |
|   | Tube length, min.                      | 10 mm   |                      |
|   | Tube length, max.                      | 18 mm   |                      |
| Tube length for wire-end ferrule without plastic collar acc. to cross-section | Tube length, min.                      | 12 mm   |                      |
|   | Tube length, max.                      | 18 mm   |                      |
|   | Tube length, min.                      | 10 mm   |                      |
|   | Tube length, max.                      | 18 mm   |                      |
|   | Tube length, min.                      | 12 mm   |                      |
|   | Tube length, max.                      | 18 mm   |                      |
|   | Tube length, min.                      | 10 mm   |                      |
|   | Tube length, max.                      | 18 mm   |                      |
|   | Tube length, min.                      | 10 mm   |                      |
|   | Tube length, max.                      | 18 mm   |                      |
|   | Tube length, min.                      | 12 mm   |                      |
|   | Tube length, max.                      | 18 mm   |                      |
| Tube length for twin wire-end ferrule acc. to cross-section                   | Tube length, min.                      | 10 mm   |                      |
|   | Tube length, max.                      | 12 mm   |                      |
|   | Tube length, min.                      | 10 mm   |                      |
|   | Tube length, max.                      | 18 mm   |                      |
|   | Tube length, min.                      | 10 mm   |                      |
|   | Tube length, max.                      | 18 mm   |                      |

## General

|   |               |   |        |
|---|---------------|---|--------|
| Wire connection cross section AWG, max. | AWG 8         | Wire connection cross section AWG, min. | AWG 22 |
| Standards                               | IEC 60947-7-2 | Mounting rail                           | TS 35  |

## Rating data

|  |                   |                                     |               |
|--|-------------------|-------------------------------------|---------------|
| Rated cross-section                          | 6 mm <sup>2</sup> | Rated voltage to adjoining terminal | 800 V         |
| Rated DC voltage                             | 800 V             | Standards                           | IEC 60947-7-2 |
| Volume resistance according to IEC 60947-7-x | 0.78 mΩ           | Rated impulse withstand voltage     | 8 kV          |
| Power loss in accordance with IEC 60947-7-x  | 1.31 W            | Pollution severity                  | 3             |

**A3C 6 PE DL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold



Germany

[www.weidmueller.com](http://www.weidmueller.com)**Technical data****UL rating data**

|  |        |  |        |
|--|--------|--|--------|
| Conductor size Factory wiring max. (cURus) | 8 AWG  | Voltage size B (cURus)                     | 600 V  |
| Voltage size D (cURus)                     | 600 V  | Certificate No. (cURus)                    | E60693 |
| Conductor size Field wiring min. (cURus)   | 22 AWG | Conductor size Factory wiring min. (cURus) | 22 AWG |
| Voltage size C (cURus)                     | 600 V  | Conductor size Field wiring max. (cURus)   | 8 AWG  |


**Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000901    | ETIM 7.0    | EC000901    |
| ETIM 8.0    | EC000901    | ETIM 9.0    | EC000901    |
| ETIM 10.0   | EC000901    | ECLASS 9.0  | 27-14-11-41 |
| ECLASS 9.1  | 27-14-11-41 | ECLASS 10.0 | 27-14-11-41 |
| ECLASS 11.0 | 27-14-11-41 | ECLASS 12.0 | 27-14-11-41 |
| ECLASS 13.0 | 27-25-01-03 | ECLASS 14.0 | 27-25-01-03 |
| ECLASS 15.0 | 27-25-01-03 |             |             |

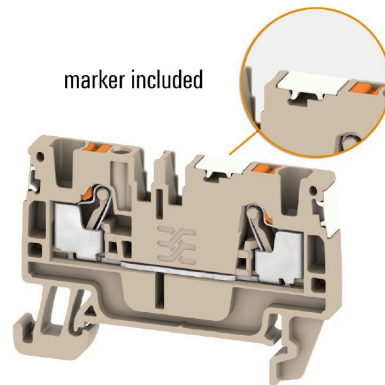

## Accessories

### End bracket



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

### General ordering data

|            |                            |                       |
|------------|----------------------------|-----------------------|
| Type       | AEB 35 SC/1                | Version               |
| Order No.  | <a href="#">1991920000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118376722              |                       |
| Qty.       | 50 ST                      |                       |

### Testadapter and testsockets



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

### General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | ATPG 6 MI-R                | Version  |
| Order No.  | <a href="#">1991930000</a> | Test adapter (terminal), 1.5 mm², 250 V, 0.2 A |
| GTIN (EAN) | 4050118376555              |  |
| Qty.       | 50 ST                      |  |
| Type       | ATPG 1.5-10 L              | Version  |
| Order No.  | <a href="#">1991890000</a> | Test adapter (terminal), 1.5 mm², 250 V, 0.2 A |
| GTIN (EAN) | 4050118376647              |  |
| Qty.       | 50 ST                      |  |

### Cross-connections



The distribution or multiplication of a potential to adjoining terminal blocks is realized via a cross-connection. Additional wiring effort can be easily avoided. Even if the poles are broken out, contact reliability in the terminal blocks is still ensured. Our portfolio offers pluggable and screwable cross-connection systems for modular terminal blocks.

## A3C 6 PE DL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | ZQV 6N/2                   | Version  |
| Order No.  | <a href="#">1985740000</a> | Cross-connector (terminal), Plugged, orange, 41 A, Number of poles:  |
| GTIN (EAN) | 4050118370362              | 2, Pitch in mm (P): 8.00, Insulated: Yes, Width: 13.7 mm             |
| Qty.       | 60 ST                      |  |
| Type       | ZQV 6N/2 BL                | Version  |
| Order No.  | <a href="#">1985830000</a> | Cross-connector (terminal), Plugged, blue, 41 A, Number of poles: 2, |
| GTIN (EAN) | 4050118370232              | Pitch in mm (P): 8.00, Insulated: Yes, Width: 13.7 mm                |
| Qty.       | 60 ST                      |  |
| Type       | ZQV 6N/3                   | Version  |
| Order No.  | <a href="#">1985760000</a> | Cross-connector (terminal), Plugged, orange, 41 A, Number of poles:  |
| GTIN (EAN) | 4050118370263              | 3, Pitch in mm (P): 8.00, Insulated: Yes, Width: 21.8 mm             |
| Qty.       | 60 ST                      |  |
| Type       | ZQV 6N/3 BL                | Version  |
| Order No.  | <a href="#">1985840000</a> | Cross-connector (terminal), Plugged, blue, 41 A, Number of poles: 3, |
| GTIN (EAN) | 4050118370379              | Pitch in mm (P): 8.00, Insulated: Yes, Width: 21.8 mm                |
| Qty.       | 60 ST                      |  |
| Type       | ZQV 6N/4                   | Version  |
| Order No.  | <a href="#">1985780000</a> | Cross-connector (terminal), Plugged, orange, 41 A, Number of poles:  |
| GTIN (EAN) | 4050118370287              | 4, Pitch in mm (P): 8.00, Insulated: Yes, Width: 29.9 mm             |
| Qty.       | 60 ST                      |  |
| Type       | ZQV 6N/4 BL                | Version  |
| Order No.  | <a href="#">1985850000</a> | Cross-connector (terminal), Plugged, blue, 41 A, Number of poles: 4, |
| GTIN (EAN) | 4050118370447              | Pitch in mm (P): 8.00, Insulated: Yes, Width: 29.9 mm                |
| Qty.       | 60 ST                      |  |

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
  - Strips for fast installation
  - Terminal markers, suitable for all Weidmüller cable connectors
  - Available as blank MultiCard or with standard printing
- For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | DEK 5/8 MC NE WS           | Version   |
| Order No.  | <a href="#">1856740000</a> | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248400850              | Weidmueller, white  |
| Qty.       | 800 ST                     |   |



## A3C 6 PE DL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
  - Strips for fast installation
  - Terminal markers, suitable for all Weidmüller cable connectors
  - Available as blank MultiCard or with standard printing
- For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | DEK 5/8 MC SDR             | Version   |
| Order No.  | <a href="#">1856750000</a> | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248400867              | Weidmueller, To customer specification                    |
| Qty.       | 160 ST                     |   |

## Plus



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
  - Strips for fast installation
  - Terminal markers, suitable for all Weidmüller cable connectors
  - Available as blank MultiCard or with standard printing
- For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | DEK 5/8 PLUS MC NE WS      | Version   |
| Order No.  | <a href="#">1046350000</a> | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248782055              | Weidmueller, white  |
| Qty.       | 800 ST                     |   |

## A3C 6 PE DL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.


- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | DEK 5/8 PLUS MC SDR        | Version   |
| Order No.  | <a href="#">1046370000</a> | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248782079              | Weidmueller, To customer specification                    |
| Qty.       | 160 ST                     |   |

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text.

WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | WS 10/8 PLUS MC NE WS      | Version  |
| Order No.  | <a href="#">1905950000</a> | WS, Terminal marker, 10 x 8 mm, Pitch in mm (P): 8.00 Weidmueller, |
| GTIN (EAN) | 4032248528103              | white  |
| Qty.       | 420 ST                     |  |

## A3C 6 PE DL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Custom printing



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | WS 10/8 PLUS MC SDR        | Version  |
| Order No.  | <a href="#">1906030000</a> | WS, Terminal marker, 10 x 8 mm, Pitch in mm (P): 8.00 Weidmueller, |
| GTIN (EAN) | 4032248528196              | To customer specification  |
| Qty.       | 84 ST                      |  |

## End plates and partition plates



End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

## General ordering data

|            |                            |                     |
|------------|----------------------------|---------------------|
| Type       | AEP 3C 6                   | Version             |
| Order No.  | <a href="#">1991940000</a> | A-series, End plate |
| GTIN (EAN) | 4050118376746              |                     |
| Qty.       | 50 ST                      |                     |
| Type       | AEP 3C 6 BL                | Version             |
| Order No.  | <a href="#">1991910000</a> | A-series, End plate |
| GTIN (EAN) | 4050118376548              |                     |
| Qty.       | 20 ST                      |                     |
| Type       | AEP 3C 6 OR                | Version             |
| Order No.  | <a href="#">2052530000</a> | A-series, End plate |
| GTIN (EAN) | 4050118412130              |                     |
| Qty.       | 20 ST                      |                     |

## A3C 6 PE DL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Digital current clamp devices




Digital current clamp devices and attachments and adapters are used for measuring AC and DC currents. The significant advantage of these devices is that you can make a measurement without breaking the flow of current.

## General ordering data

|            |                            |            |  |
|------------|----------------------------|------------|--|
| Type       | ZUB MULTIMETER             | Version    |  |
| Order No.  | <a href="#">9205270000</a> | Multimeter |  |
| GTIN (EAN) | 4032248723522              |            |  |
| Qty.       | 1 ST                       |            |  |

## End bracket




Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

|            |                            |                       |  |
|------------|----------------------------|-----------------------|--|
| Type       | AEB 35 SC/1 BK             | Version               |  |
| Order No.  | <a href="#">2475310000</a> | A-series, End bracket |  |
| GTIN (EAN) | 4050118487114              |                       |  |
| Qty.       | 50 ST                      |                       |  |

## Marker holder



The marker holder offer the possibility of additional mounting of standard markers with a pitch of 5 or 5.1 mm. The angled holders can be optionally snapped together and could be mounted in all standard marking channels of the Klippon® Connect modular terminal blocks. Fitting marker types could be found under the respective accessories of the designation marking holder.

## General ordering data

|            |                            |                            |  |
|------------|----------------------------|----------------------------|--|
| Type       | BZT 1 WS 10/5              | Version                    |  |
| Order No.  | <a href="#">1805490000</a> | Accessories, Marker holder |  |
| GTIN (EAN) | 4032248270231              |                            |  |
| Qty.       | 100 ST                     |                            |  |

## A3C 6 PE DL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                            |
|------------|----------------------------|----------------------------|
| Type       | BZT 1 ZA WS 10/5           | Version                    |
| Order No.  | <a href="#">1805520000</a> | Accessories, Marker holder |
| GTIN (EAN) | 4032248270248              |                            |
| Qty.       | 100 ST                     |                            |

## End plates and partition plates




End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

## General ordering data

|            |                            |                           |
|------------|----------------------------|---------------------------|
| Type       | APP 3                      | Version                   |
| Order No.  | <a href="#">2489100000</a> | A-series, Partition plate |
| GTIN (EAN) | 4050118499315              |                           |
| Qty.       | 50 ST                      |                           |

## Warning cover



Warning covers with a flash symbol provide more safety for man and machine. They are used where external voltage must be indicated within the application.

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | AAM 6 YE FLASH             | Version  |
| Order No.  | <a href="#">2635570000</a> | A-series, Terminal marker, 13 x 8.1 mm, Pitch in mm (P): 8.00 yellow |
| GTIN (EAN) | 4050118674514              |  |
| Qty.       | 40 ST                      |  |

## A3C 6 PE DL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## End bracket

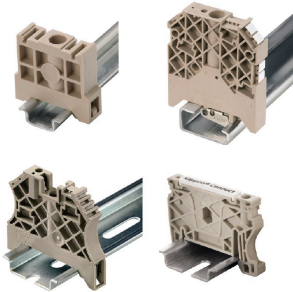

Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

|            |                            |                       |
|------------|----------------------------|-----------------------|
| Type       | AEB 35 SCL/1 V0            | Version               |
| Order No.  | <a href="#">2661280000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118702163              |                       |
| Qty.       | 20 ST                      |                       |
| Type       | AEB 35 SCL/1 V0 BK         | Version               |
| Order No.  | <a href="#">2661300000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118702187              |                       |
| Qty.       | 20 ST                      |                       |
| Type       | AEB 35 SCL/1 V0 GY         | Version               |
| Order No.  | <a href="#">2661290000</a> | A-series, End bracket |
| GTIN (EAN) | 4050118702170              |                       |
| Qty.       | 20 ST                      |                       |

## WS 8/8



## WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | WS-A 8/8 MM WS             | Version   |
| Order No.  | <a href="#">2448930000</a> | WS, Terminal marker, 8 x 8.1 mm, Weidmueller, white |
| GTIN (EAN) | 4050118462982              |   |
| Qty.       | 500 ST                     |   |

## A3C 6 PE DL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## DEK 5/8



## WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

## Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | DEK 5/8 MM WS              | Version  |
| Order No.  | <a href="#">2007130000</a> | Dekafix, Terminal marker, 5 x 8 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392012              |  |
| Qty.       | 500 ST                     |  |

## Slotted screwdriver



Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

## General ordering data

|            |                            |   |
|------------|----------------------------|---|
| Type       | SDS 1.0X5.5X150            | Version   |
| Order No.  | <a href="#">2749380000</a> | Screwdriver, Blade width (B): 5.5 mm, Blade length: 150 mm, Blade thickness (A): 1 mm |
| GTIN (EAN) | 4050118895605              |   |
| Qty.       | 1 ST                       |   |