


**ZS 30/5 MC SDR****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

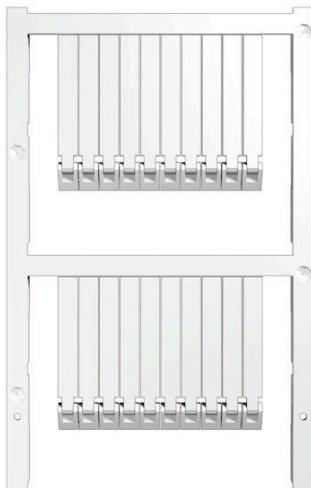

ZS markers - in proven MultiCard-format - have been developed specifically for the Z-series. They have a large printing area. The hinged mechanism even allows access to cross-connectors without dismantling. Quick installation is guaranteed by the fact that the single tags are clipped on in strips. The single tags are easy to separate.

- Hinged marker area
- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

**General ordering data**

Version	ZS, Terminal marker, 30 x 5 mm, Weidmueller, Allen-Bradley, To customer specification
Order No.	<a href="#">2682070000</a>
Type	ZS 30/5 MC SDR
GTIN (EAN)	4050118803075
Qty.	40 items

## ZS 30/5 MC SDR

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

## Technical data

### Approvals

ROHS	Conform
------	---------

### Dimensions and weights

Height	30 mm	Height (inches)	1.1811 inch
Width	5 mm	Width (inches)	0.1968 inch
Net weight	0.44 g		

### Temperatures

Operating temperature range	-40...100 °C
-----------------------------	--------------

### Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption		
REACH SVHC	No SVHC above 0.1 wt%		
Product Carbon Footprint	Cradle to gate	0.004 kg CO2 eq.	

### General data

Orientation of print	horizontal and vertical		
Width	5 mm		
UL 94 flammability rating	V-2		
Operating temperature range, max.	100 °C		
Operating temperature range, min.	-40 °C		
Colour	To customer specification		
Halogen	No		
Basic material	PA 66		
Printed characters	without		
Number of markers per packaging unit	Form of supply	MultiCard	
compatible printer	<a href="#">PRINTJET CONNECT</a> , <a href="#">MCP BASIC 2</a> , <a href="#">MCP PLUS 2</a>		
Number of markers per combination	1 MultiCard = Terminal marker		
Operating temperature range	-40...100 °C		
Application/manufacturer	Weidmueller, Allen-Bradley		

### Classifications

ETIM 8.0	EC000761	ETIM 9.0	EC000761
ETIM 10.0	EC000761	ECLASS 14.0	27-28-11-01
ECLASS 15.0	27-28-11-01		

**Drawings**

---

---



**Drawing**

---

---

---