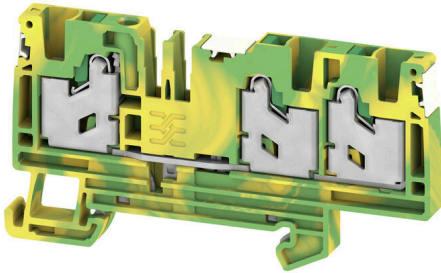


**S3C 4 PE DL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

To feed through power, signal, and data is the classical requirement in electrical engineering and panel building. The insulating material, the connection system and the design of the terminal blocks are the differentiating features. A feed-through terminal block is suitable for joining and/or connecting one or more conductors. They could have one or more connection levels that are on the same potential or insulated against one another.

**General ordering data**

Version	PE terminal, SNAP IN, Green/yellow, 4 mm <sup>2</sup> , 1000 V, Number of connections: 3, Number of levels: 1, TS 35, V-0, Wemid
Order No.	<a href="#">2874980000</a>
Type	S3C 4 PE DL
GTIN (EAN)	4064675650034
Qty.	50 items

## S3C 4 PE DL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Approvals

Approvals



ROHS Conform

UL File Number Search [UL Website](#)

Certificate No. (cURus) E60693

## Dimensions and weights

Depth	41.5 mm	Depth (inches)	1.6339 inch
Height	78 mm	Height (inches)	3.0709 inch
Width	6.1 mm	Width (inches)	0.2402 inch
Net weight	20.17 g		

## Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-60 °C
Continuous operating temp., max.	130 °C		

## Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

## Material data

Basic material	Wemid	Colour	Green/yellow
Colour of operational elements	green	UL 94 flammability rating	V-0

## Rating data IECEx/ATEX

Certificate No. (ATEX)	TUEV22ATEX8925U	Certificate No. (IECEX)	IECEXTUR22.0073U
Wire cross section max. (ATEX)	6 mm <sup>2</sup>	Wire cross section max. (IECEX)	6 mm <sup>2</sup>

## System specifications

End cover plate required	Yes	Number of potentials	1
Number of levels	1	Number of clamping points per level	3
Number of potentials per tier	1	PE connection	Yes
Mounting rail	TS 35	N-function	No
PE function	Yes	PEN function	No

## Additional technical data

Open sides	right	Snap-on	Yes
Type of fixing	Snap-on	Explosion-tested version	Yes
Type of mounting	TS 35		

## Conductors for clamping (additional connection)

Connection type, additional connection SNAP IN

## S3C 4 PE DL

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Conductors for clamping (rated connection)

Gauge to IEC 60947-1	A4	
Wire connection cross section AWG, max.	AWG 12	
Connection direction	top	
Stripping length	12 mm	
Type of connection	SNAP IN	
Number of connections	3	
Clamping range, max.	6 mm <sup>2</sup>	
Clamping range, min.	0.75 mm <sup>2</sup>	
Blade size	0.6 x 3.5 mm	
Wire connection cross section AWG, min.	AWG 20	
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	4 mm <sup>2</sup>	
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.75 mm <sup>2</sup>	
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	4 mm <sup>2</sup>	
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.75 mm <sup>2</sup>	
Wire connection cross section, finely stranded, max.	6 mm <sup>2</sup>	
Wire connection cross section, finely stranded, min.	0.75 mm <sup>2</sup>	
Connection cross-section, stranded, max.	4 mm <sup>2</sup>	
Connection cross-section, stranded, min.	0.75 mm <sup>2</sup>	
Twin wire-end ferrules, max.	1.5 mm <sup>2</sup>	
Twin wire-end ferrules, min.	0.5 mm <sup>2</sup>	
Wire connection cross-section, solid core, max.	6 mm <sup>2</sup>	
Wire connection cross-section, solid core, min.	0.75 mm <sup>2</sup>	
Connection cross-section, finely stranded, min.	0.75 mm <sup>2</sup>	
Tube length for wire-end ferrule with plastic collar acc. to cross-section	Cross-section, min.	0.5 mm <sup>2</sup>
	Cross-section, max.	1 mm <sup>2</sup>
	Tube length, min.	8 mm
	Tube length, max.	12 mm
	Cross-section, min.	1.5 mm <sup>2</sup>
	Cross-section, max.	2.5 mm <sup>2</sup>
	Tube length, min.	10 mm
	Tube length, max.	18 mm
	Cross-section, min.	4 mm <sup>2</sup>
	Cross-section, max.	4 mm <sup>2</sup>
	Tube length, min.	12 mm
	Tube length, max.	18 mm
Tube length for wire-end ferrule without plastic collar acc. to cross-section	Cross-section, min.	0.5 mm <sup>2</sup>
	Cross-section, max.	1 mm <sup>2</sup>
	Tube length, min.	10 mm
	Tube length, max.	10 mm
	Cross-section, min.	1.5 mm <sup>2</sup>
	Cross-section, max.	2.5 mm <sup>2</sup>
	Tube length, min.	10 mm

## S3C 4 PE DL

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

## Technical data

	Tube length, max.	18 mm
	Cross-section, min.	4 mm <sup>2</sup>
	Cross-section, max.	4 mm <sup>2</sup>
	Tube length, min.	12 mm
	Tube length, max.	18 mm
Tube length for twin wire-end ferrule acc. to cross-section	Cross-section, min.	0.5 mm <sup>2</sup>
	Cross-section, max.	0.5 mm <sup>2</sup>
	Tube length, min.	10 mm
	Tube length, max.	12 mm
	Cross-section, min.	0.75 mm <sup>2</sup>
	Cross-section, max.	0.75 mm <sup>2</sup>
	Tube length, min.	10 mm
	Tube length, max.	18 mm
	Cross-section, min.	1 mm <sup>2</sup>
	Cross-section, max.	1 mm <sup>2</sup>
	Tube length, min.	12 mm
	Tube length, max.	18 mm
	Cross-section, min.	1.5 mm <sup>2</sup>
	Cross-section, max.	2.5 mm <sup>2</sup>
	Tube length, min.	18 mm
	Tube length, max.	18 mm

### General

Wire connection cross section AWG, max.	AWG 12	Wire connection cross section AWG, min.	AWG 20
Standards	IEC 60947-7-2	Mounting rail	TS 35

### Rating data

Rated cross-section	4 mm <sup>2</sup>	Rated voltage to adjoining terminal	1000 V
Rated DC voltage	1000 V	Standards	IEC 60947-7-2
Volume resistance according to IEC 60947-7-x	1 mΩ	Rated impulse withstand voltage	8 kV
Power loss in accordance with IEC 60947-7-x	1.02 W	Surge voltage category	III
Pollution severity	3		

### UL rating data

Conductor size Factory wiring max. (cURus)	10 AWG	Certificate No. (cURus)	E60693
Conductor size Field wiring min. (cURus)	20 AWG	Conductor size Factory wiring min. (cURus)	20 AWG
Conductor size Field wiring max. (cURus)	10 AWG		

### Classifications

ETIM 8.0	EC000901	ETIM 9.0	EC000901
ETIM 10.0	EC000901	ECLASS 14.0	27-25-01-03
ECLASS 15.0	27-25-01-03		

**Drawings**

