

WIL-LXXXX-RXSS-5700-X190-M12X-X0

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com



Our L-series, as standard and premium variants, is the ideal surface mounted light for the industrial field. The swiveling mounting brackets allow for easy and direct mounting and positioning of the illumination field. With only one power supply, it is possible to connect several lights in series. Simple connection technology with circular connectors enables plug-and-play. A special safety glass protects against industrial influences and at the same time provides homogeneous illumination in the light color 5.700K.

General ordering data

| | |
|------------|--|
| Order No. | 2899210000 |
| Type | WIL-LXXXX-RXSS-5700-X190-M12X-X0 |
| GTIN (EAN) | 4064675906247 |
| Qty. | 1 items |

WIL-LXXXX-RXSS-5700-X190-M12X-X0

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Approvals

Approvals



ROHS Conform

UL File Number Search [UL Website](#)

Certificate No. (cURus) E354496

Dimensions and weights

| | | | |
|------------|--------|-----------------|-------------|
| Depth | 40 mm | Depth (inches) | 1.5748 inch |
| Height | 42 mm | Height (inches) | 1.6535 inch |
| Width | 190 mm | Width (inches) | 7.4803 inch |
| Net weight | 221 g | | |

Temperatures

Operating temperature -20 - 45°C

Environmental Product Compliance

RoHS Compliance Status Compliant with exemption

RoHS Exemption (if applicable/known) 6c

REACH SVHC Lead 7439-92-1

SCIP b1b97d04-507a-4265-bbfb-4e884ff5d5a9

Cable technical specifications

Housing main material hard anodised aluminium

Connection data

| | | | |
|-------------------------|--|-------------------|---------------|
| LED Modul is attachable | no | Version | pin, straight |
| Number of poles | 5 | Coding | A-coded |
| Connection thread | M12 | Tightening torque | 0.8 Nm |
| Wiring | Pin 1: control white LED 24V DC, Pin 2: NC, Pin 3: GND(-), Pin 4: NC, Pin 5: NC | | |

Electric data

| | | | |
|---------------|---------|---------------|----------|
| Rated voltage | 24 V DC | Rated current | 137.5 mA |
| Power | 3.3 W | Dimmable | Yes |

General technical data

| | | | |
|---|---------------|---------------------------------------|----------------|
| Type of connection | Pin connector | Electronic equipment on rolling stock | No |
| Light colour (CCT) | 5700K, White | Light current | 341 lm |
| Emitting angle | 100 ° | Illumination level | 135 lux |
| Operating life | 60.000 h | Type of mounting | Screw mounting |
| Drill hole spacing | 220 mm | Protection degree | IP67 |
| Efficiency class (according to EU Directive No. 874/2012) | Not required | | |

WIL-LXXXX-RXSS-5700-X190-M12X-X0

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com


Technical data**Material data**

| | | | |
|-----------------------|------|-----------------------|-------------------------|
| Material of LED cover | PMMA | Housing main material | hard anodised aluminium |
|-----------------------|------|-----------------------|-------------------------|


Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 8.0 | EC000996 | ETIM 9.0 | EC000996 |
| ETIM 10.0 | EC000996 | ECLASS 14.0 | 27-11-06-35 |
| ECLASS 15.0 | 27-11-06-35 | | |

Dimensioned drawing

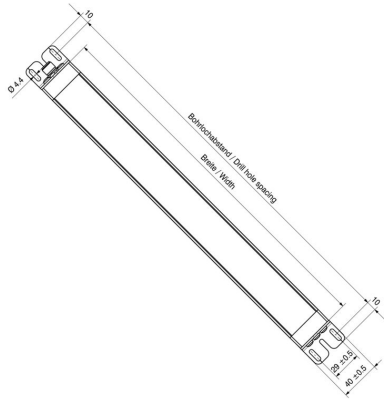

Pole scheme

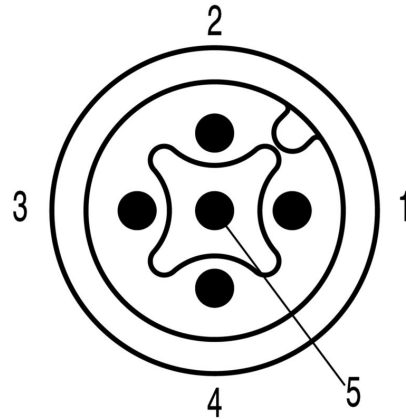


WIL-LXXXX-RXSS-5700-X190-M12X-X0

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Accessories

Screw terminal connector



Individual cable lengths are often required nowadays. In order to meet these demands, Weidmüller offers a wide range of plug-in connectors for custom assembly. Male plugs and female socket for customisable assembly for M8, M12, M16 and 7/8" connections which are highly robust and ideally suited to machine engineering, for instance. The M12 plug-in connectors offer a choice of 5 different connection systems.

The screw connection can be used in a wide range of applications. With this technology the conductor, optionally with wire-end ferrules, can be plugged into connection elements and secured with a screw. It is the classic, cheapest form of connection technology that also supports multi-conductor connections.

General ordering data

| | | | |
|------------|----------------------------|---------------------------------|--|
| Type | SAIBGS-P-5A-4/6-M12 | Version | |
| Order No. | 9457250000 | Field attachable connector, M12 | |
| GTIN (EAN) | 4032248155774 | | |
| Qty. | 1 ST | | |

PUR halogen-free black (U)



Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

Our developers have focused specifically on this issue and designed a host of different M8 and M12 sensor-actuator cables so you are bound to find the solution you need for your application.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

General ordering data

| | | | |
|------------|----------------------------|---|--|
| Type | SAIL-M12BG-5-1.5U | Version | |
| Order No. | 9457910150 | Sensor/actuator line, One end without connector, M12, Number of poles : 5, 1.5 m, Female socket, straight, Shielded: No, LED: No, | |
| GTIN (EAN) | 4032248528875 | Sheath material: PUR, Halogen: No | |
| Qty. | 1 ST | | |
| Type | SAIL-M12BG-5-3.0U | Version | |
| Order No. | 9457910300 | Sensor/actuator line, One end without connector, M12, Number of poles : 5, 3 m, Female socket, straight, Shielded: No, LED: No, Sheath material: PUR, Halogen: No | |
| GTIN (EAN) | 4032248228843 | | |
| Qty. | 1 ST | | |
| Type | SAIL-M12BG-5-5.0U | Version | |
| Order No. | 9457910500 | Sensor/actuator line, One end without connector, M12, Number of poles : 5, 5 m, Female socket, straight, Shielded: No, LED: No, Sheath material: PUR, Halogen: No | |
| GTIN (EAN) | 4032248228850 | | |
| Qty. | 1 ST | | |
| Type | SAIL-M12BG-5-10U | Version | |
| Order No. | 9457911000 | Sensor/actuator line, One end without connector, M12, Number of poles : 5, 10 m, Female socket, straight, Shielded: No, LED: No, | |
| GTIN (EAN) | 4032248228867 | Sheath material: PUR, Halogen: No | |
| Qty. | 1 ST | | |

WIL-LXXXX-RXSS-5700-X190-M12X-X0

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|---|
| Type | SAIL-M12GM12G-5-1.0U | Version |
| Order No. | 9457340100 | Sensor/actuator line, Connecting line, M12 / M12, Number of poles : |
| GTIN (EAN) | 4032248832583 | 5, 1 m, pin, straight - socket, straight, Shielded: No, LED: No, Sheath |
| Qty. | 1 ST | material: PUR, Halogen: No |
| Type | SAIL-M12GM12G-5-2.0U | Version |
| Order No. | 9457340200 | Sensor/actuator line, Connecting line, M12 / M12, Number of poles : |
| GTIN (EAN) | 4008190311285 | 5, 2 m, pin, straight - socket, straight, Shielded: No, LED: No, Sheath |
| Qty. | 1 ST | material: PUR, Halogen: No |
| Type | SAIL-M12GM12G-5-3.0U | Version |
| Order No. | 9457340300 | Sensor/actuator line, Connecting line, M12 / M12, Number of poles : |
| GTIN (EAN) | 4008190311896 | 5, 3 m, pin, straight - socket, straight, Shielded: No, LED: No, Sheath |
| Qty. | 1 ST | material: PUR, Halogen: No |